




Rider: Jack Derry // Photo: Anton McGeachen

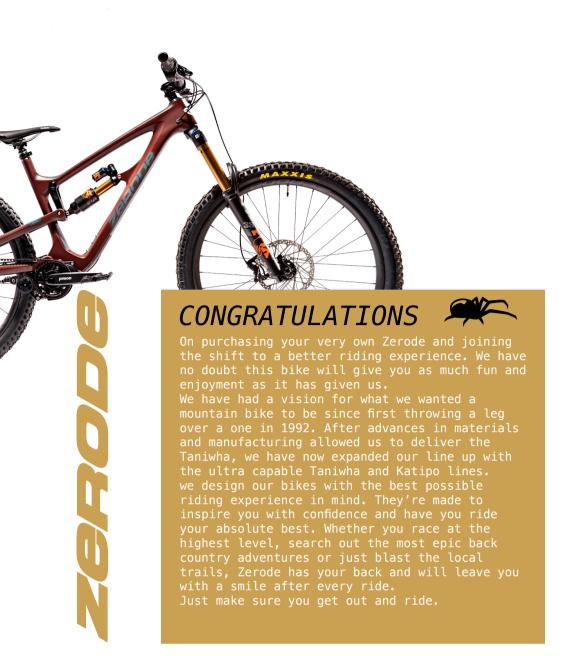

FRAME SPECIFICATIONS

FRAME MATERIAL	Carbon Fibre		
KATIPO WHEEL SIZE	29"		
TANIWHA WHEEL SIZE	27 . 5" Or Mixed		
SEATPOST DIAMETER	31.6mm		
SEATPOST CLAMP	34.9mm		
HEADSET	44/56		
BRAKE MOUNT	160mm post		
GEARBOX	Pinion P&C line		
HUB SPACING	142 single speed		

WARRANTY

Zerode frames are warranted against manufacturing defects in materials and/or workmanship for two years from the date of original purchase. This limited warranty applies only to the original owner of the bike and is not transferable to subsequent owners. This limited warranty is void if the bicycle is subjected to abuse, neglect, improper repair, improper maintenance, alteration, modification, an accident or other abnormal, excessive, or improper use.

MAINTENANCE

It is important to properly maintain and inspect your Zerode. Although they are less maintainance intensive than conventional mountain bikes they still require love from time to time.


You should regularly check pivots and pivot bolts, and insure your frame bearings are functioning to an acceptable standard. If you discover damage to any degree have your bike checked by a trusted bike shop. For a detailed care guide for your GATES CARBON DRIVE as well as the Zerode web support page see the QR codes below.

PINION GEARBOX

Gearboxes offer many advantages over traditional drive trains — less wear and tear, less maintenance and better suspension performance however, you will need to make some small adjustments to get the best of what the Pinion gearbox has to offer. The most important difference is that you cannot shift under load. For first-time users this may feel a little unusual however the shift is almost instantaneous and pedaling is not required to change gear. With a little practice eliminating load from the pedals will become second nature allowing seamless shifting through the gear range in situations not possible with a derailleur. For extensive service and trouble shooting guides follow the QR code below.



ITEM #	DESCRIPTION	QTY	TORQUE
1	Shock eye shaft (front triangle)	1	
2	Shock eye bolt (front triangle)	1	8.5 N M
3	Shock eye bolt washer (front triangle)	1	
4	Link pivot shaft (front triangle)	1	
4	Link pivot bolt (front triangle)	1	11.5 N M
6	Shock eye shaft washer	2	
7	Link bearing	4	
9	Internal routing cap	2	
10	Pivot shaft (rear triangle)	2	
11	Pivot bolt (rear triangle	2	8.5 N M
12	Pivot washer (rear triangle	2	
13	Inner pivot washer (rear triangle)	4	
14	Link	1	
15	Rear pivot spacer	2	
16	Pivot bearing (rear triangle)	4	
17	Wheel axle	1	
18	Wheel axle nut	1	
19	Main pivot shaft nut	1	
20	Wedge bolt	2	8.5 N M
21	Main pivot wedge washer	1	
22	Wedge	2	
23	Main pivot shaft	1	25 N M
24	Main pivot bearing	2	
25	Internal routing cap	2	
26	Main pivot bearing spacer	1	
27	Grommet	1	
28	Shock eye bolt link	1	11.5 N M
29	Link bearing spacer	1	
30	Link pivot shaft wedge	1	
31	Link pivot shaft	1	22 N M
33	Link pivot shaft wedge	1	

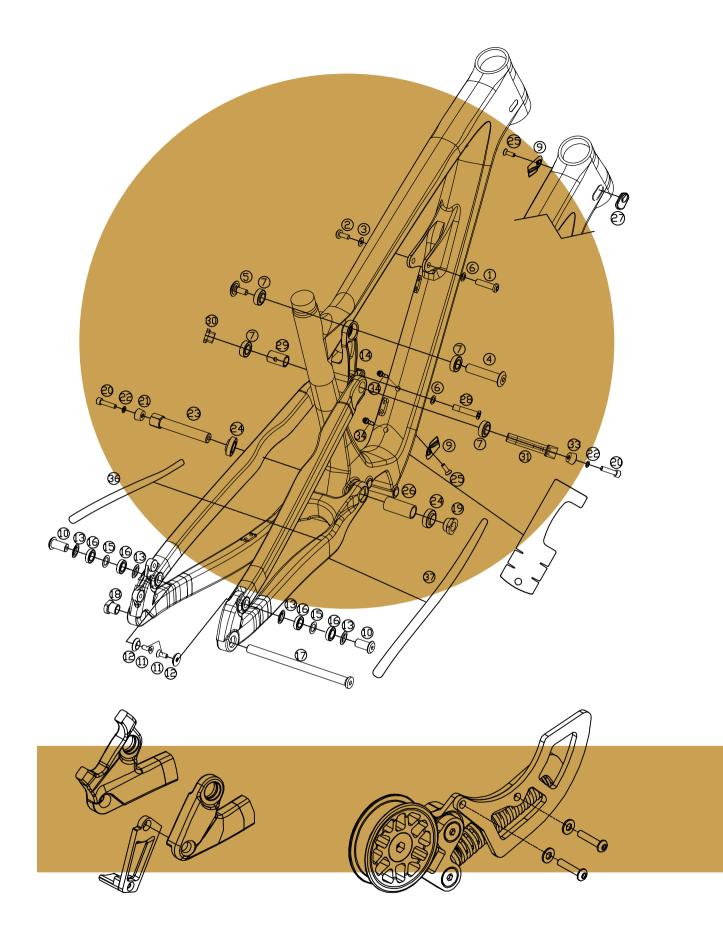

Thank you

We are a small team that loves what we do and buy purchasing this bike it means we can keep doing just that.

That's enough reading, now it's time to get out there and ride! We hope you love it as much as we do, happy trails!

Thanks from the small team at ZERODE BIKES