

NRFTR3

Rear suspension package Ensemble pour suspension arrière Ensemble para suspensión de trasero

Ref. = Reference = No. de référence = Núm. de referencia
Part = Part #. = No. de pièce = Núm. de pieza
Qty. = Quantity = Quantité = Cantidad

INSTALLATION INSTRUCTIONS

- Partially raise vehicle not allowing the axle to hang freely.
- Remove existing bump stop assembly.
- Assemble Aeon rubber spring and steel disc as shown in the adjacent diagram.
- Mount Timbren assembly using supplied fasteners. Tighten fasteners until snug.
- Lower vehicle.

Overall Height: 4"

Do not exceed vehicle manufacturer's recommended weight rating. Check for AEON® spring interference with vehicle components - Under load AEON® spring will "expand" in diameter.

INSTRUCTIONS DE MONTAGE

- Soulever partiellement le véhicule sans permettre à l'essieu our pendre librement.
- Retirez l'ensemble de butée de choc existant.
- Assembler le ressort en caoutchouc Aeon et l'acier disque comme indiqué dans le schéma ci-contre.
- Montez l'ensemble Timbren à l'aide du attaches. Serrez les attaches jusqu'à ce qu'elles soient bien serrées.
- Abaisser le véhicule.

Hauteur totale: 4"

Ne pas dépasser le poids nominal sur l'essieu recommandé par le fabricant du véhicule. Vérifier que le ressort AEON® n'a pas d'incidence sur d'autres pièces du véhicule - Le ressort AEON® augmentera son diamètre avec la charge.



INSTRUCCIONES DE INSTALACIÓN

- Elevar parcialmente el vehículo evitando que el eje para colgar libremente.
- Retire el conjunto de tope de tope existente.
- Ensamble el resorte de goma y el acero Aeon. Disco como se muestra en el diagrama adyacente.
- Monte el conjunto Timbren utilizando el material suministrado sujetadores. Apriete los sujetadores hasta que queden ajustados.
- Bajar el vehículo.

Altura total: 4"

No exceda la carga nominal en el eje recomendada por el fabricante del vehículo. Compruebe que no haya interferencia entre el resorte AEON® y los otros componentes del vehículo. Bajo carga, el resorte AEON® se amplía en diámetro.

Ref	Part	Qty
1	A16137-003	2
2	A00515-65J30	2
3	F11508-350	2

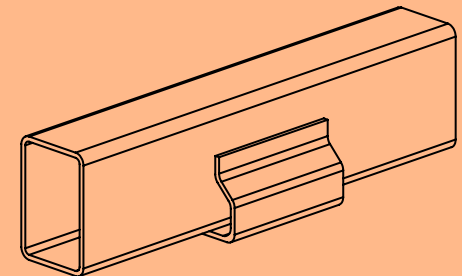

TIMBREN

Clearance Instructions

Front SES kits are usually in full contact.

Rear SES kits for Light Duty Trucks and Cube Vans should have 1/2" to 1-1/2" gap between rubber spring and contact point when empty.

Partial load, or vehicle accessories will reduce or eliminate gap.

Medium and Heavy-Duty Trucks, Trailers and Motorhomes will be in constant contact, and have no gap.

Lifetime Warranty

Timbren SES - Suspension Enhancement Systems kits are warranted against defects in material and workmanship, under normal use and service, for the life of the vehicle on which the kit was originally installed. The warranty is non-transferable and proof of the date of purchase and purchaser is required.

This warranty is limited to the replacement of the failed parts and does not include labor, freight, collateral damage or ancillary costs which may arise as a result of the failed part. For vehicles subjected to exceptionally high use and service, the warranty is limited to the lesser of 5 years (from date of purchase) or 400,000 km (approx. 250,000 miles).

Timbren retains the right to make its own inspection of the failed part to determine the validity of the claim. Timbren shall not be liable nor warrant the product in the event of alteration, misuse, overload, negligence nor damage caused by others

100 Day Money Back Guarantee

Timbren Industries offers a 100 Day Money Back Guarantee on all our SES and Active Off-Road Bumpstop products. If our product does not do what we claim it can do call our expert Customer Service Team. 1-800-263-3113 or email sales@timbren.com. Our team will do they're absolute best to resolve your issue and get you towing and hauling like the pros or your money back.

