


### 1 - Start at the entrance

Begin by laying tiles at either corner of the entrance. Leave a 5-10mm gap with the walls for normal expansion.

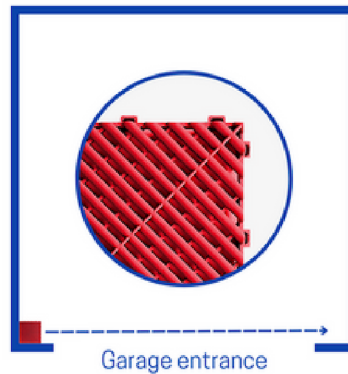


### 2 - Lay the first row

Ensure the female (looped) sides face away from the entrance and the wall as shown. Finish laying the first row.




### 3 - Add ramps

Attach your female (looped) ramps to the male (pegged) tile sides facing the outside of your space.

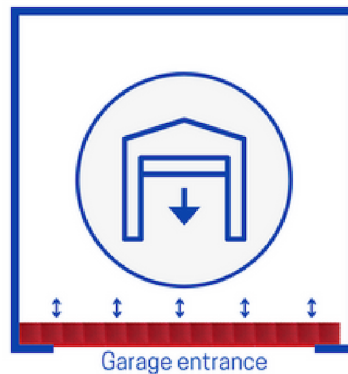


### 4 - Adjust against door

Move your first row of tiles and ramps to ensure a snug fit against the garage door when closed.

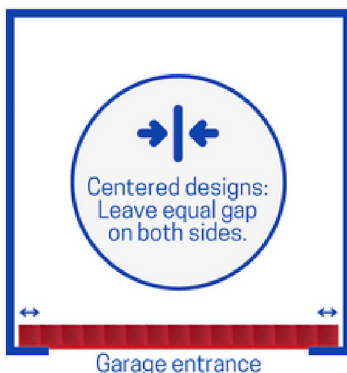

### 5 - Centered designs (optional)

If your design has a pattern which should be centered, adjust the first row of tiles to leave an equal gap on both sides.

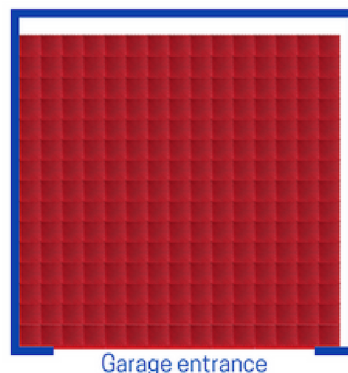

### 6 - Lay remaining tiles

Finish laying the remaining tiles to the back and opposite walls. Stop at the final rows which may require cutting for a perfect fit.



### 7 - Cut tiles (optional)

Use any cutting tool to cut and fit the final rows of tiles. We recommend using a good jigsaw with a fine-toothed blade.



### 8 - Enjoy your new floor

Your new floor is now complete. You can start using it immediately.

Need help? Email us at [info@tractionflooring.com.au](mailto:info@tractionflooring.com.au). We'll be glad to assist you.