


Topaz 2

CARPET TILES

VIEW ON WEBSITE



SCAN HERE ↑

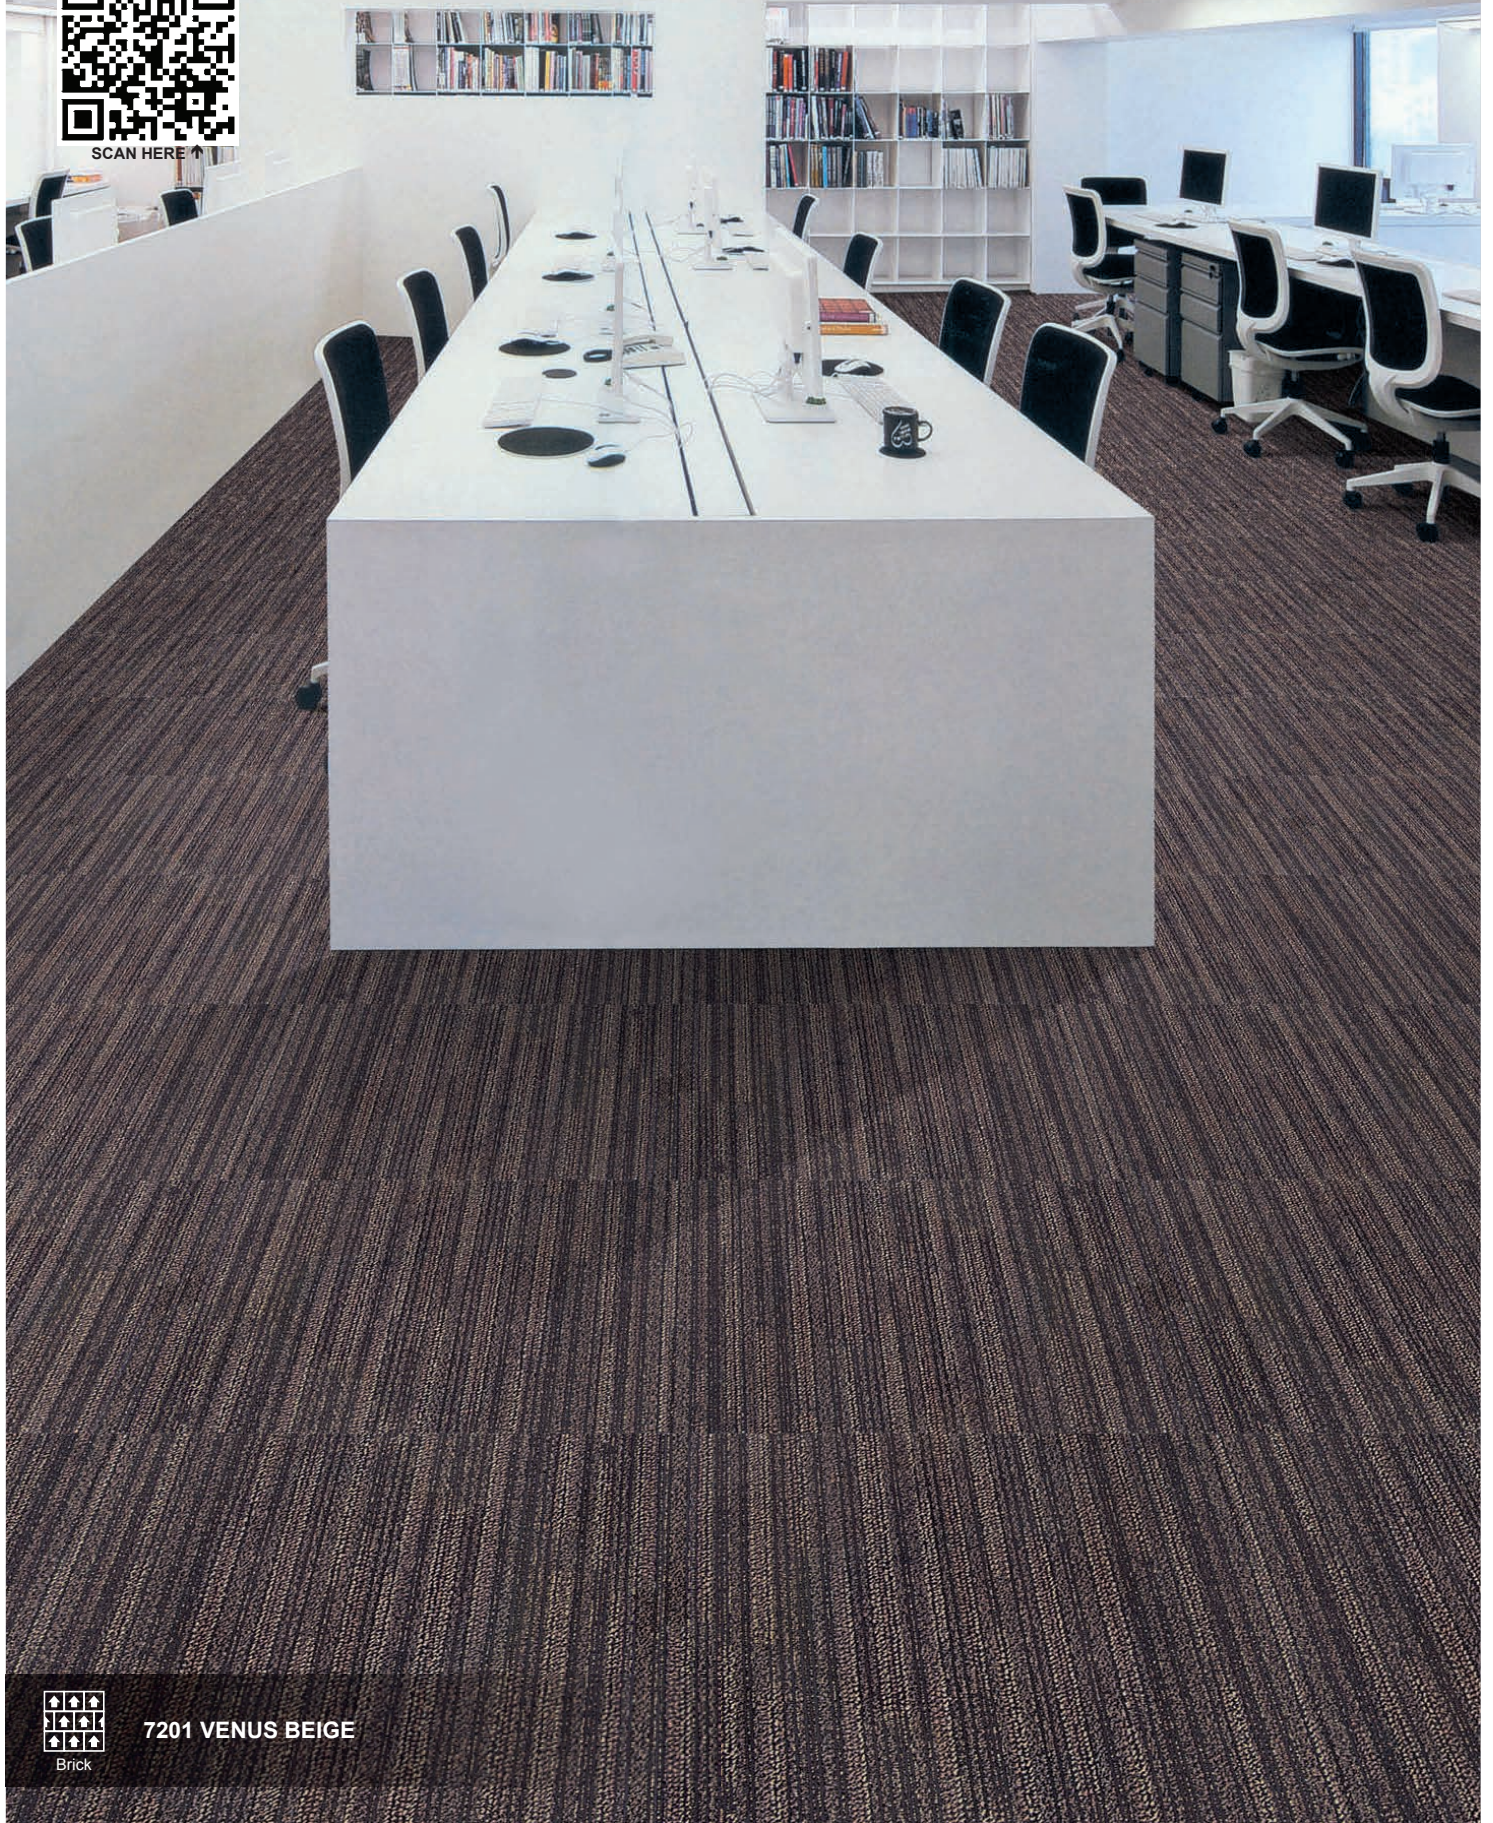

7201 VENUS BEIGE

Brick

Please note: There may be slight color difference between the picture and actual carpet. Slight color variation may occur from dye lot to dye lot.



***7201 VENUS BEIGE**
***Discontinued Design**



7202 SILVER MOON



***7205 VELVET MARS**
***Discontinued Design**

TOPAZ 2 Specifications

Construction	1/12" Multi-Level Loop Pattern
Yarn Composition	100% Solution Dyed Nylon
Tufted Pile Weight	Ca. 678 g/m ² (20 oz/yd ²) (+/- 10%)
Total Weight	Ca. 4080 g/m ² (120 oz/yd ²) (+/- 15%)
Pile Height	Ca. 4 mm (+/- 0.5 mm)
Total Height	Ca. 7 mm (+/- 0.5 mm)
Density (APYD)	4,572 ozs/yd ³
Tuft Density	186,000 stitches/m ²
Stitch Rate	10 per inch
Backing	EcoAce Backing
Tile Size	50 cm x 50 cm
Packing	20 pcs per box (5 m ²)

Performance

(as tested by ITTS Inc. USA)

Stain Resistance	9 (AATCC-175-2003)
Static Control	Pass - Max. 4 kV (AATCC 134-1996)
Tuft Bind	Pass - 6.8 lbs (ASTM-D-1335)
Dimensional Stability	Pass - Max. 2% change (AACHEN)
Indoor Air Quality (V.O.C.)	Pass - No VOC Detected (ASTM-D5116-10)
Impact Sound Insulation	ΔLw: 28 dB (ISO 10140)
Sound Absorption	αw = 0,25 (H) (ISO 354) Hz 125 250 500 1000 2000 4000 αs 0.00 0.05 0.30 0.20 0.20 0.25
Flammability	
- Radiant Panel	Pass - Class I (ASTM-E-648-06)
- Pill Test	Pass - 8 (ASTM-D-2859-96)
- Smoke Density	Pass - Max. 450 (ASTM-E-662-06)
Colourfastness	
- to light	Excellent - 5 (AATCC-16E)
- to wet & dry crocking	Excellent - 5 (AATCC-16S)
- to ozone	3 (AATCC-129)

Warranties

- 15 Year Carpet Wear Warranty
- Lifetime Anti-shock Carpet Warranty

Ideal for Heavy Commercial Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles. Due to dye lot variations, actual colour may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Environment

The design and production of Topaz 2 Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

As a responsible manufacturer and to minimize our carbon footprint, a majority of our excess production materials are recycled in-house resulting in a minimum of 10% recycled content in our tile backing. Topaz 2 Tile does not contain any PVC in its manufactured materials and packaging.

Topaz 2 Tile is an environmentally friendly "green" carpet.

Installation Method



Brick



Monolithic



Ashlar

