

VIEW ON WEBSITE



SCAN HERE ↑

TRUE DELIGHT

CARPET TILES

100% SOLUTION DYED NYLON



Elegance & Comfort in Modern Living

SPLASH OF COLORS

Elevating Every Step



2302 BLISSFUL BLUE
2314 GRACEFUL GREY



Ashlar

“

Ideal for Heavy Commercial Use in Offices,
Retail Outlets, Libraries, Reception Lobbies,
Hotels, Airports, Auditorium Halls, Corridors, etc

2301 YAPPY YELLOW 2307 GLOSSY GREEN 2315 GORGEOUS GREY

In Plank Size: 25 cm x 100cm



Ashlar & Monolithic







2314 GRACEFUL GREY

In Plank Size: 25 cm x 100cm



Ashlar

Scan QR code
to view on website



2313 RASPBERRY ROLL
2314 GRACEFUL GREY
2315 GORGEOUS GREY

In Plank Size: 25 cm x 100cm



Brick







In Plank Size: 25 cm x 100cm



Herringbone

2305 GENTLE GREEN
2308 PEACEFUL PEACH
2314 GRACEFUL GREY

Scan QR code
to view on website



In Plank Size: 25 cm x 100cm



Ashlar

2315 GORGEOUS GREY



Scan QR code
to view on website




TRUE DELIGHT

SWATCHES


In Plank size 25cm x 100cm

Plank pattern are packed randomly per box.

2301 YAPPY YELLOW

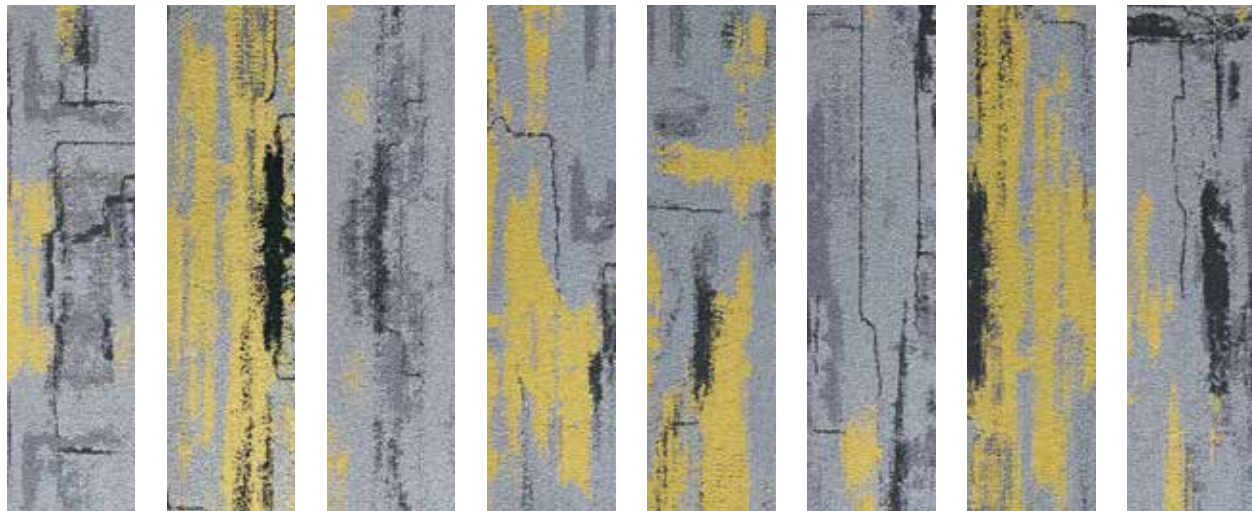


2302 BLISSFUL BLUE

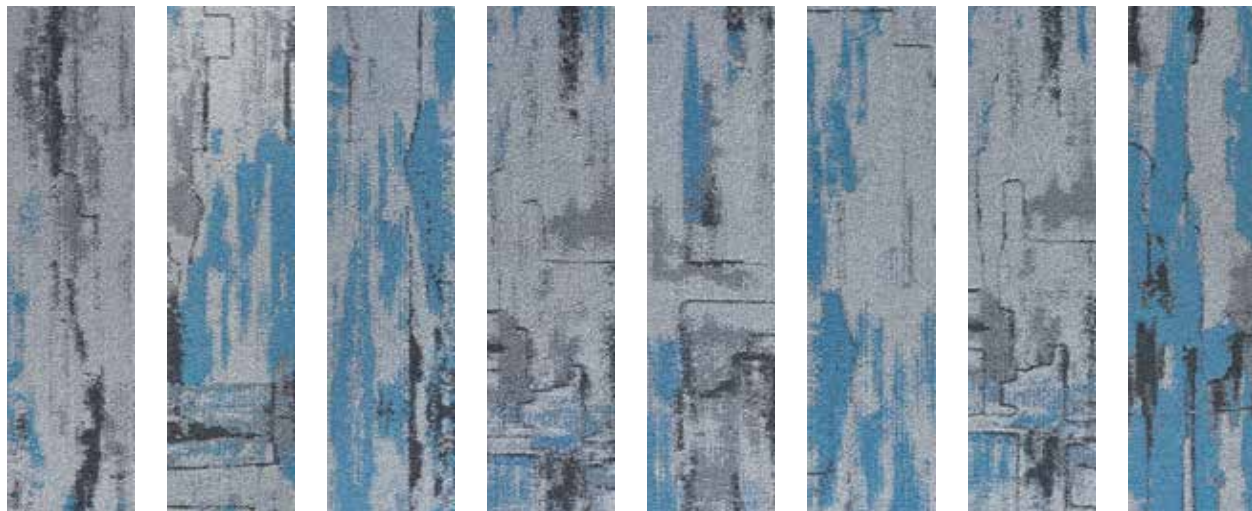


“

Made From 100% Solution-Dyed Nylon,
For Outstanding Durability And Colorfastness.


2305 GENTLE GREEN

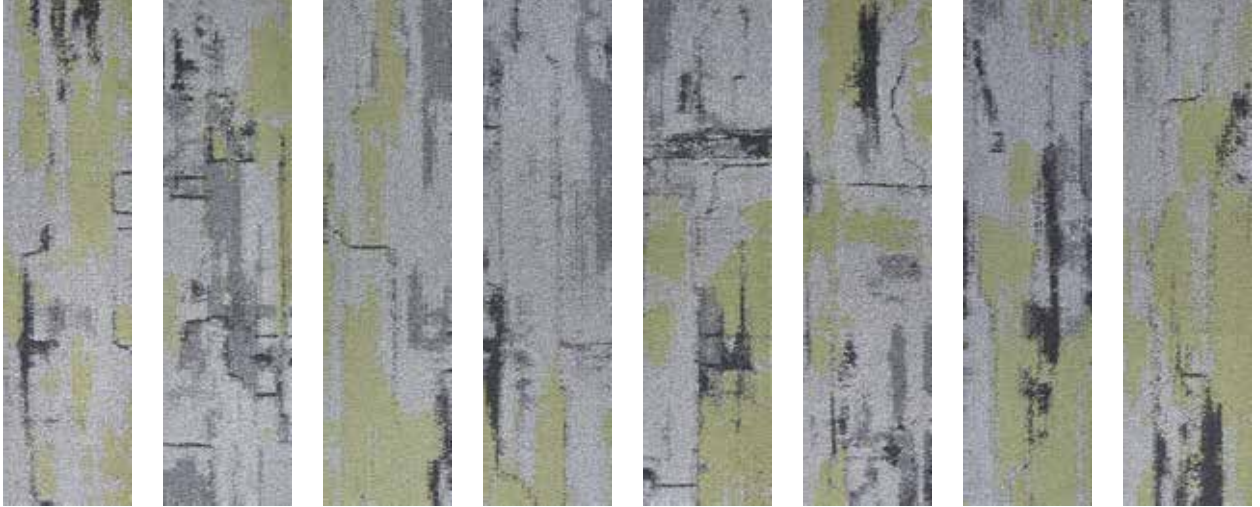

2307 GLOSSY GREEN

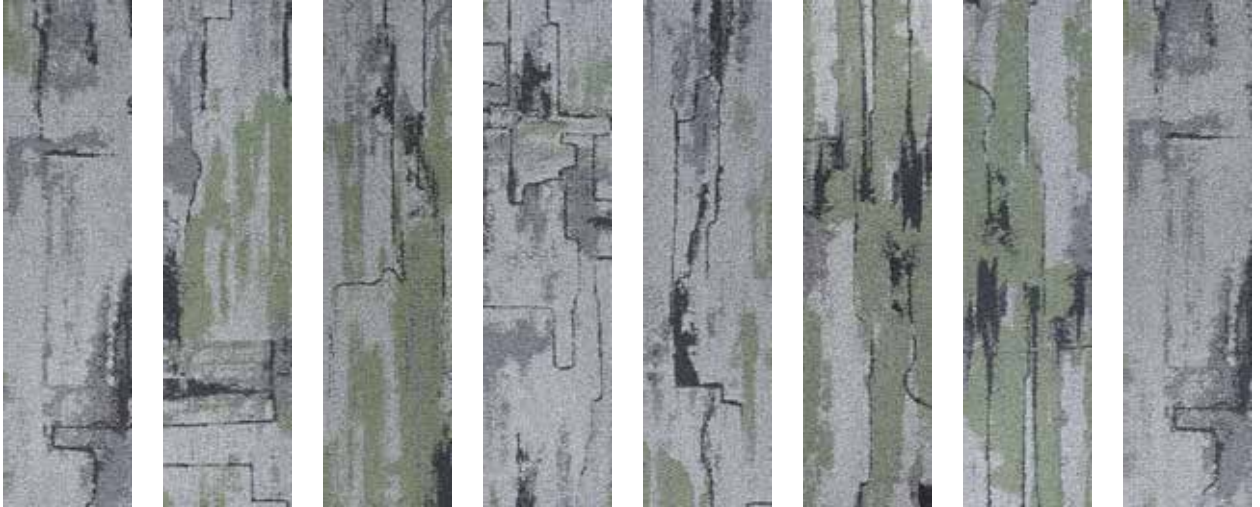


Scan QR code
to view on website



“

Engineered For Safety & Protection, Possessing Both Flame-Retardant & Anti-Static Properties.

2308 PEACEFUL PEACH

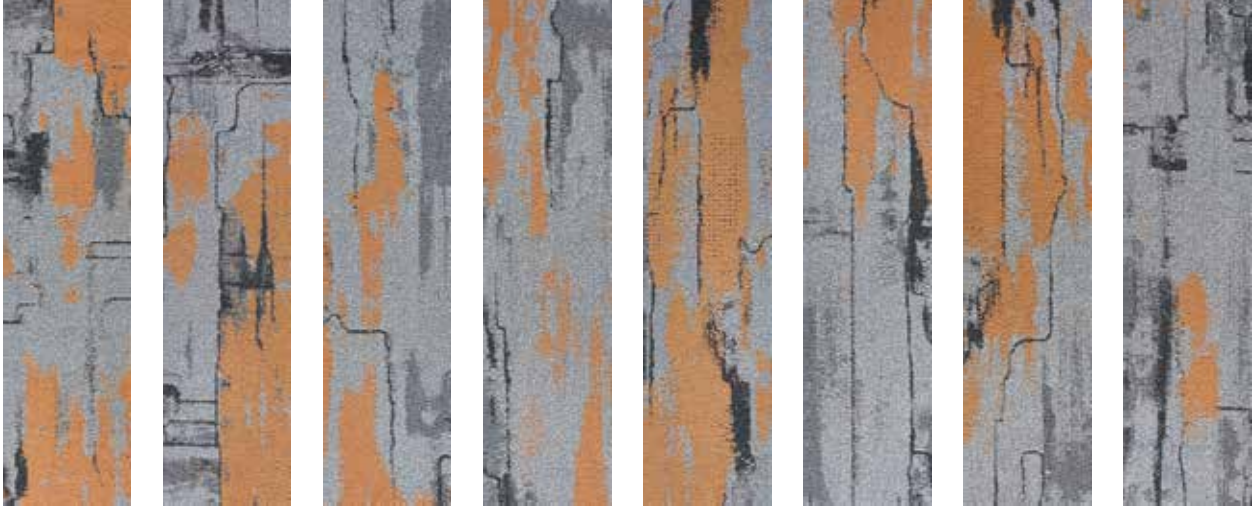

2313 RASPBERRY ROLL




TRUE DELIGHT

SWATCHES


In Plank size 25cm x 100cm

Plank pattern are packed randomly per box.

2314 GRACEFUL GREY

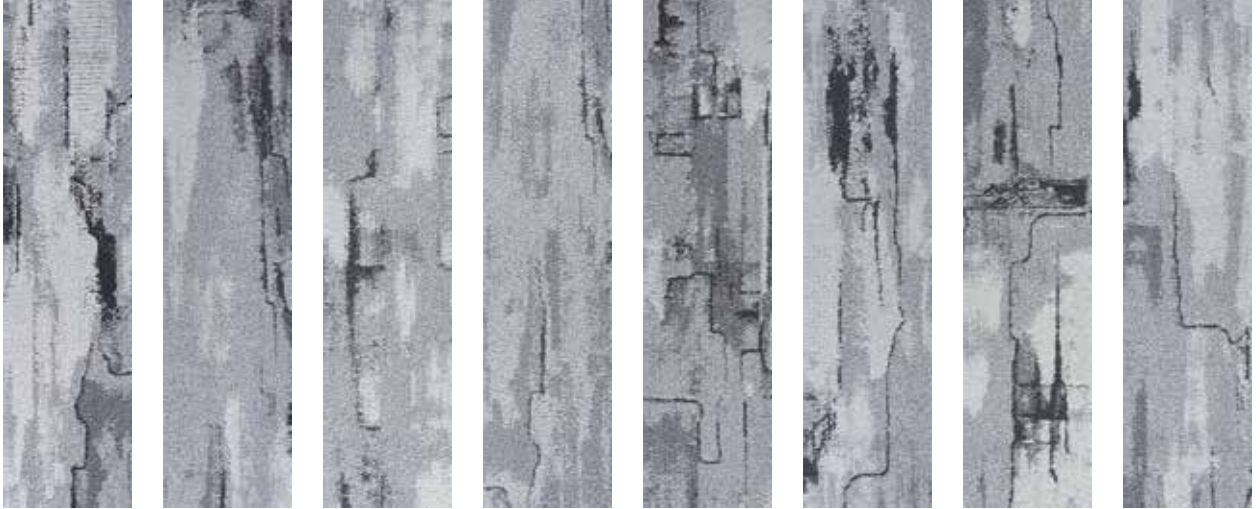

2315 GORGEOUS GREY

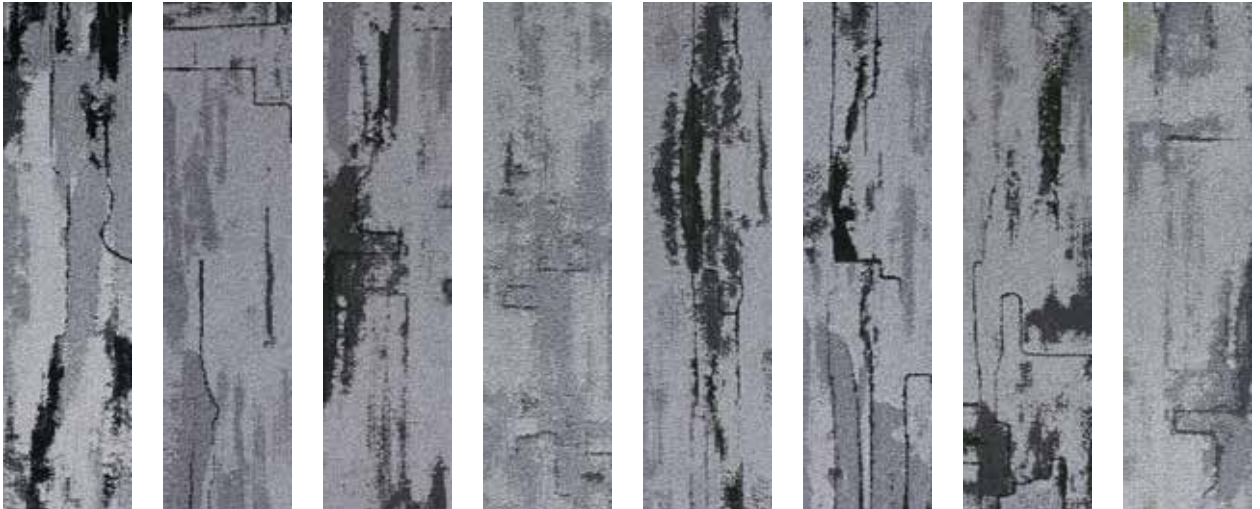

Scan QR code to view
Carpet Tiles Maintenance Guide





TRUE DELIGHT Specifications

Construction	1/10" ColorDot® Multi-Level Loop Pattern
Yarn Composition	100% Solution Dyed Nylon
Tufted Pile Weight	ca. 746 g/m ² (22 oz/yd ²) (+/- 10%)
Total Weight	ca. 4200 g/m ² (124 oz/yd ²) (+/- 10%)
Pile Height	ca. 4 mm (+/- 0.5 mm)
Total Height	ca. 8 mm (+/- 0.5 mm)
Density (APYD)	5,029 ozs/yd ³
Tuft Density	100,076 stitches/m ²
Stitch Rate	39.4 per 10 cm
Backing	EcoAce Polyolefin Cushion Bac Pro
Plank Size	25 cm x 100 cm
Packing	20 pcs per box (5 m ²)

Performance

(as tested by ITTS Inc. USA)

Stain Resistance	8 (AATCC-175-1993)
Static Control	Pass - Max. 4 kV (AATCC-134-1996)
Tuft Bind	Pass - 7.8 lbs (ASTM-D-1335)
Dimensional Stability	Pass - Max. 2% change (AACHEN)
Indoor Air Quality (V.O.C.)	Pass - No VOC Detected (ASTM-D5116-10)
Impact Sound Insulation	ΔLw = 31 dB
Sound Absorption	αw = 0.30 (H) Hz 125 250 500 1000 2000 4000 αs 0.04 0.06 0.43 0.23 0.30 0.42
Flammability	
- Radiant Panel	Pass - Class II (ASTM E 648-17)
- Pill Test	Pass - 8 (ASTM-D-2859)
- Smoke Density	Pass - Max. 450 (ASTM-E-662)
Colourfastness	
- to light	Excellent - 5 (AATCC-16E)
- to wet crocking	4 (AATCC-165)
- to dry crocking	3 (AATCC-165)
- to ozone	Excellent - 5 (AATCC-129)

Warranties

15 Year Carpet Wear Warranty
Lifetime Anti-shock Carpet Warranty
Ideal for Heavy Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles. Due to dye lot variations, actual colour may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.


Environment

The design and production of True Collection Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.


As a responsible manufacturer and to minimize our carbon footprint, a majority of our excess production materials are recycled in-house resulting in a minimum of 10% recycled content in our tile backing. True Collection Tile does not contain any PVC in its manufactured materials and packaging.

True Collection Tile is an environmentally friendly "green" carpet.

Installation Methods



Declare.



TRUEDELIGHT
CARPET TILE