



Electric **GRIDDLES**

Features

IKON electric griddle are designed to be reliable, efficient and accurate. Each 12 section has its own independent temperature Control providing even cooking of a variety of products at the same time.

- Operate on 208V/240V service , 50/60Hz Per 12 setion of griddle, 3kW at 208V; 4kW at 240V
- 1" Plate thickness
- Temperature controlled by snap action thermostats from 150°F (66°C) up to 450°F (232°C)
- One grease drawer on 12" 24" 36" models, two grease drawers on 48" models
- Hard wire to an appropriate electrical connection
- Stainless steel front and sides
- Supplied with 4"(102 mm) legs that are adjustable up to 1.375" (35 mm)
- Clearance, Side 1" back 1" with wall



ITG-12E



ITG-24E



ITG-36E




ITG-48E






Electric GRIDDLES

Dimensions in inches

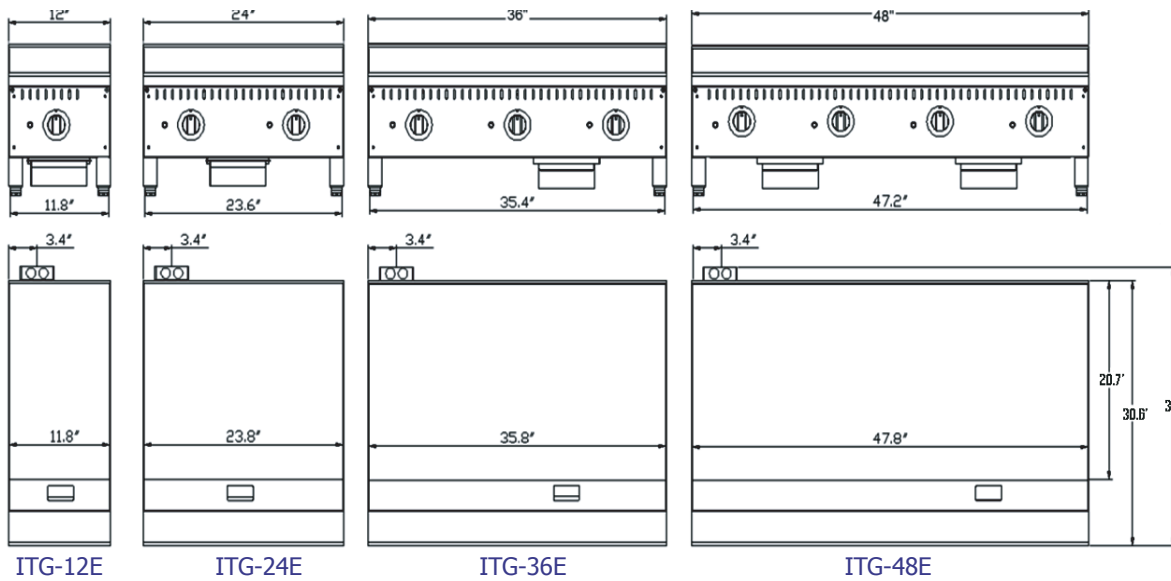

Specifications

Model	Voltage	KW	Overall Dimensions	Weight	Shipping Dimensions	Gross Weight
ITG-12E	208V/240V	3.0/4.0	12 L * 29 W * 15.7 H	104 LBS	16.3 L * 36 w * 19.3 H	125 LBS
ITG-24E	208V/240V	6.0/8.0	24 L * 29 W * 15.7 H	178 LBS	28.3 L * 36 w * 19.3 H	230 LBS
ITG-36E	208V/240V	9.0/12.0	36 L * 29 W * 15.7 H	253 LBS	40.6 L * 36 w * 19.3 H	335 LBS
IEG-48E	208V/240V	12.0/16.0	48 L * 29 W * 15.7 H	340 LBS	52.8 L * 36 w * 19.3 H	422 LBS

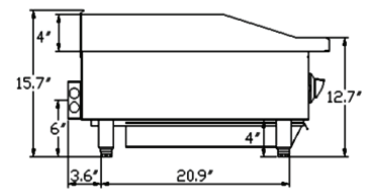

ALL ITG-E



Model Number	Phase	Voltage	Rated Wattage	Wire Connect	Nominal AMPS Per Line	For Supple Use Wire Size Shown or Larger
ITG-12E	Single phase dual supply	208 240	3000 4000	-	14.44 16.66	AWG #14 AWG#14
ITG-24E	Single phase dual supply	208 240	6000 8000	-	28.88 33	AWG #10 AWG#8
	Three phase dual supply	208 240	6000 8000	X Y Z X Y Z	14.44 25 14.4 16.7 28.9 16.7	AWG #16 AWG#12 AWG#16 AWG #14 AWG#10 AWG#14
ITG-24E	Single phase dual supply	208 240	9000 12000	X-Y X-Y	43 50	AWG #6 AWG#6
	Three phase dual supply	208 240	9000 12000	X Y Z X Y Z	25 25 25 28.9 28.9 28.9	AWG #12 AWG#10
ITG-48E	Three phase dual supply	208 240	8000 8000	X Y Z X Y Z	38.2 38.2 25 44.2 44.2 29	AWG #6 AWG#6 AWG#8 AWG #6 AWG#6 AWG#8