LX-10RB SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR



Slim single door merchandiser refrigerator energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, profesional technical service and unmatched warranty.



KEY FEATURES

• Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low global warming potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.

• Digital Temperature Display

Electronic controller assures optimal refrigeration performance through precision temperature control.

High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.

• Standard LED Lighting System

Ultra bright 250 LUX, low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.

• Spark-Free Refrigeration Components

All glass door merchandiser models have spark free refrigeration components for optimal safety, per UL requirements.

• Low Noise Refrigeration Unit

Rated under 65 Db

















LX-10RB SINGLE GLASS DOOR MERCHANDISER REFRIGERATOR




STANDARD FEATURES INCLUDE

- Integrated Kickplate + Lock
- Display

ACCESSORIES (OPTIONAL)

- Gravity Kit
 20 oz Bottle "Pack Out" Capacity: 100
- Extra Shelf
- Price Tag
- Door Decals*
- Side Decals*
- Whole Cabinet Decals*

*Minimun Qty required

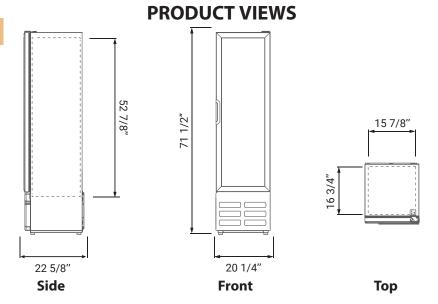

Exterior Dimensions	Usable Interior Capacity	Material
H: 71 1/2" (184 cm)	H: 45 1/2" (116 cm)	Flat Plastic Frame
W: 20 1/4" (51 cm)	W: 14 5/8" (37 cm)	Shelves 4
D: 22 5/8" (58 cm)	D: 14 1/8" (36 cm)	Shelf Size
Interior Dimensions	Usable Volume	W: 15 1/8" (38 cm)
H: 52 7/8" (135 cm)	7.6 Ft3 / 217.8 L	D: 14 5/8" (37 cm)
W: 15 7/8" (40 cm)	Doors	Exterior Material Pre-painted steel
D: 16 3/4" (42 cm)	1	Interior Material Pre-painted steel
REFRIGERATION PERFORMANCE	E ELECTRICAL	LOGISTICS
Refrigerant	Power Supply Plug Type	Trailer Loads
R600 / 1.34 oz (0.038 kg)	115V/60Hz NEMA 5-15P	53′: 100
Compressor Power	Amps	Unit Weight
1/10 HP	2.7	177.9 lb (80.7 kg)
Thermostat default setting	Controller	Shipping Weight
32°F (0°C) to 44.6°F (7°C)	ERC112	182.1 lb (82.6 kg)
Energy Consumption	Lighting	Shipping Dimensions
1.52 kWh/24h	2 modules, 48 LED per	H: 74 2/3" (190 cm)
Condenser	Cord Length	W: 20 6/7" (53 cm)
	128" (327 cm)	D: 23 5/8" (60 cm)

 $KOOL\text{-}IT\ SIGNATURE\ is\ a\ registered\ trademark\ of\ MVP\ Group.\ Specifications\ subject\ to\ change\ without\ notice.$





