LX-74RB

TRIPLE SWING GLASS DOOR MERCHANDISER REFRIGERATOR



Large Triple door merchandiser refrigerator, energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, profesional technical service and unmatched warranty.



KEY FEATURES

• Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low global warming potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.

• Digital Temperature Display

Electronic controller assures optimal refrigeration performance through precision temperature control.

• High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.

Standard LED Lighting System

Ultra bright 250 LUX, low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.

• Spark-Free Refrigeration Components

All glass door merchandiser models have spark free refrigeration components for optimal safety, per UL requirements.

• Low Noise Refrigeration Unit

Rated under 65 Db















LX-74RB

TRIPLE SWING GLASS DOOR MERCHANDISER REFRIGERATOR



STANDARD FEATURES INCLUDE


- Integrated Kickplate + Lock
- Display
- Casters

ACCESSORIES (OPTIONAL)

- Gravity Kit
 20 oz Bottle "Pack Out" Capacity: 840
- Extra Shelf
- Price Tag
- Door Decals*
- Side Decals*
- Whole Cabinet Decals*

*Minimun Qty required

PRODUCT VIEWS

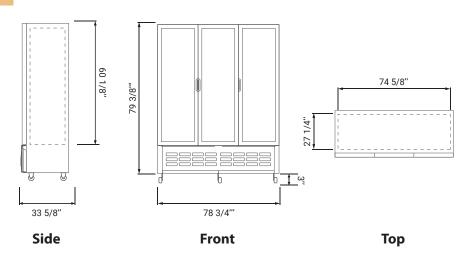

TECHNICAL SPECIFICATIONS		
Exterior Dimensions	Usable Interior Capacity	Material
H: 79 3/8" (202 cm) W/Caster: 82 3/8" (210 cm)	m) H: 52 5/8" (134 cm)	Flat Plastic Frame
W: 78 3/4" (200 cm)	W: 72 1/8" (183 cm)	Shelves 15
D: 33 5/8" (86 cm)	D: 21 5/8" (55 cm)	Shelf Size
Interior Dimensions	Usable Volume	W: 24 1/2" (62 cm)
H: 60 1/8" (152 cm)	66.3 Ft3 / 1878 L	D: 22 1/8" (56 cm)
W: 74 5/8" (190 cm)	Doors	Exterior Material Pre-painted stee
D: 27 1/4" (69 cm)	3	Interior Material Pre-painted steel
REFRIGERATION PERFORMANC	ELECTRICAL	LOGISTICS
Refrigerant	Power Supply Plug Type	Trailer Loads
R290 / 6.00 oz (0.17 kg)	115V/60Hz NEMA 5-15P	53': 18
Compressor Power	Amps	Unit Weight
1/2 HP	7.8	815 lb (370 kg)
Thermostat default setting	Controller	Shipping Weight
32°F (0°C) to 44.6°F (7°C)	CIR	828 lb (376 kg)
Energy Consumption	Lighting	Shipping Dimensions
6.082 kWh/24h	6 modules, 108 LED per	H: 82 3/4" (210 cm)
Condenser	Cord Length	W: 81 1/4" (206 cm)
Dynamic	128" (327 cm)	D: 33 3/4" (86 cm)

KOOL-IT SIGNATURE is a registered trademark of MVP Group. Specifications subject to change without notice.





