



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____

**COUNTERTOP MANUAL
GAS GRIDDLE - SRMG SERIES**
SRMG12 | SRMG15 | SRMG24 | SRMG36 | SRMG48



SRMG24

Sierra Series Countertop Manual Gas Griddle was developed to provide the best cooking experience, combining high standard of quality, performance and durability to satisfy all professional kitchens demands.

STANDARD FEATURES

- Available in 12" (305 mm), 15"(380 mm) 24" (610 mm), 36" (915 mm), and 48"(1,220 mm) width.
- Stainless steel front and sides.
- 12" Splash guards.
- 3/4" (19.05 mm) thick polished carbon steel working griddle plate.
- Fully welded griddle plate.
- Enameled burners placed every 12", providing uniformity when operating.
- Accessible pilots through front panel.
- Orange paint injected aluminum knobs providing for better toughness and durability.
- 1- year parts and labor warranty.
- 4" adjustable chromed carbon steel legs.
- Units are shipped ready for Natural Gas(NG). A Propane Gas(LP) conversion kit and NG/LP regulator is supplied with the unit.
- Easily removable stainless steel griddle grease trap.
- Griddle grease trap capacity:

COLLECTING GREASE TRAY CAPACITY	MODEL				
	SRMG12	SRMG15	SRMG24	SRMG36	SRMG48
	0.52 gal (2 L)	0.76 gal (2.9 L)	1.05 gal (4.6 L)	2.43 gal (9.2 L)	2.64 gal (10 L)

ACCESSORIES/OPTIONAL

- Pressure Regulator
- Propane Gas(LP)/Natural Gas(NG) conversion kits.



SRMG042222


3560 NW 56th Street
Fort Lauderdale, FL 33309

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax.: 786.661.4100

5659 Royalmount Avenue
Montreal, Qc, Canada H4P 2P9

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax.: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com



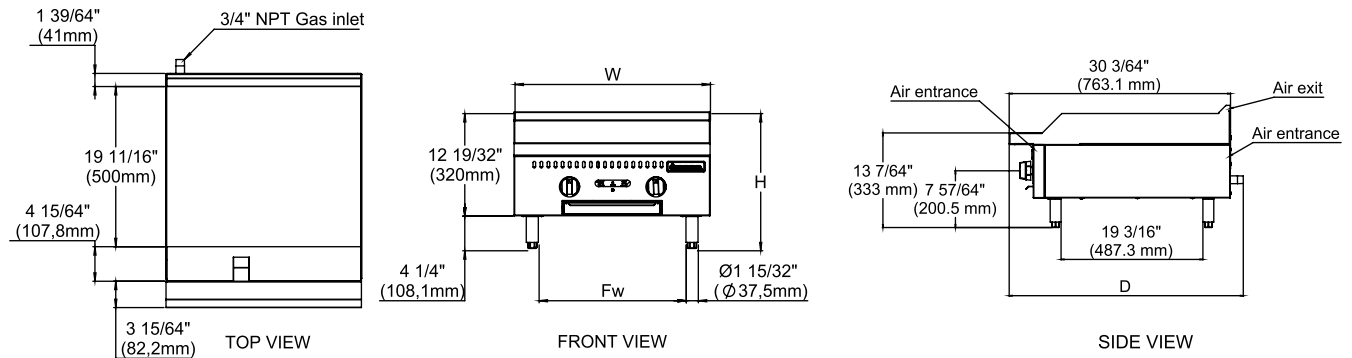

SPECIFICATIONS

Models	Exterior Product Dimensions & Weight					Shipping Crate Dimensions & Weight			
	Width (W)	Depth (D)	Height (H)	Fw	Weight	Width	Depth	Height	Weight
SRMG12	12" (305 mm)	32" (812.8 mm)	16 27/32" (428 mm)	9 5/64" (230.5 mm)	108 lb (49 kg)	18 29/32" (480 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	132 lb (60 kg)
SRMG15	15" (375 mm)	32" (812.8 mm)	16 27/32" (428 mm)	9 5/64" (230.5 mm)	117 lb (53 kg)	18 29/32" (480 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	139 lb (63 kg)
SRMG24	24" (610 mm)	32" (812.8 mm)	16 27/32" (428 mm)	18 3/32" (459.5 mm)	163 lb (74 kg)	27 61/64" (710 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	194 lb (88 kg)
SRMG36	36" (915 mm)	32" (812.8 mm)	16 27/32" (428 mm)	31 9/32" (794.5 mm)	227 lb (103 kg)	40 5/32" (1020 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	273 lb (124 kg)
SRMG48	48" (1220 mm)	32" (812.8 mm)	16 27/32" (428 mm)	43 9/32" (1099.5 mm)	315 lb (143 kg)	52 31/32" (1320 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	353 lb (160 kg)

UTILITY INFORMATION

GAS SUPPLY					
Models	Burners	Propane	Natural	Manifold Pressure	
		BTU/h	BTU/h	Natural Gas	Propane Gas
SRMG12	1	30,000	30,000	4" W.C.	10" W.C.
SRMG15	1	30,000	30,000		
SRMG24	2	60,000	60,000		
SRMG36	3	90,000	90,000		
SRMG48	4	120,000	120,000		

- 30,000 BTU/h burners placed every 12", providing best performance.
- Manifold pressure is 4" W.C (Natural Gas) or 10" W.C (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

* NOTE: In line with its policy to continually improve its product, Sierra Range reserves the right to change materials and specifications without notice.

INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 3/4" or larger. flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.