

Patriot Docks

Rectangular Float Mounting Instructions

The buoyancy rating for the 48" x 24" x 12" floats is 380lbs each. Three floats are recommended per 16' feet of dock.
Each float has a single screw plug that needs to be in place before installation.




Step 1:

Lay frame upside down and position floats at the ends of the frame. The float will be mounted along the 2' dimension.



Step 2:

Align the floats with the two mounting holes that are pre-drilled in the underside of the Patriot dock frame. Mark the other hole locations and pre-drill the 3/8" mounting holes.

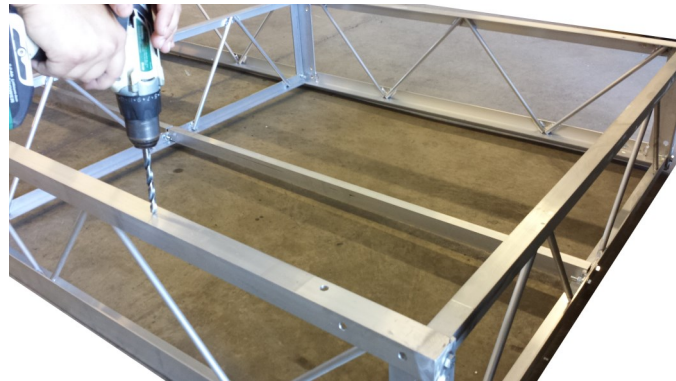

Step 3:

Use 3/8" x 2-1/2" mounting bolts with the fender washer, bolting through the mounting slot in the float and securing the float to the frame.

