

Time Delay 5x20mm Ceramic Fuse


Specification

Standards

Applicable standards for the series IEC060127.1, IEC060127.2, GB9634.1, GB9634.2

Agency	Certificate No.	Ampere
UR	E324232	100mA-16A
CCC	2011010207487490	1A/1.25A/1.6A/2A/2.5A/3.15A/4A/5A/6.3A
CQC	CQC11012061228	8A/10A/12.5A/16A
VDE	40034207	1A/1.25A/1.6A/2A/2.5A/3.15A/4A/5A/6.3A/8A/10A
VDE	40034206	12.5A/16A

Materials & Dimensions

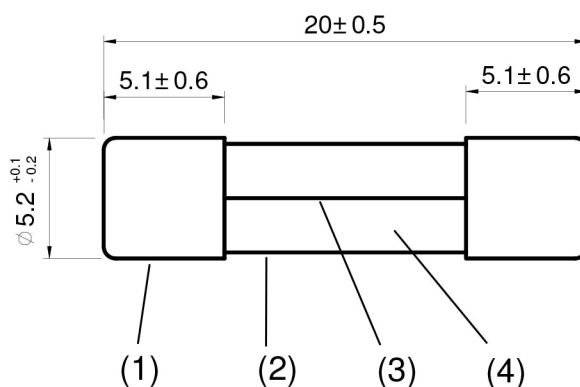

No.	Part	Material
1	Cap	Nickel Plated Brass
2	Tube	Ceramic Tube
3	Element	Metal Wire
4	Filler	Quartz Sand

Electrical Characteristics

Rated Current	2.1In	2.75In		4In		10In	
	Max	Min	Max	Min	Max	Min	Max
200mA-800mA	30min	250ms	80sec	50ms	5sec	5ms	15ms
1A-3.15A	30min	750ms	80sec	95ms	5sec	10ms	150ms
4-10A	30min	750ms	80sec	150ms	5sec	10ms	150ms
>10A	30min	750ms	80sec	150ms	5sec	10ms	150ms

Operating Temperature

-55°C to + 125°C