


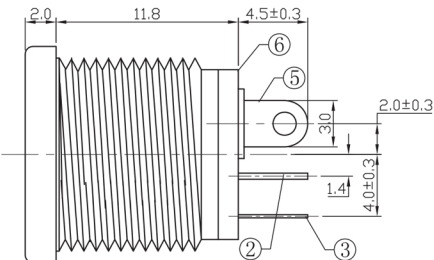


Specifications

Rating:	1A 30VDC
Contact Resistance:	30mΩ Max
Insulation Resistance:	50MΩ Min 500V DC
Withstand Voltage:	500VAC 1 minute
Housing Material:	PBT
Contact Material:	Nickel Plated Copper
Operating Temperature:	-30°C to +70°C



MODEL NO.	DC-022B
SCHEMATIC	
CENTER PIN	Ø 2.0mm Ø 2.5mm

6	COVER	1	PF	
5	CONTACT FOOT	1	BRASS	Sn-Plating
4	PIN	1	BRASS	Ni-Plating
3	SPRING	1	SUS301	Sn-Plating
2	FLAT PIECE	1	BRASS	Sn-Plating
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

Description	Ref Code
2.1mm x 5.5mm Panel Mount DC Power Socket DC-022	210009