

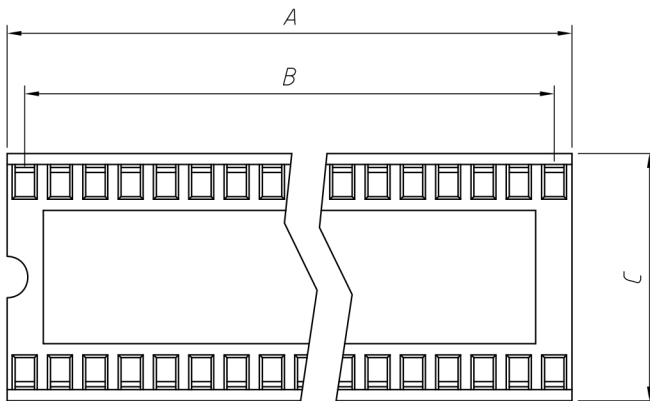
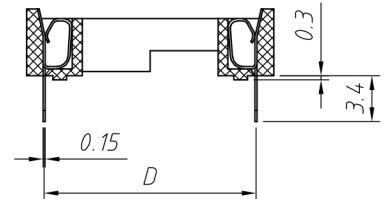


## Specifications

Current Rating:	1A
Contact Material:	Tin Plated Bronze
Housing Material:	PBT UL94V-0
Contact Resistance:	20mΩ Max
Insulation Resistance:	5000MΩ Min
Operating Temperature:	-40°C to +105°C

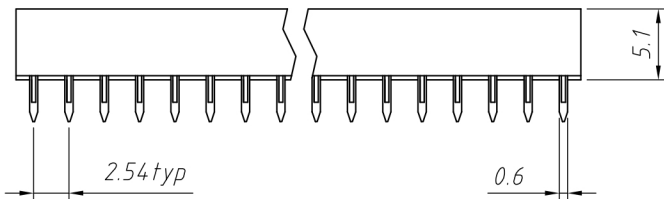

Position	A	B	C	D
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
32	40.54	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24
42	53.21	50.80	17.78	15.24
48	60.80	58.42	17.78	15.24



Description	Ref Code
24-Pin DIP IC Socket 7.62mm	222012