
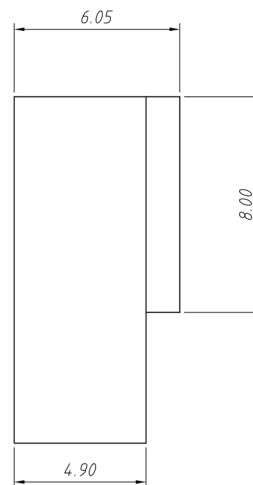
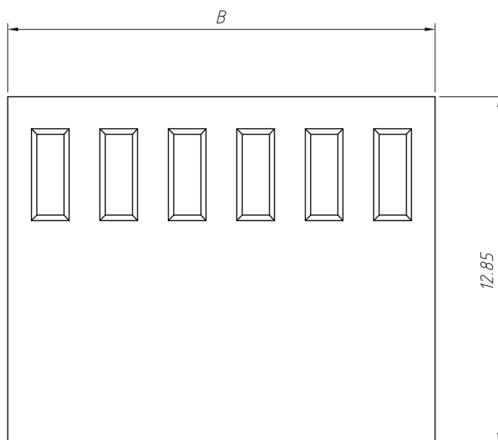



Specifications

Housing Material:	PA66 UL94V-0
Contact Resistance:	30mΩ Max
Insulation Resistance:	1000MΩ Min
Dielectric Strength:	1000VAC 1 Min
Wire Range:	22-28AWG
Operating Temperature:	-25°C to +85°C

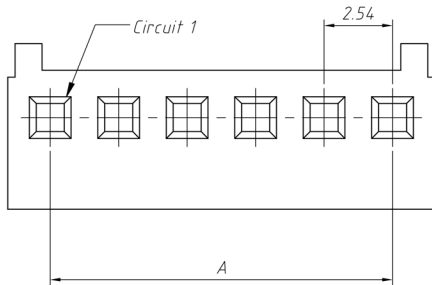

Pin	Dimensions (mm)	
	A	B
02	2.54	5.68
03	5.08	8.22
04	7.62	10.76
05	10.16	13.30
06	12.70	15.84
07	15.24	18.38
08	17.78	20.92
09	20.32	23.46
10	22.86	26.00
11	25.40	28.54
12	27.94	31.08
13	30.48	33.62
14	32.02	36.16
15	35.56	38.70
16	38.10	41.24
17	40.64	43.78
18	43.18	46.32
19	45.72	48.86
20	48.26	51.40