

Quick Acting 6x30mm Glass Fuse


Specification

Standards

Applicable standards for the series UL248-1, UL248-14

Agency	Rated Voltage	250V
UL	Approved Range	100mA-10A
	Cert No.	E324232
UR	Approved Range	12A-30A
	Cert No.	E324232

Materials & Dimensions

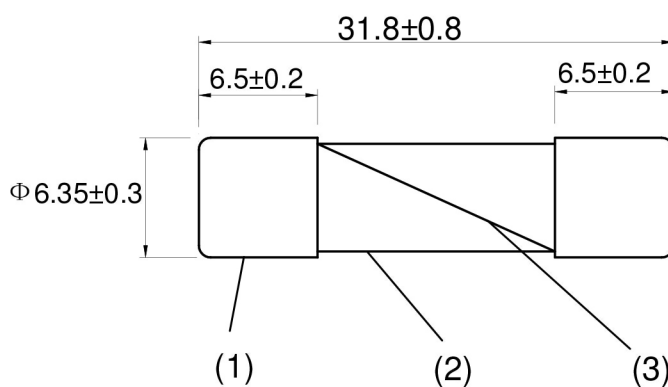

No.	Part	Material
1	Cap	Nickel Plated Brass
2	Tube	Glass Tube
3	Element	Metal Wire

Electrical Characteristics

% of Rated Current	Open Time
100%	4 Hours Max
135%	1 Hour Max
200%	5 sec Max

Operating Temperature

-55°C to + 125°C