


Specifications

| | |
|------------------------|------------------|
| Rating: | 15A 300V |
| Contact Resistance: | 20mΩ Max |
| Insulation Resistance: | 5000MΩ Min |
| Dielectric Strength: | 2000VAC 1 minute |
| Housing Material: | PA66 |
| Contact Material: | Phosphor Bronze |
| Wire Range: | 12-28AWG |
| Operating Temperature: | -40°C to +105°C |

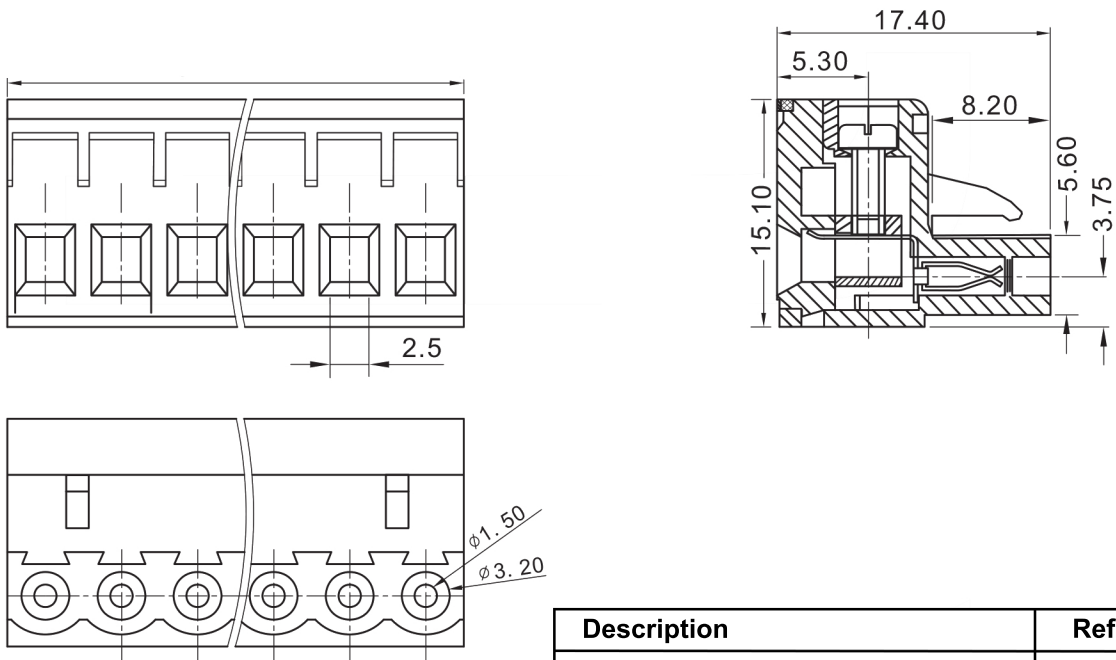

| Description | Ref Code |
|-----------------------------------------------|----------|
| 3-Way Plug-In PCB Screw Terminal Block 5.08mm | 329054 |