


Specifications

Rating:	15A 300V
Contact Resistance:	20mΩ Max
Insulation Resistance:	5000MΩ Min
Dielectric Strength:	2000VAC 1 minute
Housing Material:	PA66
Contact Material:	Phosphor Bronze
Wire Range:	12-28AWG
Operating Temperature:	-40°C to +105°C

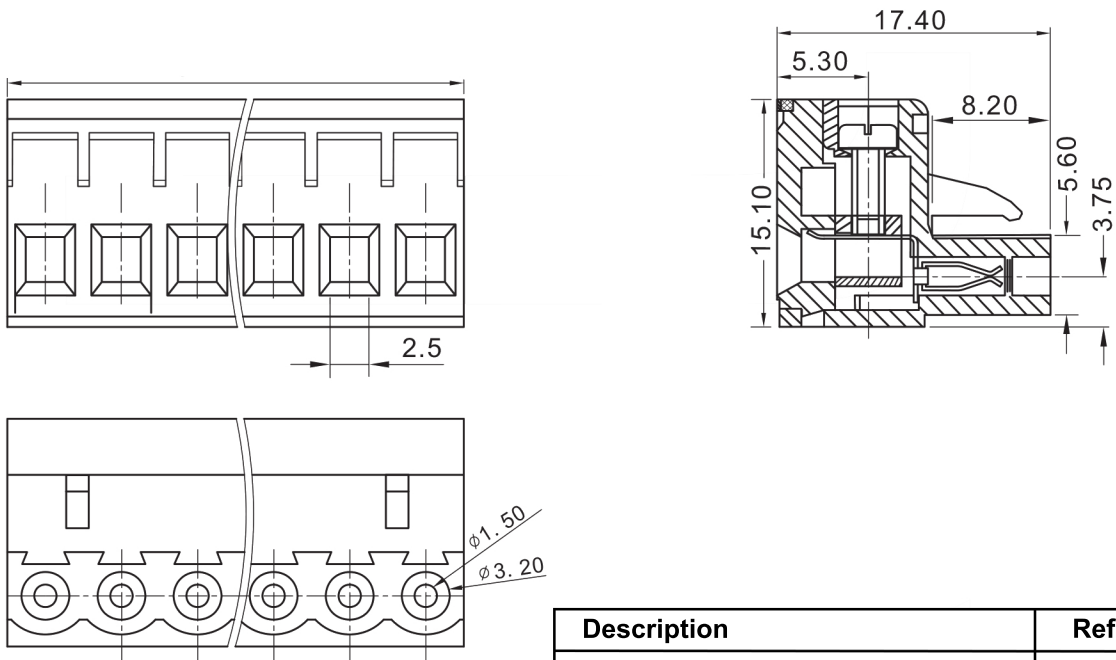

Description	Ref Code
4-Way Plug-In PCB Screw Terminal Block 5.08mm	329055