

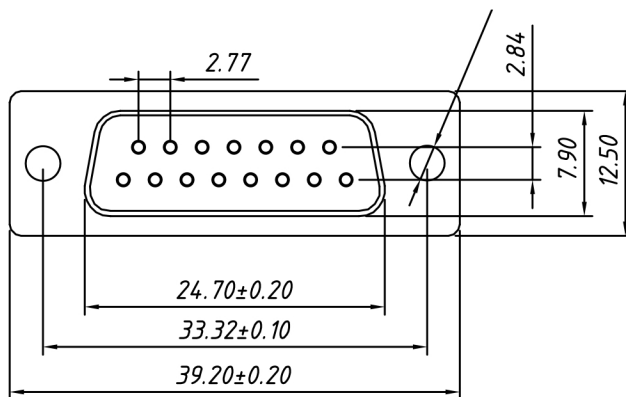


Specifications

Current Rating:	5A
Housing Material:	PBT + 30% Glass Filled, UL94V-0
Contact Material:	Gold Plated Brass
Shell Material:	Nickel Plated Steel
Contact Resistance:	20mΩ Max
Insulation Resistance:	1000MΩ Min
Dielectric Strength:	500VAC 1 Min
Operating Temperature:	-55°C to +105°C

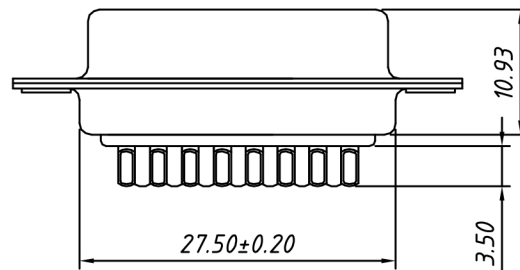

Description	Ref Code
15-Way D Connector Socket Solder Lug	356031