


## Specifications

Rated Voltage:	5VDC
Operating Voltage	4-8VDC
Max Rated Current:	30mA
Resonant Frequency:	3100Hz
Sound Output:	85dB @ 10cm
Operating Temperature:	-20°C to +85°C

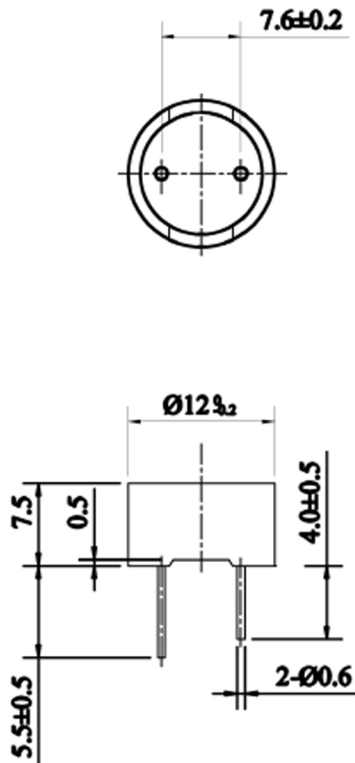

Description	Ref Code
5V Subminiature Low Profile Electromagnetic PCB Buzzer	481814