

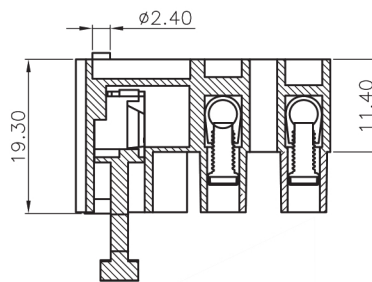


## Specifications

Rating:	10A 250V
Contact Resistance:	20mΩ Max
Insulation Resistance:	5000MΩ Min
Dielectric Strength:	2500VAC 1 minute
Housing Material:	PA66
Contact Material:	Nickel Plated Brass
Wire Range:	18-12AWG
Operating Temperature:	-40°C to +105°C

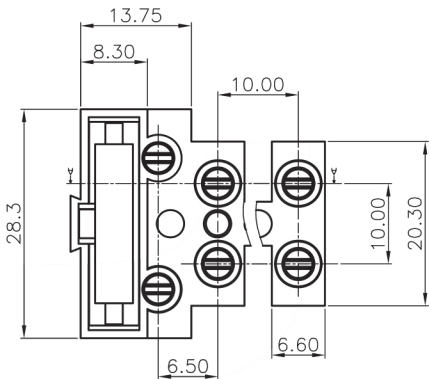

SECTION A-A



Description	Ref Code
5-Pole Fused Terminal Block 10A	481881