


Specifications

Rating:	10.0VA
Contact Type:	1C
Pull In Value:	40-80AT
Drop Out Value:	≥ 15 AT
Contact Resistance:	≤ 200 m Ω
Insulation Resistance:	≥ 100 M Ω
Maximum Switching Voltage:	100VDC
Maximum Switching Current:	0.5A
Maximum Carry Current:	2A
Operate Time:	≤ 1.5 mS
Bounce Time:	≤ 1 mS
Release Time:	≤ 0.5 mS
Operating Temperature:	-10°C to +70°C

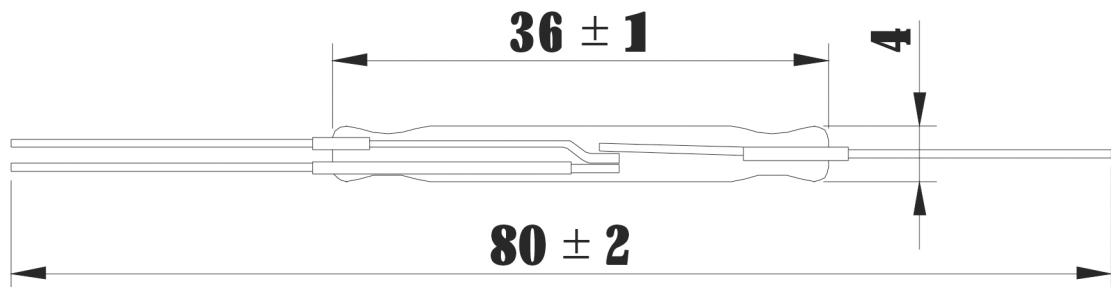

Description	Ref Code
SPDT Reed Switch 0.5A 100VDC	482568