


Specifications

Rating:	20.0VA
Contact Type:	1A
Pull In Value:	80-130AT
Drop Out Value	≥25AT
Contact Resistance:	≤200mΩ
Insulation Resistance:	≥100MΩ
Maximum Switching Voltage:	100VDC
Maximum Switching Current:	1A
Maximum Carry Current:	3A
Operate Time:	≤ 1.2mS
Bounce Time:	≤ 1mS
Release Time:	≤ 0.5mS
Operating Temperature:	-10°C to +70°C

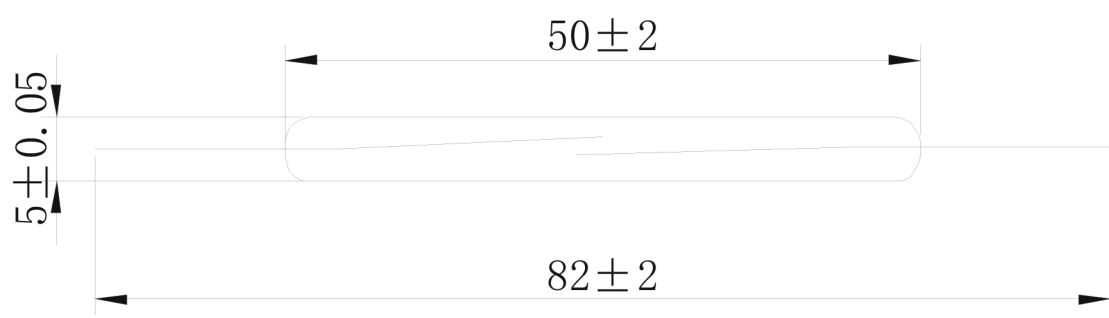

Description	Ref Code
SPST-NO Reed Switch 1A 100VDC	482572