
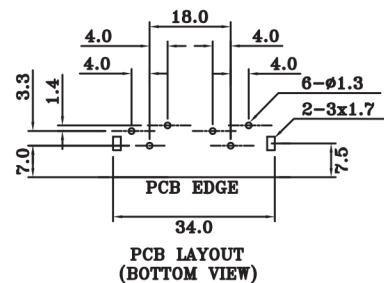
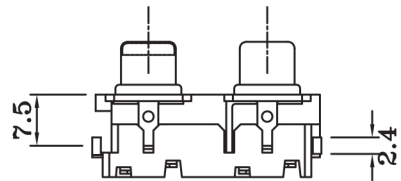
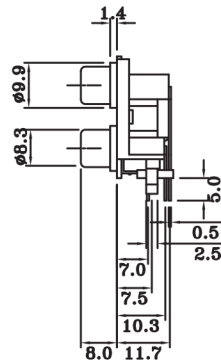




## Specifications

Contact Resistance:	30mΩ Max
Insulation Resistance:	50MΩ Min 500V DC
Withstand Voltage:	500VAC 1 minute
Housing Material:	PBT UL94V-0
Contact Material:	Brass
Operating Temperature:	-25°C to +85°C



MODEL NO.	RCA-402	
SCHEMATIC	TOP	BOTTOM
		

Description	Ref Code
Red / White Quad RCA PCB Phono Socket	483033