
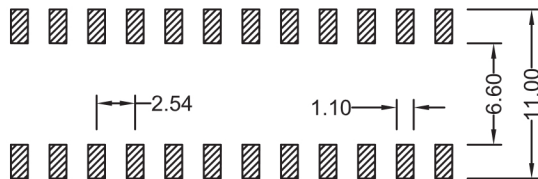
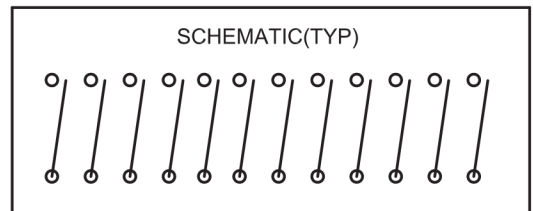



Specifications

| | |
|------------------------|--|
| Rating: | 25mA 24VDC (switching), 100mA 50VDC (steady state) |
| Contact Resistance: | 100mΩ Max |
| Insulation Resistance: | 100MΩ Min |
| Dielectric Strength: | 300VAC |
| Operating Temperature: | -40°C to +85°C |
| Electrical Life: | 1000+ Cycles |
| Operating Force: | 8N Max |

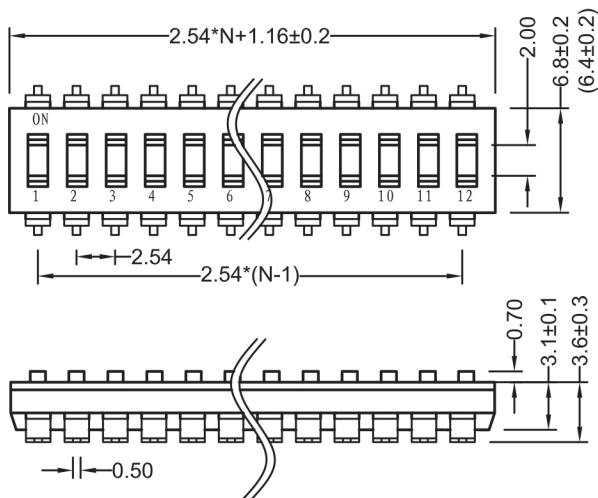

| Description | Ref Code |
|-----------------------------|----------|
| 2 Way SMD DIL Switch 2.54mm | 483050 |