

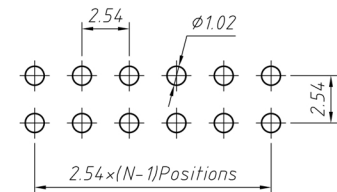
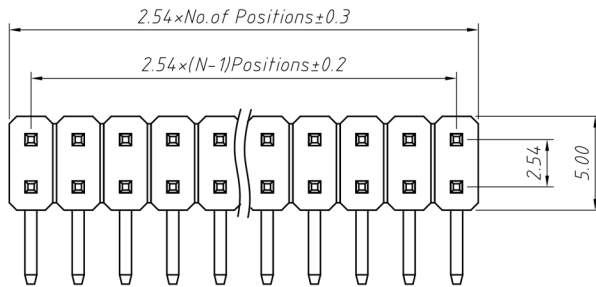


Specifications

Current Rating:	3A
Contact Material:	Brass
Housing Material:	PA6T UL94V-0
Contact Resistance:	20mΩ Max
Insulation Resistance:	1000MΩ Min
Dielectric Strength:	1000VAC
Operating Temperature:	-40°C to +105°C

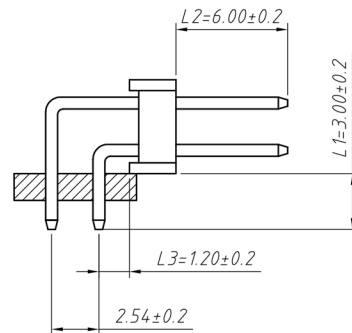

Recommended P.C.B Hole Layout

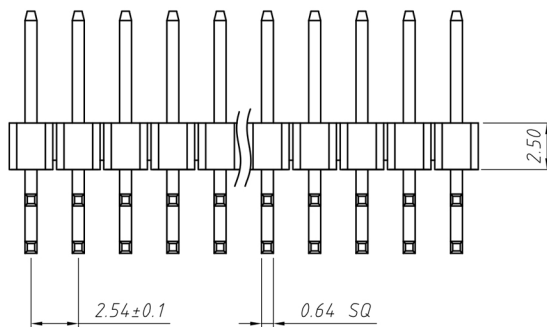

Description	Ref Code
8-Way Double Row Right Angle Male Header 2.54mm	483061