

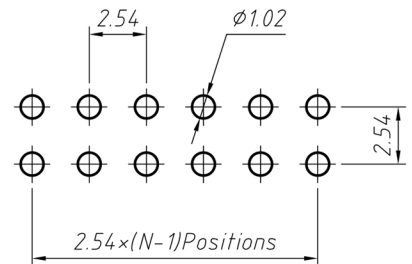
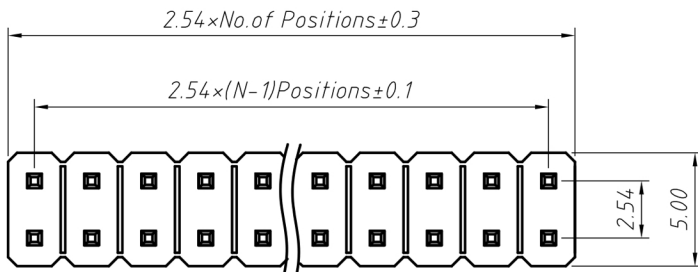


## Specifications

Current Rating:	3A
Contact Material:	Gold Plated Brass
Housing Material:	PA6T UL94V-0
Contact Resistance:	20mΩ Max
Insulation Resistance:	1000MΩ Min
Operating Temperature:	-40°C to +105°C

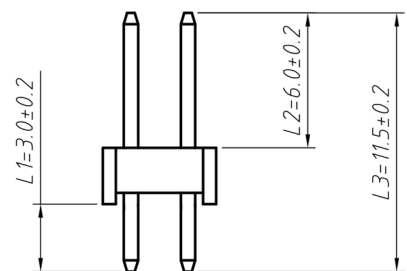

*Recommended P.C.B Hole Layout*

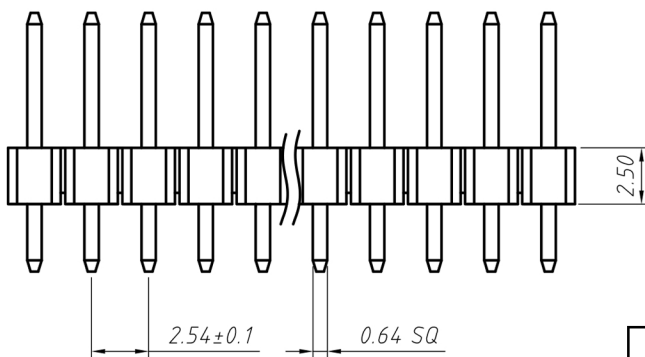

Description	Ref Code
80 Way Double Row Male Header 2.54mm	483094