


Specifications

Current Rating:	3A
Contact Material:	Tin Plated Bronze
Housing Material:	PPS UL94V-0
Contact Resistance:	20mΩ Max
Insulation Resistance:	1000MΩ Min
Withstand Voltage:	1000VAC
Operating Temperature:	-40°C to +105°C

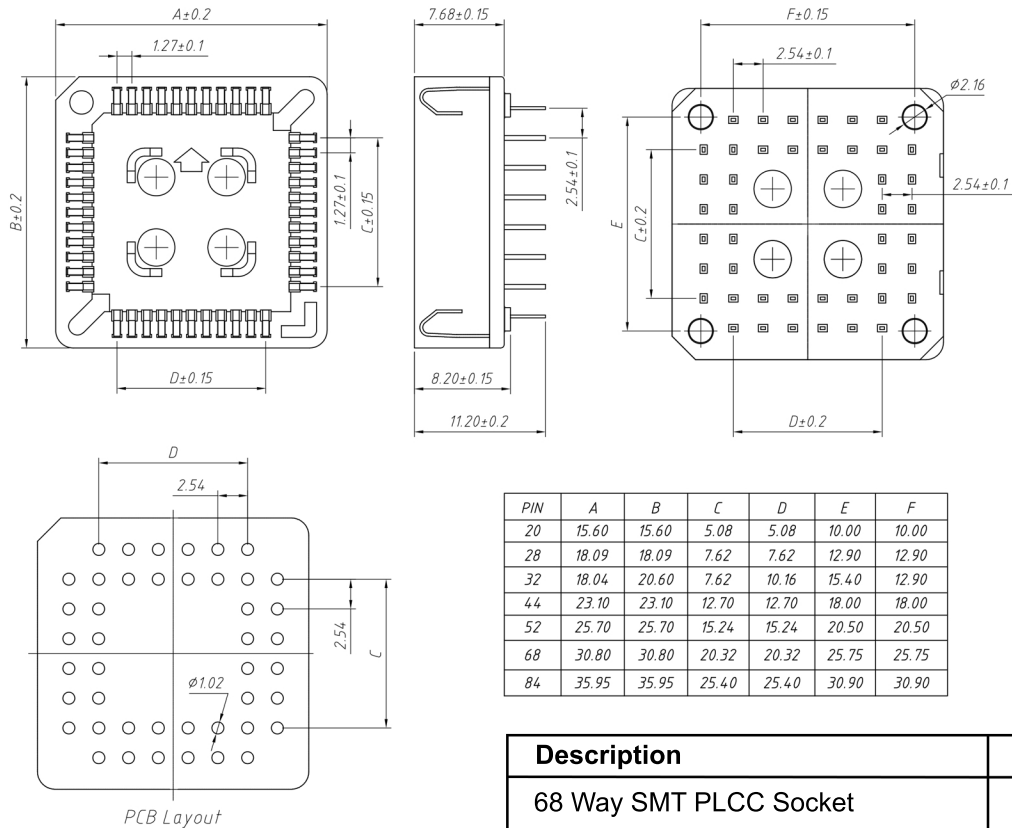

PIN	A	B	C	D	E	F
20	15.60	15.60	5.08	5.08	10.00	10.00
28	18.09	18.09	7.62	7.62	12.90	12.90
32	18.04	20.60	7.62	10.16	15.40	12.90
44	23.10	23.10	12.70	12.70	18.00	18.00
52	25.70	25.70	15.24	15.24	20.50	20.50
68	30.80	30.80	20.32	20.32	25.75	25.75
84	35.95	35.95	25.40	25.40	30.90	30.90

Description	Ref Code
68 Way SMT PLCC Socket	483097