

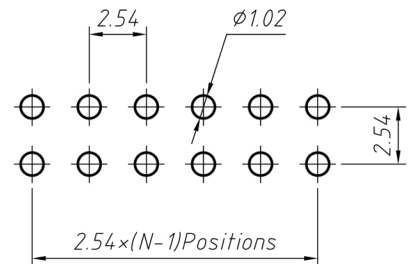
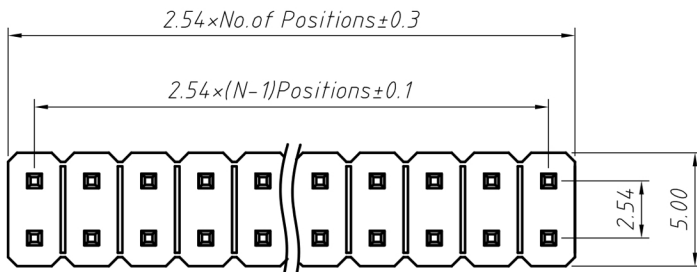


Specifications

| | |
|------------------------|-------------------|
| Current Rating: | 3A |
| Contact Material: | Gold Plated Brass |
| Housing Material: | PA6T UL94V-0 |
| Contact Resistance: | 20mΩ Max |
| Insulation Resistance: | 1000MΩ Min |
| Operating Temperature: | -40°C to +105°C |

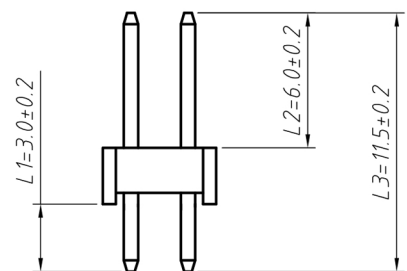

Recommended P.C.B Hole Layout

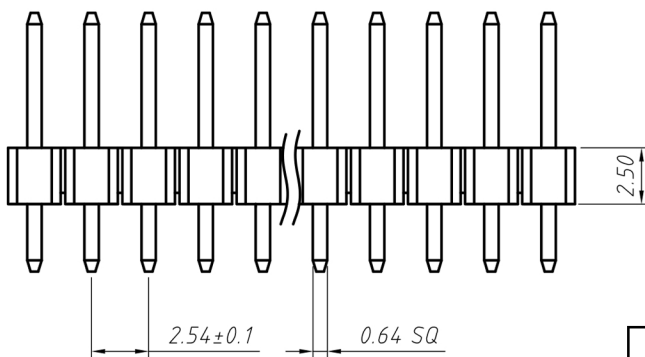

| Description | Ref Code |
|---|----------|
| 36 Way Double Row Male Header 2.54mm | 485144 |