





Specifications

Current Rating:	1A
Housing Material:	30% Glass Filled PBT UL94V-0
Contact Material:	Gold Plated Bronze
Contact Resistance:	30mΩ Max
Insulation Resistance:	1000MΩ Min
Dielectric Strength:	500VAC 1 Min
Operating Temperature:	-55°C to +105°C

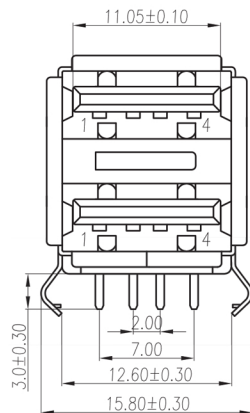

RECOMMENDED PCB LAYOUT

Description	Ref Code
Dual USB 2.0 Connector Type A Angled Socket PCB	550370