

Specifications

Rating:	20A 300V
Contact Resistance:	20mΩ Max
Insulation Resistance:	5000MΩ Min
Dielectric Strength:	1500VAC 1 minute
Housing Material:	PA66 UL94V-0
Contact Material:	Tin Plated Brass
Wire Range:	16-26AWG
Operating Temperature:	-40°C to +105°C




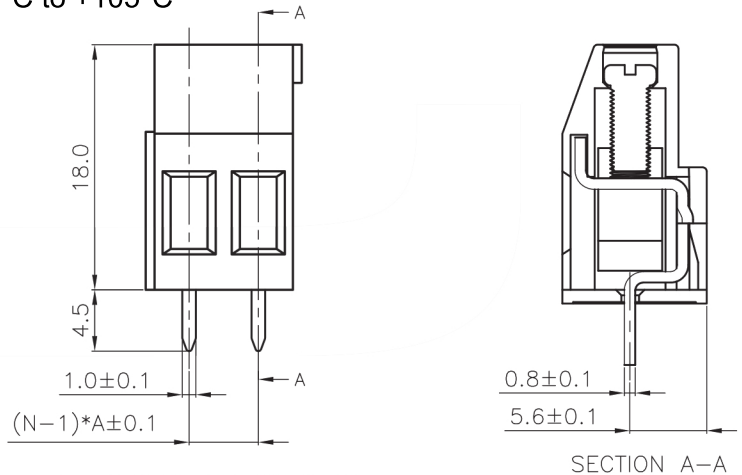


TABLE A

TYPE	Dimension
	A
1	5.00
2	5.08
3	7.62

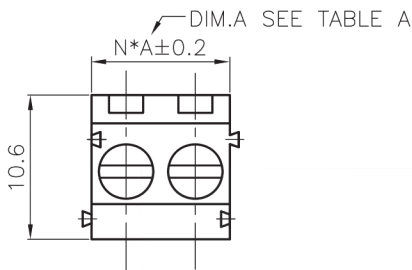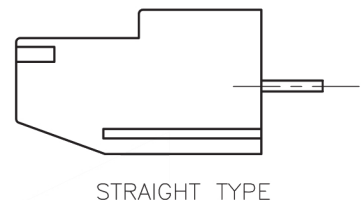

Description	Ref Code
3 Way PCB Terminal Block Connector 5.08mm 20A	550391