


## Specifications

Current Rating:	3A
Contact Material:	Tin Plated Bronze
Housing Material:	PPS UL94V-0
Contact Resistance:	20mΩ Max
Insulation Resistance:	1000MΩ Min
Withstand Voltage:	1000VAC
Operating Temperature:	-40°C to +105°C

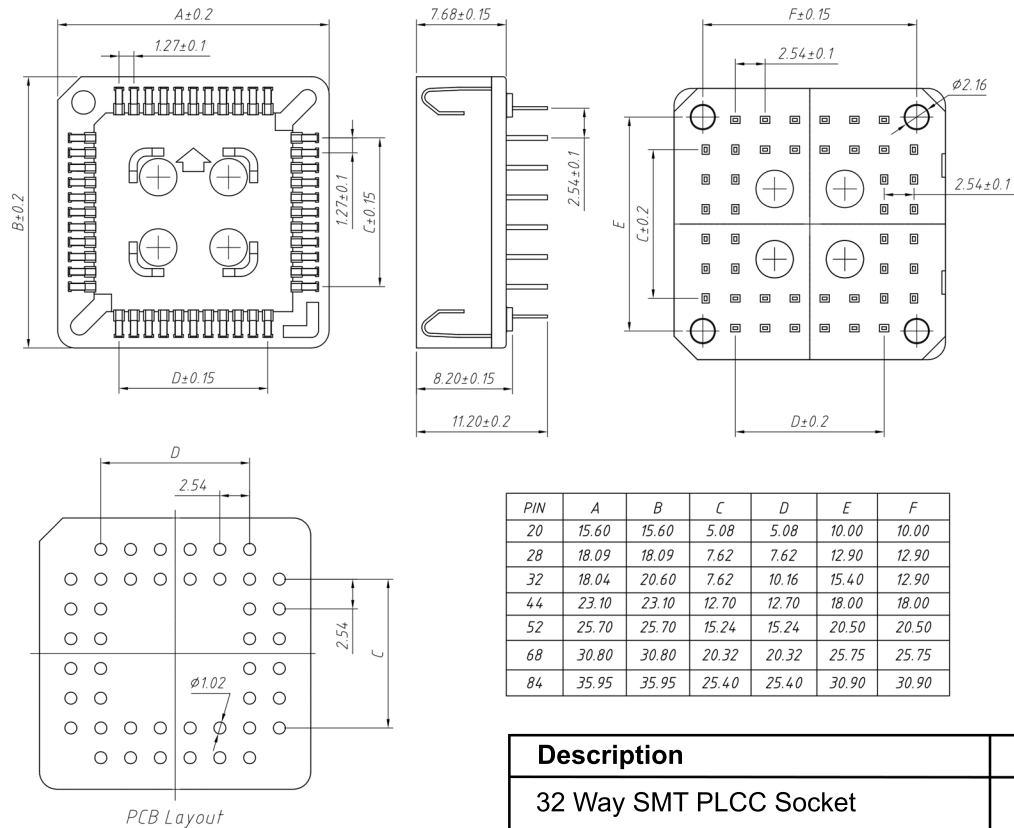

Description	Ref Code
32 Way SMT PLCC Socket	550933