Multipole Connectors



Specifications


Rating: 3A


Contact Resistance: $20m\Omega$ Max Insulation Resistance: $1000M\Omega$ Min


Housing Material: 30% Glass Filled PPS UL94V-0

Contact Material: Gold Plated Brass

Operating Temperature: -40°C to +105°C

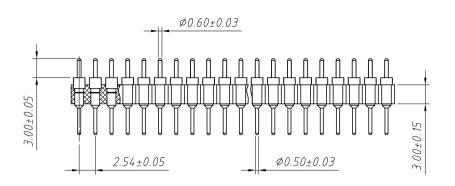



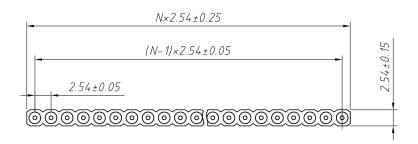

Description	Ref Code
32 Way 2.54mm Turned Pin Single In Line SIL Header	550952

