
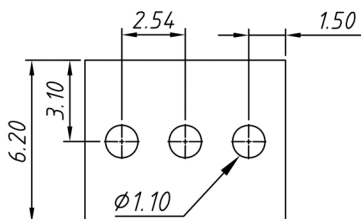

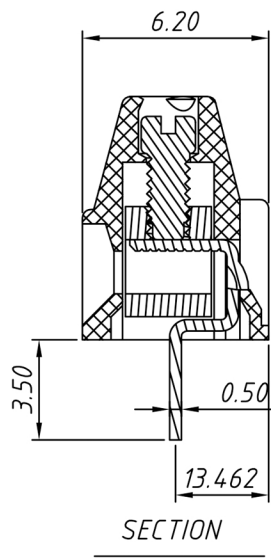


Specifications

Rating:	6A 125V
Contact Resistance:	20mΩ Max
Insulation Resistance:	500MΩ Min
Dielectric Strength:	1250VAC 1 minute
Housing Material:	PA66 UL94V-0
Contact Material:	Tin Plated Brass
Wire Range:	18-28AWG
Operating Temperature:	-40°C to +105°C

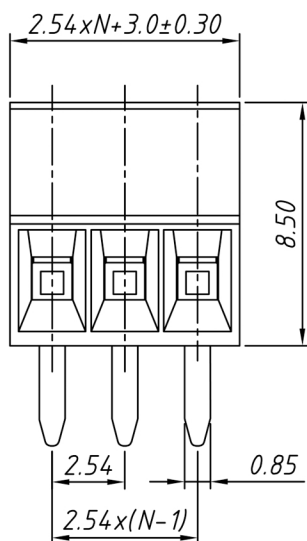

Description	Ref Code
2-Way Terminal Block 2.54mm Pitch 6A	551779