

Technical Information:

Debox SL



OVERVIEW

The all-in-one compliant in-line junction box. Save time & money with Debox... Installs in as little as 20 seconds!

Debox is a range of innovative junction boxes designed to save you both time and money on every installation. Debox SL can be assembled in less than 20 seconds without compromising quality. Each Debox is supplied with a 4-pole connector block. Featuring everything you need immediately to hand, not only does Debox reduce time on-site, it also offers greater flexibility. Debox can accommodate 2, 3 & 4 conductors in round or flat profile cable for ring main lighting, LED lighting or power.

Debox is a registered design.

DIMENSIONS

28.5mm (H) x 50mm (W) x 97mm (L)



FEATURES

SAVE TIME & MONEY

100% TOOL-LESS BOX ASSEMBLY

SUPPLIED WITH 16A 4-POLE TERMINAL BLOCK

FLAME RETARDANT UL94V-0 HOUSING

EN60670-22 (PULL TEST)


EN60598-1 (GLOW WIRE TEST 650°C)

COMPLETE WITH LOCKING CLIP

PRE-CUT LEAD IN CABLE ENTRY

MAINTENANCE FREE

FEATURES

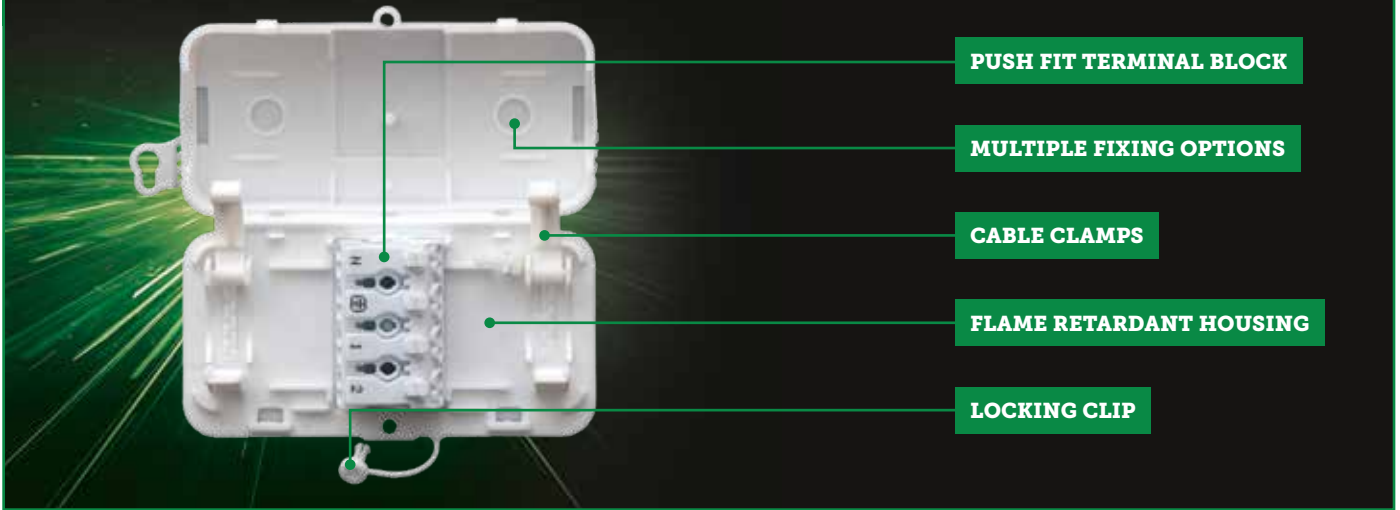

Debox SL

| Product Code | Colour | H (mm) | W (mm) | L (mm) | Pole | Terminal Block | | Max Conductor Size (mm ²) | | Maximum Current (A) | Temp Rating |
|--------------|--------|--------|--------|--------|--------|----------------|-----------------|---------------------------------------|-----|---------------------|---------------|
| | | | | | | Body Material | Insert Material | Min | Max | | |
| DEKSB-003 | White | 28.5 | 48 | 97 | 4-pole | Polypropylene | Steel | 0.5 | 2.5 | 18 | 20°C to +85°C |

ALSO AVAILABLE

Debox S

As part of the Debox in-line junction box range, we also have the Debox S. Manufactured with identical housing, the Debox S is supplied with a 24A UL/VDE approved 4-pole terminal block.

Debox S

| Product Code | Colour | H (mm) | W (mm) | L (mm) | Pole | Terminal Block | | Max Conductor Size (mm ²) | Maximum Current (A) | Temp Rating |
|--------------|--------|--------|--------|--------|--------|----------------|-----------------|---------------------------------------|---------------------|---------------|
| | | | | | | Body Material | Insert Material | | | |
| DEKSB-002 | White | 28.5 | 48 | 97 | 4-pole | Polypropylene | Steel | 4 | 24 | 20°C to +85°C |

