


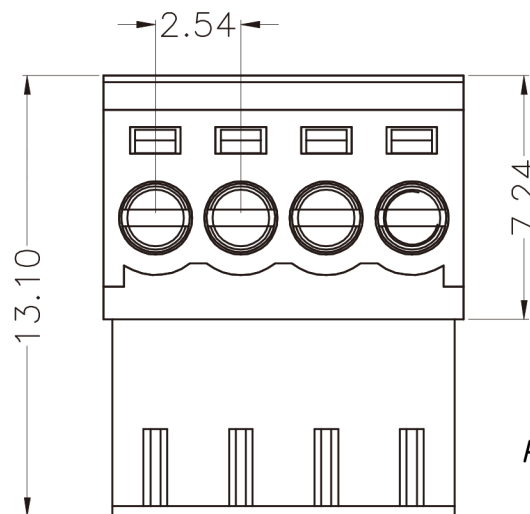

RE - C-EDK-2.54 Pluggable Terminal Block 2.54mm Pitch

Electrical :

Rated voltage: 125V

Rated current:4A

Contact resistance: 20mΩ

Insulator Resistance:5000MΩ/1000V

Withstanding Voltage: AC1250V/1Min


Wire range:28-20 AWG 0.5MM2

Temp. Range:-40°C~+105°C

Material:

Housing: PA66, UL94V-0

Pin header: Phosphor bronze, Zinc Plated

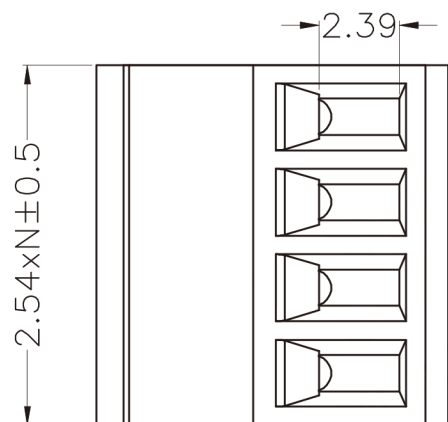

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		



First angle projection

TERMINAL BLOCK