
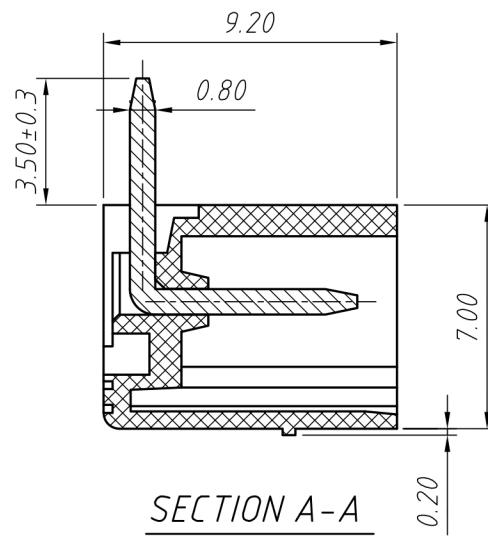


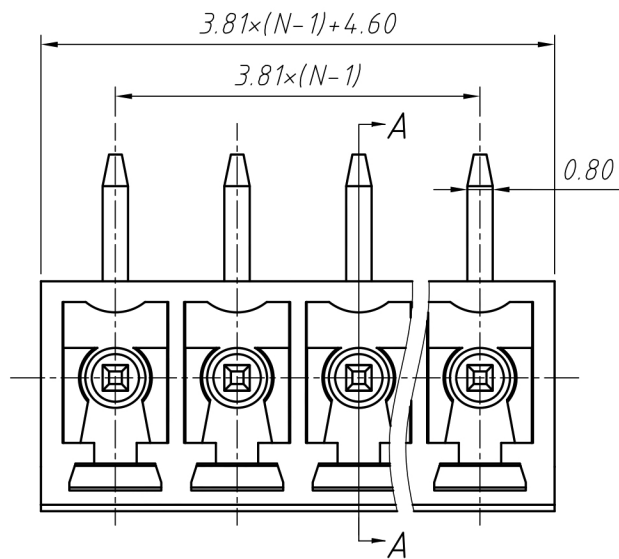

Material

Housing:

PA66, UL 94 V-0

Pin header:

Brass, Tin plated

Electrical

Rated voltage:

300V

Rated current:

8A

Contact Resistance:

20 m Ω

Insulation resistance:

500MΩ/DC500V



Withstand voltage:

AC2000V / 1 min

Mechanical

Temp. Range:

-40 °C ~ + 105 °C

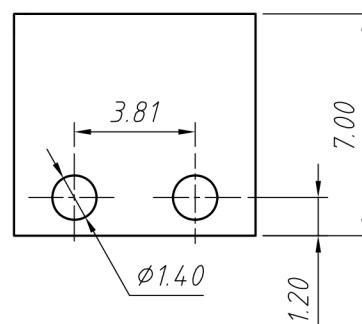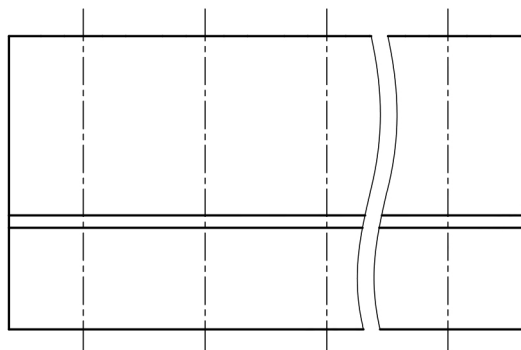

UNITS : mm

SHEET SIZE : A4

SCALE : ---

 First angle projection

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK