

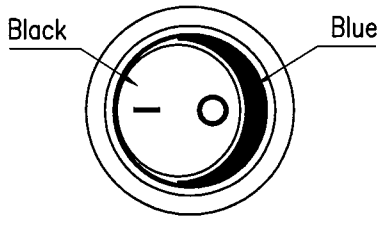

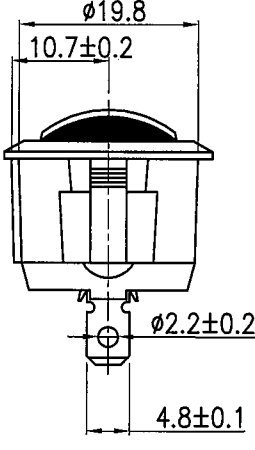


Rating	16A 125VAC, 10A 250VAC	Mounting Hole
	10A 125VAC, 6A 250VAC CQC	
	10(4)A 250V~ 25T85	
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C~85°C	
Switch Function	2P SPST ON-OFF	

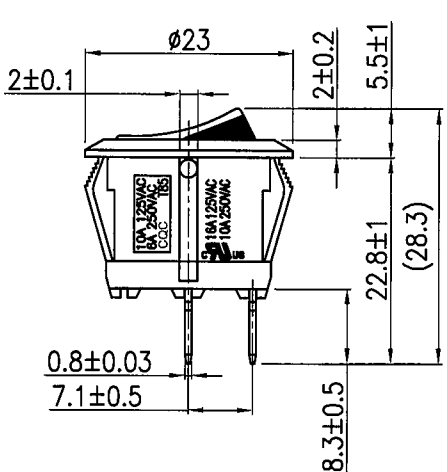

Material:
 Frame: Black, Nylon 66
 Actuator: Black/Blue, Nylon 66
 Terminals: Silver plated, Copper Alloy
 Hot stamping: White ,0 -



1 · Tolerances Unless Otherwise Specified ±0.3

Date		Name		Description				No.	
Drawn	Checked	Approved	SCI BOM No.	1826557	Model Name	ROCKER SWITCH			
林玥呈			Customer No.		Model No.	R13-112A2-02	Rev.		
9/26/17		9/26/17	Unit	mm	Shin Chin Industrial Co., Ltd.				0