



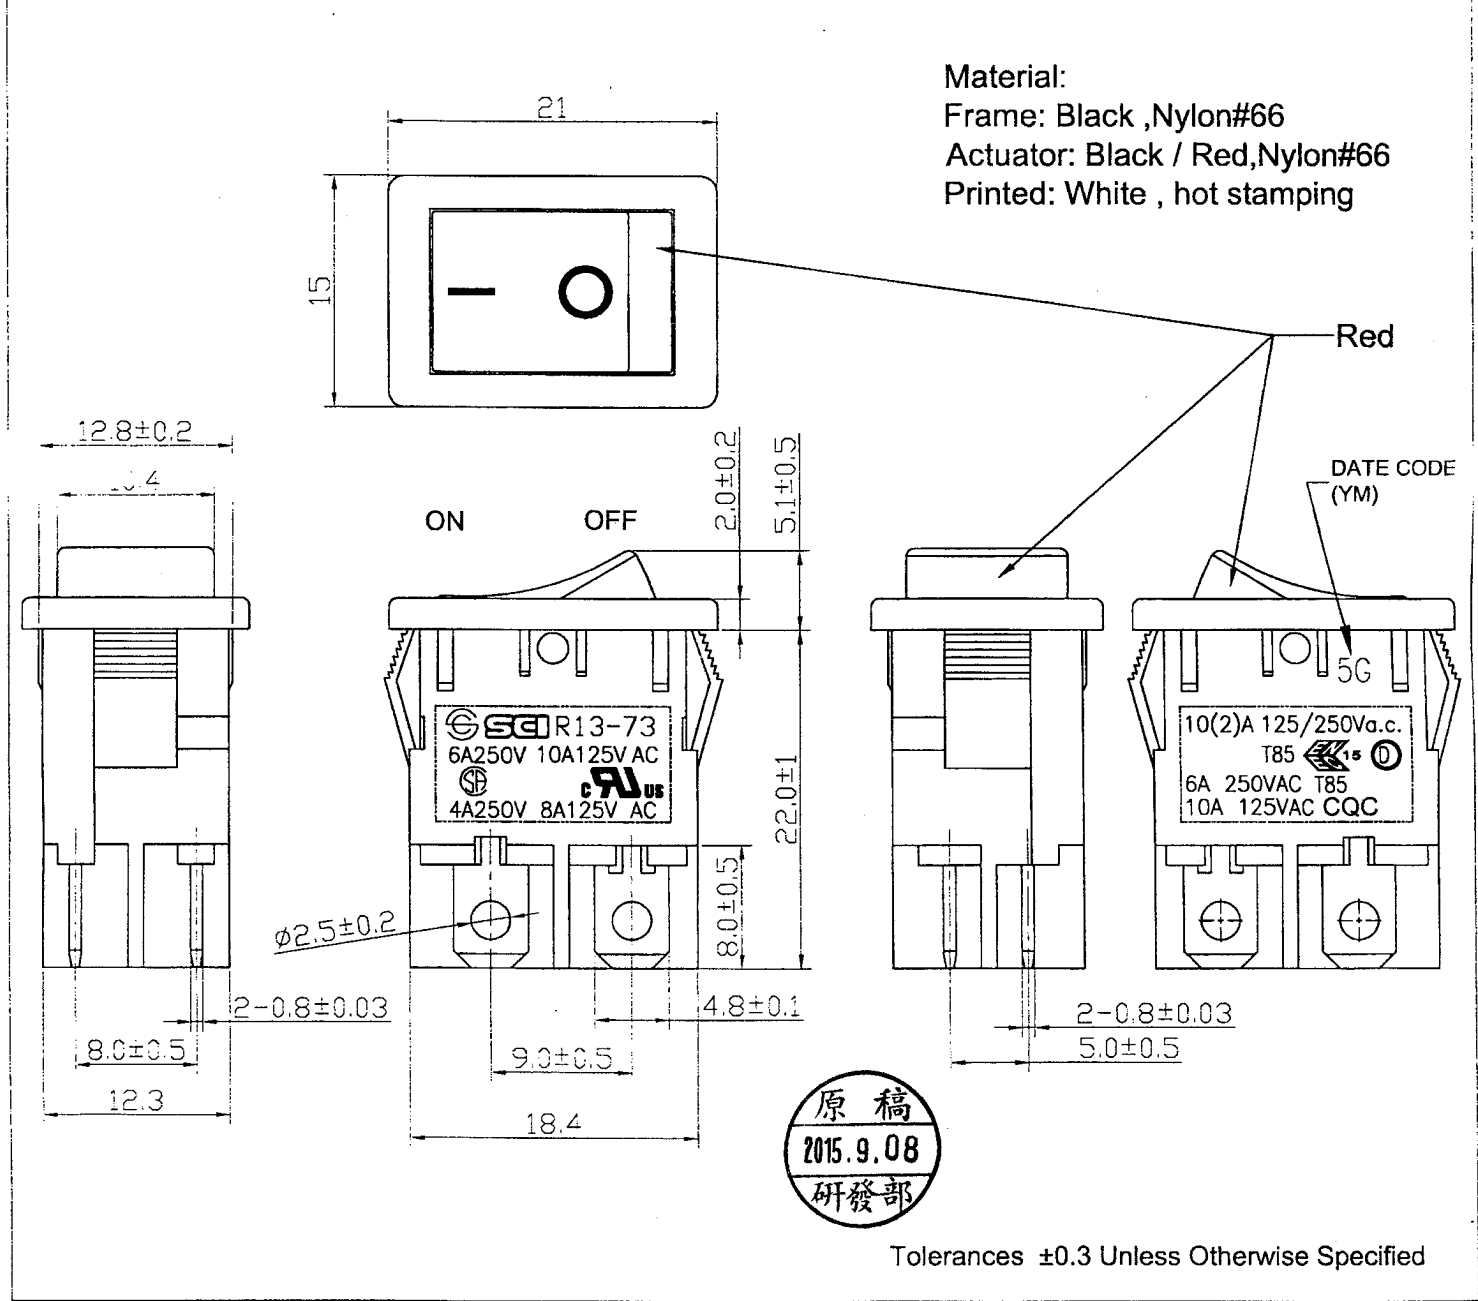





Rating	8A 125V, 4A 250V AC 	Mounting Hole	Circuit Diagram	
	10A 125V, 6A 250V AC 			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operating Temperature	-20°C~85°C	Thickness	X	Y
Switch Function	4R DPST ON-OFF	0.75...1.25	19.2-0.1	13.1+0.1
		1.25...2	19.4-0.1	13.1+0.1
		2...3	19.8-0.1	13.1+0.1



7/18/15	周傑輝	依實物增加噴印日期							
Date	Name	Description							NO
Drawn	Checked	Approved	SCI BOM NO.	1821421	Model Name	ROCKER SWITCH			
周傑輝			Customer No.		Model No.	R13-73A2-02	Rev.	1	
7/18/15	7/20/15	7/21-15	Unit	mm	 Shin Chin Industrial Co., Ltd.				