

Rating	50A 12VDC Max.(Start Switch) 20A 12VDC (Toggle Switch) 20mA 12VDC (LED Indicator)	<b>Mounting Hole</b> 	<b>Circuit Diagram</b> 
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		

**Descriptions:**





Switch: R13-423L3 3P SPST ON-OFF (RED LED).

Indicator: R9-100L (RED LED).

Push switch: A2-23B-07, 3P SPST (ON)-OFF (RED LED).

Safety Cover: R17-10, RED.

Panel: Aluminum, Water Transfer Printed, Carbon.

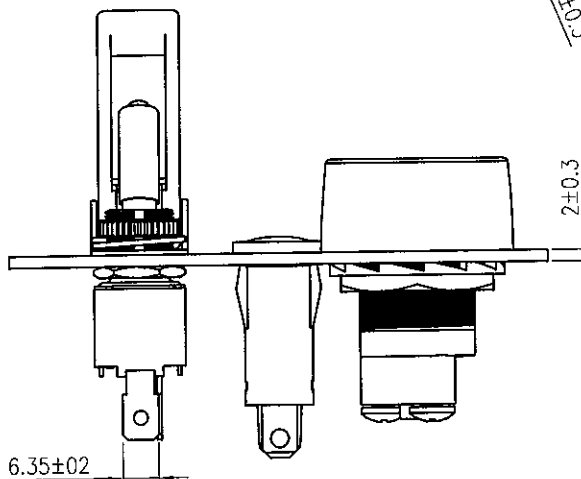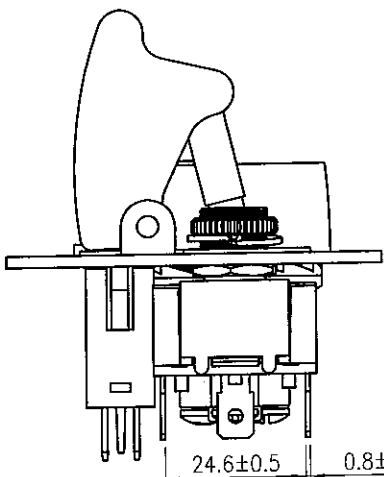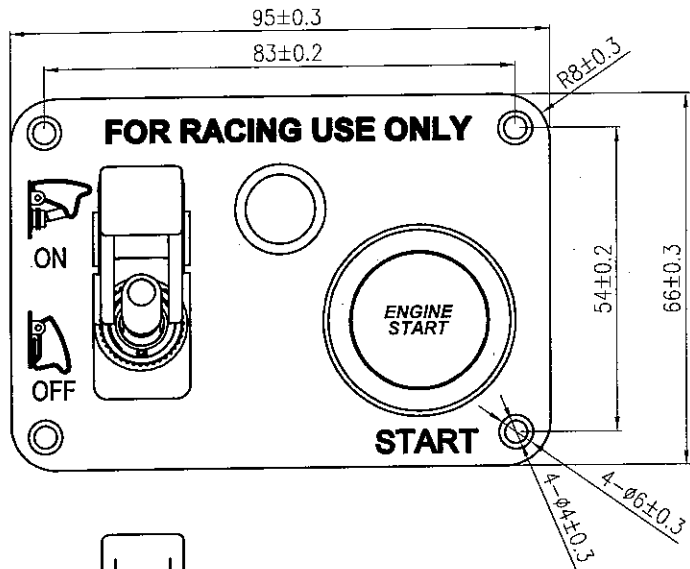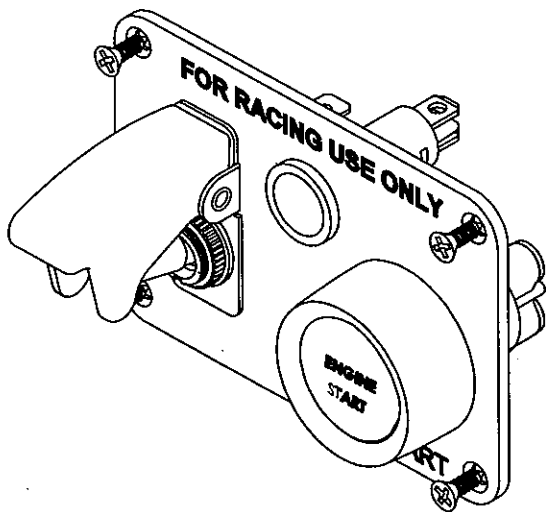

Date	Name	Description				NO
Drawn	Checked	Approved	SCI BOM No.	1130302	Model Name	Panel Switch
C.J.Chan			Customer No.		Model No.	R18-Q1A-23B423L3R17100L REV.
06/15/'09			Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD. 0	