


Insulation R	DC 500V 100M ohm Min.
Voltage Breakdown	AC 1000V 1 minute

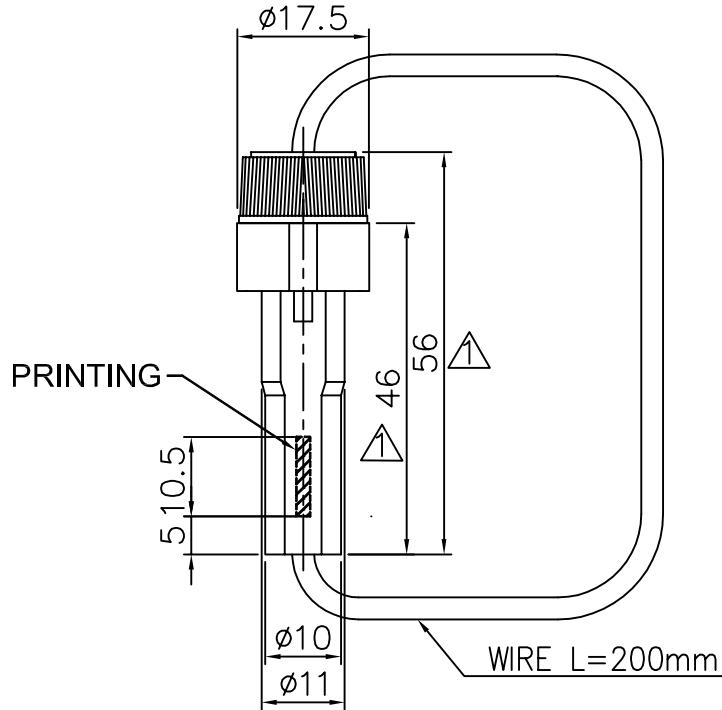

△ 註:正常公差±0.5

SCI No. R3-32 □ □

A: FOR FUSE- $\phi 5.2 \times 20\text{mm}$

B: FOR FUSE- $\phi 6.35 \times 32\text{mm}$

NO.	WIRE	CSA,UL 1015	RATING	PRINTING
1	12AWG RED WIRE		40A 32V DC	
2	14AWG RED WIRE		30A 32V DC	
3	16AWG RED WIRE		20A 32V DC	

適用機種料號有:

1310124,1310126,1310129,1310130

C1\PDM\R3\R3-32(See Table)(24-30)

09/25/'06	黃臆純	轉PDM				△
09/08/'06	吳士偉	依實物修改圖面:53.7-->56, 43.8-->46;並加注正常公差.				△
<b>Date</b>	<b>Name</b>	<b>Descriptions</b>				<b>NO</b>
<b>Drawing</b>	<b>Check</b>	<b>Approval</b>	<b>SCI No.</b>		<b>Model Name</b>	
吳士偉	李元生	李景煌	<b>Customer No.</b>		<b>Model No.</b>	(See Table)
09/08/'06	09/11/'06	09/14/'06	<b>Unit</b>	mm	SHIN CHIN INDUSTRIAL CO., LTD.	