

ASSEMtech Europe Ltd

PRODUCT DATA SHEET

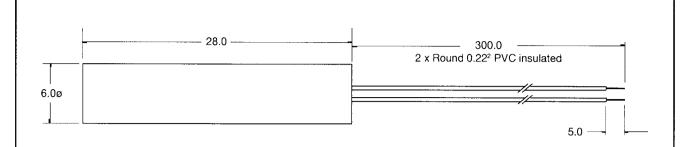

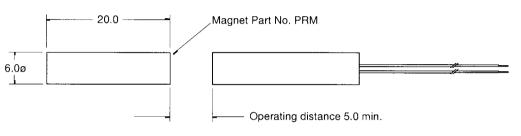

Drawings not to scale All dimensions in mm

SPECIFICATION

CONTACT FORM/STYLE		A/Open	
SWITCHING VOLTAGE	Max. Vac	100	
SWITCHING CURRENT	Max. A	0.25	
SWITCHING CAPACITY (RESISTIVE)	Max. VA	5.0	
CONTACT RESISTANCE	Max. mΩ	200	
SWITCHING DISTANCE	Min. mm	5.0	
OPERATING TEMPERATURE	Deg. °C	-20° + 70°	
STORAGE TEMPERATURE	Deg. °C	-25° + 70°	
CASE MATERIAL		Black Polypropylene	

CYLINDRICAL MAGNETIC PROXIMITY SWITCHES

PART NUMBER \$1369

Rev. No. Revision Note Date Signature	А	FIRST ISSUE	10.6.97	Þ.R.
	Rev. No.	Revision Note	Date	Signature



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

BS5750/ISO 9000 Reg. No. FM 21080