



Specifications

Current Rating:	1A
Housing Material:	30% Glass Filled PBT UL94V-0
Contact Material:	Gold Plated Brass
Contact Resistance:	20mΩ Max
Insulation Resistance:	5000MΩ Min
Operating Temperature:	-45°C to +105°C

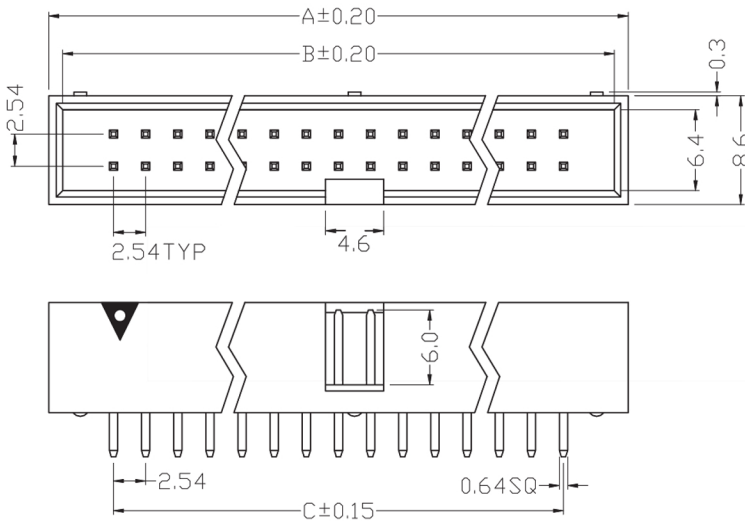

Dimension

position	A	B	C
06	15.24	13.04	5.08
08	17.78	15.58	7.62
10	20.32	18.12	10.16
12	22.86	20.66	12.70
14	25.40	23.20	15.24
16	27.94	25.74	17.78
20	33.02	30.82	22.86
24	38.10	35.90	27.94
26	40.64	38.44	30.48
30	45.72	43.52	35.56
34	50.80	48.60	40.64
40	58.42	56.22	48.26
50	71.12	68.92	60.96
60	83.82	81.62	73.66
64	88.90	86.70	78.74



P. C. B. Layout

