


ELECTRICAL CHARACTERISTIC		
①	CONTACT RESISTANCE: $\leq 30\text{m}\Omega$	
②	INSULATION RESISTANCE: $\geq 2\text{M}\Omega$	
③	WITHSTAND VOLTAGE: DC100V	
④	CURRENT RATING: 0.5A-3A/DC100V	
⑤	OPERATING TEMPERATURE: $-30^{\circ}\text{C}\sim 60^{\circ}\text{C}$	
6	CRIMPING PATCH	BRASS
5	SOLDERING PATCH	BRASS
4	BODY	BRASS
3	PLASTIC HANDLE	PVC
2	DIELECTRIC	POM
1	PIN	BRASS
ITEM	DESIGNATION	MATERIAL

TOLERANCE		SIGNATURES		DATE
0 - 10	± 0.05	DRAFT: WU JIA XIN		2021-7-6
10 - 99	± 0.5	CHECKED:		
100 - 999	± 10.0			
1000 - 9999	± 100.00			
10000 - 99999	± 1000.00			

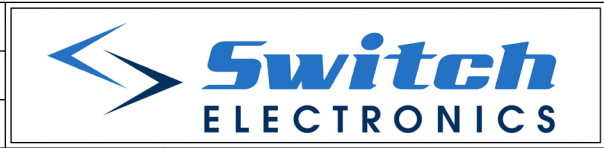

REV	PART NO. & SAMPLE NO.	DATE	BY
A			
B			

APPROVAL:		SCALE	UNIT	REV
SHEET		1:1	mm	\emptyset
OF				

TITLE	DC Jack W/Plastic Handle (2.1mm/2.5mm)
CUSTOMER	