


Specifications

Rated Temperature:	80°C
Standard:	DIN72551-51991
Conductor Material:	Bare Copper
Insulation Material:	PVC

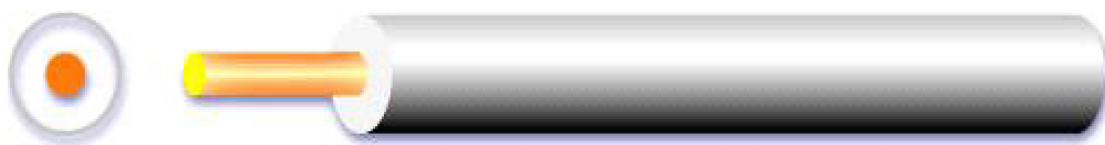

CONDUCTOR			INSULATION		MAX. COND. RESISTANCE Ω /km, (20°C, DC)	DIELECTRIC STRENGTH V (AC, 1min)
CROSS SECTION (mm ²)	CONSTRUCTION (No. /mm)	DIA (mm)	THICKNESS (mm)	O. D. (mm)		
0.35	12/0.2	0.80	0.25	1.40	54.5	1000
0.5	16/0.2	0.92	0.29	1.60	38.2	1000
0.75	24/0.2	1.13	0.34	1.90	25.4	1000
1.0	32/0.2	1.31	0.35	2.10	19.1	1000
1.5	30/0.25	1.58	0.36	2.40	13.0	1000
2.5	50/0.25	2.04	0.43	3.00	7.8	1000
4.0	56/0.3	2.59	0.51	3.70	4.8	1000
6.0	84/0.3	3.17	0.52	4.30	3.20	1000