



unimec 16300/16700/16800




Technical Data:

- 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
low temp: -40/+75°C
high temp: -40/+160°C
- through-hole version


Dimensions 16300:

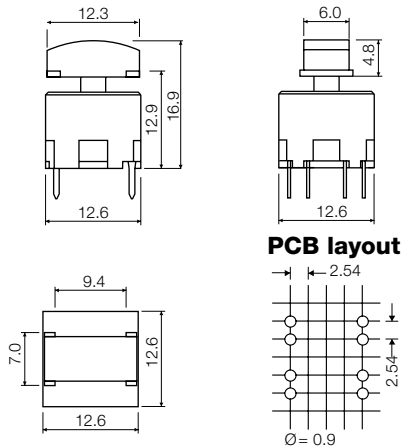


Dimensions 16700:

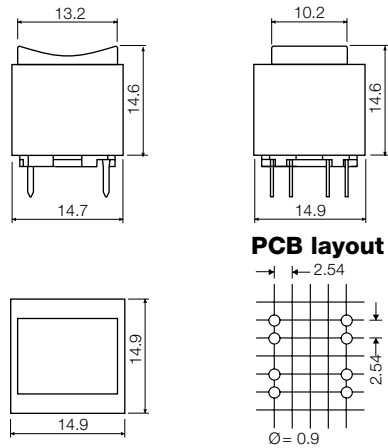



Dimensions 16800:

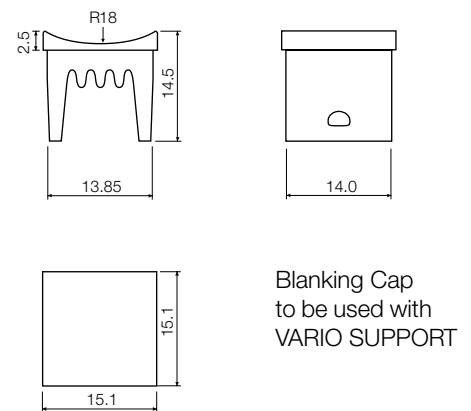

HOW TO ORDER

	1 5 + 1 6 3 0 0	00 blue	30 ultra blue	50 metal dark blue
	Switch	01 brown	40 dusty blue	53 metal light grey
	15501 mom. silver	02 green	42 aqua blue	57 metal dark grey
	15551 alt. silver	03 grey	32 mint green	58 metal bordeaux
	15502 mom. gold	04 yellow	33 tele grey	
	15552 alt. gold	05 golden	34 melon	
	15500 silent silver	06 white	38 noble red	
	15401 mom. silver	07 orange		
	high temp.	08 red		
	15451 alt. silver	09 black		
	high temp.			

1 5 + 1 6 7 0 0	00 blue
Switch	02 green
	03 grey
	04 yellow
	06 white
	08 red
	09 black

1 6 8 0 0	00 blue	11 transparent
Blanking Cap	01 brown	12 transparent green
	02 green	14 transparent yellow
	03 grey	18 transparent red
	04 yellow	
	05 golden	
	06 white	
	07 orange	
	08 red	
	09 black	

Ordering example: 15551 + 1670009