


Specifications

Tolerance: $\pm 5\%$
 Lead Wire Material: Tinned Copper
 Temperature Coefficient: 300ppm/ $^{\circ}\text{C}$
 Operating Temperature: -55°C to $+120^{\circ}\text{C}$

Dimension (Unit: mm)

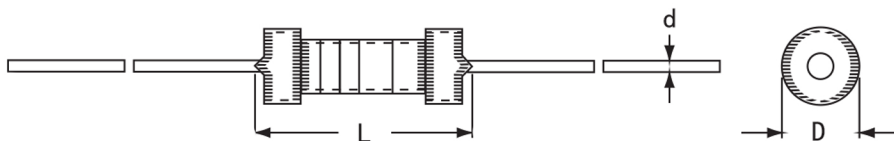

Power	Resistance Range	Dimensions (mm)			Maximum Working Voltage	Maximum Overload Voltage
		L	D	d		
1/4W	0R5-750R	6.0	2.3	0.52	150V	300V
1/2W	0R01-1K5	9.0	3.2	0.58	150V	400V
1W	0R01-1K5	11.0	4.5	0.75	150V	400V
2W	0R01-3K3	15.0	5.0	0.75	250V	400V
3W	0R01-4K7	15.0	5	0.75	350V	600V

Rated Power Derating Curve

