



TECHNICAL NOTE
Seat Back Replacement Instructions
February 2022



Tools Required


- 4mm Hex wrench




Replacement Parts Required

- Seat Back
- (2) Pivot Bolts

Step 1 : Using a 4mm hex wrench, remove the bolts at the bottom of the seat back, on each side.

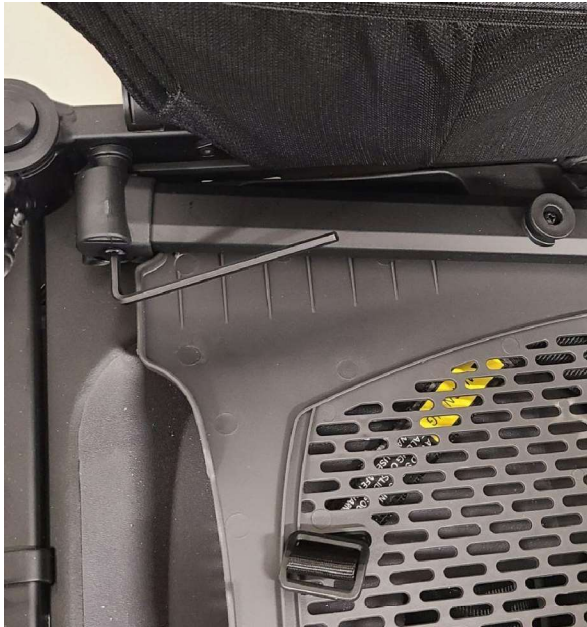

2. Remove the waist harnesses from each side of the old seat back by fishing the end of the harness webbing through the buckles. Once the buckles are freed, the harness is able to be removed through the back of the seat back.

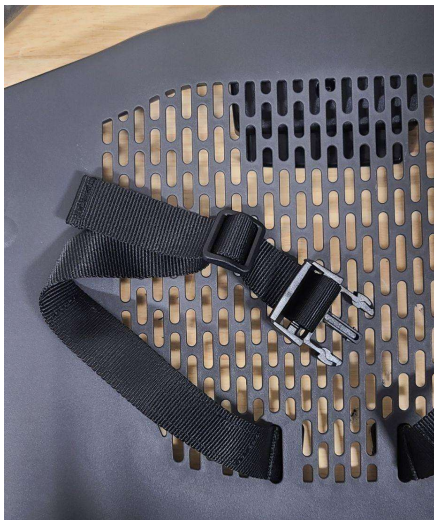

3. Install the new seat back and reinstall webbing by following the reverse process of Steps 1 and 2.