



**savox**

**PROFESSIONAL RADIO ACCESSORIES  
CATALOGUE 2015**

## TABLE OF CONTENTS

<b>CLASSIC</b>	<b><u>4</u></b>
Remote Speaker Microphones	<u>4</u>
C-C500 Remote Speaker Microphone / Push-To-Talk Unit	<u>4</u>
C-C550 Remote Speaker Microphone	<u>4</u>
Push-To-Talks	<u>5</u>
C-C400 Com Control Unit	<u>5</u>
C-C440 Com Control Unit	<u>5</u>
SR45M Push-To-Talk Unit	<u>6</u>
SR45M & Sidewinder Tactical Kits	<u>6</u>
SR45M & Talon Throat Mic Tactical Kits	<u>6</u>
Intrinsically Safe Kits	<u>7</u>
SR65M Push-To-Talk Intrinsically Safe Kits	<u>7</u>
Headsets	<u>10</u>
HC-1 Helmet-Com® Bone Conduction Helmet Kit	<u>10</u>
HC-2 Helmet-Com® Bone Conduction Helmet Kit	<u>10</u>
HC-E Helmet-Com® Bone Conduction Helmet Kit	<u>11</u>
Bone Conduction Helmet Kit	<u>11</u>
Bulldog Behind Head Heavy Duty Headset	<u>12</u>
N-C Noise-Com Hearing Protector Insert	<u>12</u>
N-H Over Head Heavy Duty Headset	<u>12</u>
Bullet Behind Head Lightweight Headset	<u>13</u>
Sidewinder Behind the Neck Lightweight Headset	<u>13</u>
Talon Throat Microphone	<u>13</u>
Voice Amplifiers & Kits	<u>14</u>
CSVA Voice Amplifier Base Unit	<u>14</u>
CSVA Voice Amp & Talon Throat Mic Hazmat Kit	<u>14</u>
CSVA Voice Amp & Sidewinder Headset Hazmat Kit	<u>14</u>
CSVA Voice Amp & Bullet Headset Hazmat Kit	<u>14</u>
SRVA & Talon Throat Mic (C-Hook Speaker) Hazmat Kits	<u>15</u>
SRVA & Talon Throat Mic (In-Line Speaker) Hazmat Kits	<u>15</u>
SRVA & Sidewinder Hazmat Kits	<u>15</u>
<b>XG</b>	<b><u>16</u></b>
Remote Speaker Microphones	<u>16</u>
XG C-C1 Remote Speaker Microphone	<u>16</u>
Headsets	<u>17</u>
XG HC-1 Bone Conductive Microphone Headset	<u>17</u>
XG HC-2 Bone Conductive Microphone Headset	<u>17</u>

## TABLE OF CONTENTS

<b>VIGILITE</b>	<b><u>18</u></b>
Covert Solutions	<u>18</u>
Covert Base Unit (CBU) Modular	<u>18</u>
CBU Modular Covert Kits with Earpiece & Keyfob	<u>19</u>
Clarity Covert Inductive Loop	<u>20</u>
Clarity Covert Kits with Earpiece & Keyfob	<u>20</u>
SEP 110, Covert, Inductive Loop, Base Unit	<u>21</u>
SEP 110 Inductive Neckloop Microphone	<u>21</u>
SEP 120 , Covert, Inductive Brooch, Base Unit	<u>22</u>
SEP 120 Inductive Brooch Microphone	<u>22</u>
Headsets	<u>23</u>
EM2 C-Hook Earpiece	<u>23</u>
SEP 190 Kit	<u>23</u>
Semi Covert	<u>23</u>
S1-7702 Series Modular Covert Kits	<u>23</u>
S1-7700 1-Wire Kit	<u>24</u>
S1-8800 2-Wire Kit	<u>24</u>
Accessories	<u>25</u>
Covert Accessories	<u>25</u>
Covert Carrying Solutions	<u>25</u>
Wireless Earpieces	<u>26</u>
<b>MISCELLANEOUS ACCESSORIES</b>	<b><u>27</u></b>
Throat Microphone Earpieces	<u>27</u>
Ear Tips, Headset Accessories	<u>27</u>
SR45 PTT Accessories	<u>27</u>
Strap Accessories	<u>28</u>
Extension & Expansion Cables	<u>28</u>
Radio Adaptors	<u>28</u>
<b>COMPONENTS REFERENCE GUIDE</b>	<b><u>29</u></b>
Headset Cable Assemblies	<u>29</u>
Connector Compatibility Chart (Standard)	<u>30</u>
Connector Compatibility Chart (Non-Stock)	<u>31</u>
Connector Compatibility Chart (Non-Standard / Non-Stock)	<u>32</u>

**CLASSIC**

**CLASSIC**

**Savox's original and globally accepted, heavy duty, high quality, time-tested and reliable audio accessory line for traditional two-way radios utilizing analog technology and our QR4 connector.**



**Remote Speaker Microphones**

**C-C500 RSM / PUSH-TO-TALK UNIT**



**Weight:** 200g **Size:** 110 x 65 x 25mm **Supply Voltage:** 2.5-10.0 vdc  
**Microphone:** Omnidirectional electret **Speaker Impedance:** 8/16/32 Ohm @ 1 khz  
**Cable:** 4mm dia, PU, length according to application **Humidity:** 95% RH, +63°C for 500 hours  
**Connectors:** 4-pole quick-release jack for headset, radio-specific connector  
**Temperature:** Operating -25 to +85°C (continuous), Storage -25 to +63°C  
**ESD/EMI Immunity:** Conforms to EN301 489-1 and EN301 489-18 **Ingress Protection:** IP67

DESCRIPTION	PART NUMBER
C-C500 Com Control, PTT, M1	L500162-10B1100
C-C500 Com Control, PTT, M4	L500192-10B1100
C-C500 Com Control, PTT, K1	L501112-10B1100
C-C500 Com Control, PTT, K2	L501122-10B1100
C-C500 Com Control, PTT, M6	L500112-10B1100
C-C500 Com Control, PTT, M7	L502132-10B1100

**C-C550 REMOTE SPEAKER MICROPHONE**



**Weight:** 170g **Size:** 79 X 115mm **Material:** Polyamide **Ingress Protection:** IP67  
**Microphone:** Omnidirectional, sensitivity -39dB +/-3dB **Supply Voltage:** 3.0-10.0 vdc  
**Fixing:** 360° rotating clothing clip **PTT Operational Lifetime:** 500,000 cycles  
**Connectors:** 4-pole quick-release jack for headset, radio-specific connector  
**Speaker Impedance:** 8 Ohm max 2W, SPL 90Db/0.5W/0.2m  
**Temperature:** Operating -40 to +85°C (continuous), Storage -25 to +63°C  
**ESD/EMI Immunity:** Conforms to EN301 489-1 and EN301 489-18

DESCRIPTION	PART NUMBER
C-C550 Com-Control, PTT, M4	L550192-10B1100
C-C550 Com-Control, PTT, M6	L550112-10B1100
C-C550 Com-Control, PTT, M7	L552132-10B1100

## CLASSIC

### Push-To-Talks



#### C-C400 Com-Control Unit

**Weight:** 120g (excluding clip) **Size:** 76 x 17mm **Cable:** According to application  
**Supply Voltage:** 2.5-10.0 vdc **Ingress Protection:** IP55  
**Connectors:** 4-pole quick-release jack for headset, radio-specific connector  
**Operating Temperature:** -25 to +85°C (continuous)  
**Storage Temperature:** -25 to +63°C **Humidity:** 95% RH, + 63°C for 500 hours  
**ESD/EMI Immunity:** Conforms to EN301 489-1 and EN301 489-18

DESCRIPTION	PART NUMBER
C-C400 Com Control, PTT, M1	L40162
C-C400 Com Control, PTT, M4	L40192
C-C400 Com Control, PTT, M7	L42132
C-C400 Com Control, PTT, M6	L40112
C-C400 Com Control, PTT, K1	L41112
C-C400 Com Control, PTT, K2	L41122

**IS Approval:** Atex EX II 2 GD, EX ib IIC T6, Ex ibD, 21 T80

DESCRIPTION	PART NUMBER
C-C400 Com Control, PTT, IS, K2	K43132
C-C400 Com Control, PTT, IS, M4	K43292
C-C400 Com Control, PTT, IS, M6	K43112



#### C-C440 Com-Control Unit

**Weight:** 140g (excluding the connector cable) **Size:** PTT - 66mm diameter  
**Cable:** According to application **Material:** Polyamide **Ingress Protection:** IP67  
**Connectors:** 4-pole quick-release jack for headset, radio-specific connector  
**Operating Temperature:** -40 to +85°C (continuous) **Fixing:** Rotating clothing clip  
**Supply Voltage:** 3.0-10.0 vdc **Humidity:** 100% RH, +40°C for 21 days  
**ESD/EMI Immunity:** Conforms to EN301 489-1 and EN301 489-18

DESCRIPTION	PART NUMBER
C-C440 Com Control, PTT, M4	L440192
C-C440 Com Control, PTT, M6	L440112
C-C440 Com Control, PTT, M7	L442132

## CLASSIC

### Push-To-Talks



#### SR45M PUSH-TO-TALK UNIT

**Weight:** 120g **Ingress Protection:** IP57  
**Connector:** Con-Space quick-release socket (QD connector)  
**Operating Temperature:** -20 to +40°C **Humidity:** 95% RH, 63°C for 500 hours  
**ESD/EMI Immunity:** Conforms to EN301 489-1

DESCRIPTION	PART NUMBER
SR45M PTT, Tactile, K2	192700001+06004
SR45M PTT, Tactile, M4	192700001+09013
SR45M PTT, Tactile, M6	192700001+09014
SR45M PTT, Tactile, M7	192700001+09026
SR45M PTT, Tactile, HR6	192700001+32001
SR45M PTT, Quiet, Guard, M6	192712000+09014
SR45M PTT, Quiet, Guard, M7	192712000+09026
SR45M PTT, Quiet, Guard, HR6	192712000+32001



#### SR45M & SIDEWINDER TACTICAL KITS

**Microphone:** Boom type, electret, Sensitivity -43dB, Freq.Resp. 250Hz-4Khz  
**Speaker:** Single, Sens. 108dB-10mW, Freq.Resp. 250Hz - 4KHz, Imp 88Ohm  
**Ingress Protection:** IP57 **Cable:** 4.5mm dia **Cable Pull Strength:** 69kgs-31g  
**Operating Temperature:** -20 to +40°C  
**ESD/EMI Immunity:** Conforms to EN301 489-1

DESCRIPTION	PART NUMBER
Kit, SR45M, Quiet, PTT Guard, Sidewinder, M6	192712001+09014
Kit, SR45M, Quiet, PTT Guard, Sidewinder, M7	192712001+09026
Kit, SR45M, Quiet, PTT Guard, Sidewinder, MA3	192712001+51001



#### SR45M & TALON THROAT MIC TACTICAL KITS

**Microphone:** Proprietary, Sensitivity -32dB, Freq.Resp. 300Hz-4Khz  
**Speaker:** In-Line, Single Airtube, Sens. 110dB-10mW, Freq.Resp. 200Hz - 5KHz, Imp 320ohm  
**Cable:** 4.5mm dia **Cable Pull Strength:** 84kgs-38g  
**Operating Temperature:** -20 to +40°C **Ingress Protection:** IP57  
**ESD/EMI Immunity:** Conforms to EN301 489-1

DESCRIPTION	PART NUMBER
Kit, SR45M, Quiet, PTT Guard, Talon, In-Line Speaker, M6	192712002+09014
Kit, SR45M, Quiet, PTT Guard, Talon, In-Line Speaker, M7	192712002+09026
Kit, SR45M, Quiet, PTT Guard, Talon, In-Line Speaker, MA3	192712002+51001

## CLASSIC

### Intrinsically Safe Kits

**CERTIFICATIONS**


 IEC  
 Ex Ia IIC T4  
 IECEK IT807.0015X

 0399  
 Ex Ia IIC T4  
 IT807ATEX25578X

 CLASS I, II, III, DIV.1,  
 GROUPS, A - G  
 T4 Exia

### SR65M BASE UNIT

**Microphone:** Proprietary, Sensitivity -32dB, Freq. Resp. 300Hz-4KHz  
**Speaker:** Varies (see speaker section for details)  
**PTT:** Heavy Duty, Single PTT (Remote Available), Silent Action, PTT Guard  
**Operating Temperature:** -20 to +40°C (continuous)  
**Ingress Protection:** IP57 **Cable:** 4.5mm dia **Cable Pull Strength:** 84kgs-38g

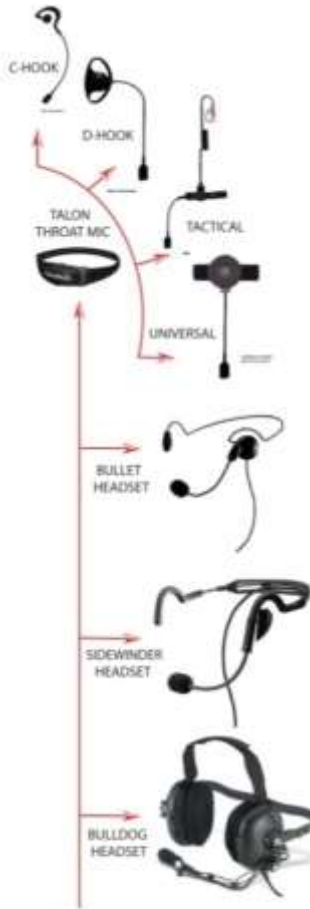

DESCRIPTION	PART NUMBER
SR65M, Tactile Switch, IS, S4	1926-00-001+05012
SR65M, Tactile Switch, IS, K2	1926-00-001+06004
SR65M, Tactile Switch, IS, M1	1926-00-001+09007
SR65M, Tactile Switch, IS, M4	1926-00-001+09013
SR65M, Tactile Switch, IS, M6	1926-00-001+09014
SR65M, Tactile Switch, IS, M7	1926-00-001+09026
Kit, SR65M with Tactile Switch, Talon Throat Mic & Universal Speaker, Radio Cable, IS, S4	1926-10-001+05012
Kit, SR65M with Tactile Switch, Talon Throat Mic & Universal Speaker, Radio Cable, IS, K2	1926-10-001+06004
Kit, SR65M with Tactile Switch, Talon Throat Mic & Universal Speaker, Radio Cable, IS, M4	1926-10-001+09013
Kit, SR65M with Tactile Switch, Talon Throat Mic & Universal Speaker, Radio Cable, IS, M6	1926-10-001+09014
Kit, SR65M with Tactile Switch, Talon Throat Mic & Universal Speaker, Radio Cable, IS, M7	1926-10-001+09026



## CLASSIC

### Intrinsically Safe Kits

**CERTIFICATIONS**


IEC  
Ex Ia IIC T4  
IECEx IT807.0015X

CE 0399  
Ex Ia IIC T4  
IT807ATEX25578X

CLASS I, II, III, DIV.1,  
GROUPS, A - G  
T4 Exia

### SR65M PTT INTRINSICALLY SAFE KITS

**Microphone:** Proprietary, Sensitivity -32dB, Freq. Resp. 300Hz-4KHz  
**Speaker:** Varies (see speaker section for details) **Ingress Protection:** IP57  
**PTT:** Heavy Duty, Single PTT (Remote Available), Silent Action, PTT Guard  
**Operating Temperature:** -20 to +40°C (continuous)  
**Cable:** 4.5mm dia **Cable Pull Strength:** 84kgs-38g

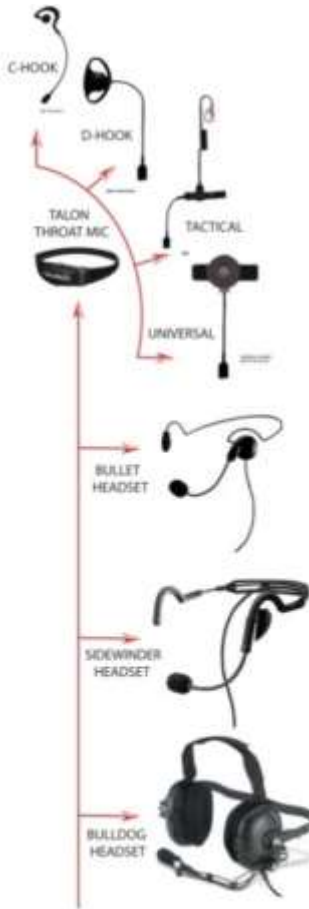

DESCRIPTION	PART NUMBER
Kit, SR65M with Tactile Switch, Talon Throat Mic & Over Ear Speaker, Radio Cable, IS, S4	1926-10-002+05012
Kit, SR65M with Tactile Switch, Talon Throat Mic & Over Ear Speaker, Radio Cable, IS, K2	1926-10-002+06004
Kit, SR65M with Tactile Switch, Talon Throat Mic & Over Ear Speaker, Radio Cable, IS, M4	1926-10-002+09013
Kit, SR65M with Tactile Switch, Talon Throat Mic & Over Ear Speaker, Radio Cable, IS, M6	1926-10-002+09014
Kit, SR65M with Tactile Switch, Talon Throat Mic & Over Ear Speaker, Radio Cable, IS, M7	1926-10-002+09026
Kit, SR65M with Tactile Switch, Talon Throat Mic & Tactical Speaker, Radio Cable, IS, S4	1926-10-003+05012
Kit, SR65M with Tactile Switch, Talon Throat Mic & Tactical Speaker, Radio Cable, IS, K2	1926-10-003+06004
Kit, SR65M with Tactile Switch, Talon Throat Mic & Tactical Speaker, Radio Cable, IS, M4	1926-10-003+09013
Kit, SR65M with Tactile Switch, Talon Throat Mic & Tactical Speaker, Radio Cable, IS, M6	1926-10-003+09014
Kit, SR65M with Tactile Switch, Talon Throat Mic & Tactical Speaker, Radio Cable, IS, M7	1926-10-003+09026
Kit, SR65M with Tactile Switch & Sidewinder Headset, Radio Cable, IS, S4	1926-10-004+05012
Kit, SR65M with Tactile Switch & Sidewinder Headset, Radio Cable, IS, K2	1926-10-004+06004
Kit, SR65M with Tactile Switch & Sidewinder Headset, Radio Cable, IS, M4	1926-10-004+09013
Kit, SR65M with Tactile Switch & Sidewinder Headset, Radio Cable, IS, M6	1926-10-004+09014
Kit, SR65M with Tactile Switch & Sidewinder Headset, Radio Cable, IS, M7	1926-10-004+09026



CLASSIC

Intrinsically Safe Kits

**CERTIFICATIONS**


IEC  
Ex Ia IIC T4  
IECEx IT807.0015X

CE 0399  
Ex Ia IIC T4  
IT807ATEX25578X

CLASS I, II, III, DIV.1,  
GROUPS, A - G  
T4 Exia

**SR65M PTT INTRINSICALLY SAFE KITS**

**Microphone:** Proprietary, Sensitivity -32dB, Freq. Resp. 300Hz-4KHz  
**Speaker:** Varies (see speaker section for details)  
**PTT:** Heavy Duty, Single PTT (Remote Available), Silent Action, PTT Guard  
**Operating Temperature:** -20 to +40°C (continuous)  
**Ingress Protection:** IP57 **Cable:** 4.5mm dia **Cable Pull Strength:** 84kgs-38g

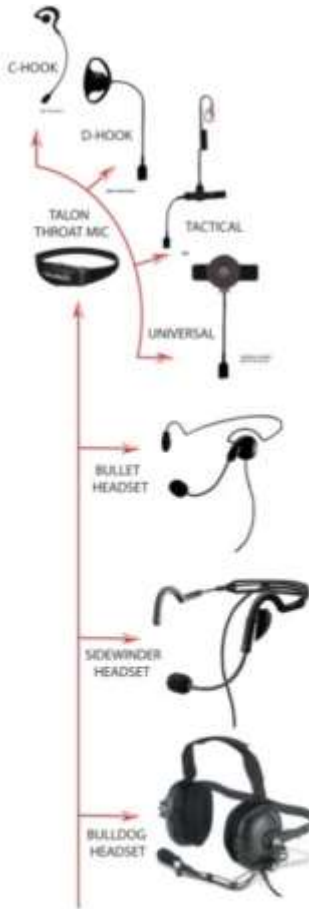

DESCRIPTION	PART NUMBER
Kit, SR65M with Tactile Switch & Bulldog Headset, Radio Cable, IS, S4	1926-10-005+05012
Kit, SR65M with Tactile Switch & Bulldog Headset, Radio Cable, IS, K2	1926-10-005+06004
Kit, SR65M with Tactile Switch & Bulldog Headset, Radio Cable, IS, M4	1926-10-005+09013
Kit, SR65M with Tactile Switch & Bulldog Headset, Radio Cable, IS, M6	1926-10-005+09014
Kit, SR65M with Tactile Switch & Bulldog Headset, Radio Cable, IS, M7	1926-10-005+09026
Kit, SR65M with Tactile Switch, Talon Throat Mic & Behind Ear Speaker, Radio Cable, IS, S4	1926-10-006+05012
Kit, SR65M with Tactile Switch, Talon Throat Mic & Behind Ear Speaker, Radio Cable, IS, K2	1926-10-006+06004
Kit, SR65M with Tactile Switch, Talon Throat Mic & Behind Ear Speaker, Radio Cable, IS, M4	1926-10-006+09013
Kit, SR65M with Tactile Switch, Talon Throat Mic & Behind Ear Speaker, Radio Cable, IS, M6	1926-10-006+09014
Kit, SR65M with Tactile Switch, Talon Throat Mic & Behind Ear Speaker, Radio Cable, IS, M7	1926-10-006+09026
Kit, SR65M with Tactile Switch & Bullet Headset, Radio Cable, IS, S4	1926-10-009+05012
Kit, SR65M with Tactile Switch & Bullet Headset, Radio Cable, IS, K2	1926-10-009+06004
Kit, SR65M with Tactile Switch & Bullet Headset, Radio Cable, IS, M4	1926-10-009+09013
Kit, SR65M with Tactile Switch & Bullet Headset, Radio Cable, IS, M6	1926-10-009+09014
Kit, SR65M with Tactile Switch & Bullet Headset, Radio Cable, IS, M7	1926-10-009+09026

## CLASSIC

### Headsets



#### HC-1 HELMET-COM® BONE CONDUCTION HELMET KIT

**Weight:** 85g **Speaker Impedance:** 32 Ohm **Connector:** 4-pole quick-release plug  
**Microphone:** Vibration-sensitive, impedance approx. 3.5k Ohm @ 1KHz  
**Coiled Cable:** Flame-retardant, 4mm dia/380mm  
**Straight Cable:** Flashover-proof, 4mm dia/750mm  
**Operating Temperature:** -25 to +85°C (continuous)  
**Storage Temperature:** -25 to +63°C **Humidity:** 95% RH, 63°C for 500 hours

DESCRIPTION	PART NUMBER
HC-1 Bone Conduction Helmet Unit, Coiled cable, IP56, Short mic arm, TP120 Type (Savox), QR4	L52000
HC-1 Bone Conduction Helmet Unit, Coiled cable, IP56, Long mic arm, TP120 Type (Savox), QR4	L52005
HC-1 Bone Conduction Helmet Unit, Straight cable, IP56, Short mic arm, TP120 Type (Savox), QR4	L52000-0002

\*Available in Classic line and XG line



#### HC-2 HELMET-COM® BONE CONDUCTION HELMET KIT

**Weight:** 85g **Size:** 40 x 160mm **Speaker Impedance:** 32 Ohm  
**Connector:** 4-pole quick-release connector **Humidity:** 95% RH, 63°C for 500 hours  
**Microphone:** Vibration-sensitive, impedance approx. 3.5k Ohm @ 1KHz  
**Coiled Cable:** Flame-retardant, 4mm dia/380mm  
**Straight Cable:** Flashover-proof, 4mm dia/750mm  
**Temperature:** Operating -25 to +85°C (continuous) , Storage -25 to +63°C

DESCRIPTION	PART NUMBER
HC-2 Helmet Unit, Bone Conduction, Coiled cable, IP56, 2 Speakers, TP120 Type (Savox), QR4	L52010
HC-2FP Helmet Unit, Bone Conduction, Coiled cable, Flash-proof cable, 2 Spkrs, TP120 Type (Savox), QR4	L52011

## CLASSIC

### Headsets



#### HC-E HELMET-COM® HELMET KIT

**Weight:** 70g **Connector:** 4-pole quick-release connector  
**Speaker Impedance:** 32 Ohm **Humidity:** 95% RH, 63°C for 500 hours  
**Microphone:** Electret, impedance 2.2k Ohm @ 1KHz  
**Coiled Cable:** Flame-retardant, 4mm dia/380mm  
**Straight Cable:** Flashover-proof, 4mm dia/750mm  
**Operating Temperature:** -25 to +63°C (continuous)

DESCRIPTION	PART NUMBER
HC-E Helmet Unit, Electret mic, Coiled cable, 1 Speaker, TP120 Type (Savox), QR4	L52100
HC-EFP Helmet Unit, Electret mic, Coiled cable, Flash-proof cable, 1 Speaker, TP120 Type (Savox), QR4	L52101



#### BONE CONDUCTION HELMET KIT

**Speaker Impedance:** 32 Ohm **Connector:** 4-pole quick-release connector  
**Microphone:** Bone Conduction, impedance approx. 3.5k Ohm @ 1KHz  
**Coiled Cable:** Flame-retardant, 4mm dia/380mm  
**Straight Cable:** Flashover-proof, 4mm dia/750mm  
**Operating Temperature:** -25 to +63°C (continuous)  
**Humidity:** 95% RH, 63°C for 500 hours  
**IS Approval:** Atex/Ex II 2 GD, ib IIC T4, Ex ibD 21 T130



DESCRIPTION	PART NUMBER
HC-1 Bone Conduction Helmet Unit, ATEX-EXII approved, Coiled cable, Short, TP120 Type (Savox), QR4	L53004
HC-1 Bone Conduction Helmet Unit, ATEX-EXII approved, Coiled cable, Long, TP120 Type (Savox), QR4	L53000
HC-2FP Bone Conduction Helmet Unit, ATEX-EXII approved, Coiled cable, Flash-proof cable, 2 Spkrs, TP120 Type (Savox), QR4	L53011
HC-EFP Electret Mic Helmet Unit, ATEX-EXII approved, Coiled cable, Flash-proof cable, 1 Spkr, TP120 Type (Savox), QR4	L53101

## CLASSIC

### Headsets



#### BULLDOG BEHIND HEAD HEAVY DUTY HEADSET

**Microphone:** Integrated, Electret, Noise cancelling,  
Sensitivity -43dB, Impedance 2.2k ohm **Attenuation:** 24dB NRR  
**Speaker:** Dual Heavy Duty, Impedance 88 ohm

DESCRIPTION	PART NUMBER
Bulldog Behind Head Heavy Duty Headset, CS	1926-03-004



#### N-C NOISE-COM HEARING PROTECTOR INSERT HEADSET

**Weight:** 81g **Size:** 70 x 175mm **Humidity:** 95% RH, +63°C for 500 hours  
**Microphone:** Noise cancelling, Impedance 32 ohm @ 1k hz  
**Speaker:** Impedance 32 ohm @ 1k hz (+/-15%)  
**Coiled Cable:** Flame-retardant, 4mm dia, 270mm, PUR  
**Connector:** 4-pole quick-release connector  
**Operating Temperature:** -25 to +63°C (continuous)

DESCRIPTION	PART NUMBER
N-C Noise Com Hearing Protector Insert Headset, Multi-purpose, Coiled cable, TP120 Type (Savox), QR4	L51064
XG N-C Noise Com Hearing Protector Insert Headset, QR5	K50729

**IS Approval:** Atex EX II 2 G, EX ib IIC T4, Ex ibD, 21 T130

DESCRIPTION	PART NUMBER
N-C Hearing Protector Insert Headset, ATEX-EXII approved, Multi-purpose, Coiled cable, TP120 Type (Savox), QR4	L51037



#### N-H OVER HEAD HEAVY DUTY HEADSET

**Weight:** 430g **Ingress Protection:** IP54 **Audio Output:** 80+/-3dB, 200mW, 0.5m  
**Microphone:** Noise cancelling, Sensitivity -43dB, Impedance 2.2k ohm  
**Speaker:** Impedance 2x32 +/-15% @ 1k hz 1V  
**Attenuation:** SNR 32dB **Distortion:** 5% maximum @ 1.2k Hz 200mW  
**EDS/EMI Immunity:** Conforms to EN301 489-1 and EN301 489-18

DESCRIPTION	PART NUMBER
Black/Orange N-H Headset, QR5	K50692-0101
Yellow/Orange N-H Headset, QR5	K50692-0201

\*Available in Classic line and XG line

## CLASSIC

### Headsets

#### BULLET BEHIND HEAD LIGHTWEIGHT HEADSET



**Microphone:** Integrated, Electret, Sensitivity -40dB, Impedance 2.2k ohm  
**Speaker:** Single, Impedance 88 ohm

DESCRIPTION	PART NUMBER
Bullet Behind Head Lightweight Headset, CS	1926-03-007



#### SIDEWINDER BEHIND NECK LIGHTWEIGHT HEADSET

**Weight:** 80g **Colour:** Matt Black  
**Microphone:** Integrated, Electret, Sensitivity -43dB +/-3dB, Impedance 2.2 ohm  
**Speaker:** Single, Impedance 88 ohm

DESCRIPTION	PART NUMBER
Sidewinder Behind Neck Lightweight Headset, CS	1926-03-006

#### TALON THROAT MICROPHONE

**Weight:** 40g **Colour:** Matt Black  
**Microphone Sensitivity:** -32 +/-6dB **Speaker Impedance:** 77 to 88 ohm



DESCRIPTION	PART NUMBER
Talon Throat Mic, Base Unit (hearing option required), CS QD	1926-01-010
Talon Throat Mic, Base Unit (hearing option required), TP120 Type (Savox), QR4	1926-01-013
Talon Throat Mic, Base Unit (hearing option required), QR5	1926-01-014
Talon Throat Mic, Base Unit (hearing option required), Buckle Strap (blank ribbon), CS QD	1926-01-015
Talon Throat Mic, Base Unit (hearing option required), Velcro Strap (blank ribbon), CS QD	1926-01-016
Talon Throat Mic only, No hearing option required, Velcro Strap (blank ribbon), CS QD	1926-02-007
Talon Throat Mic only, No hearing option required, Buckle Strap (blank ribbon), CS QD	1926-02-008

## CLASSIC

### Voice Amplifiers & Kits



#### CSVA VOICE AMPLIFIER BASE UNIT

**Weight:** 13.7oz, 390g **Colour:** Matt Black **Voice Amp:** 450hz - 9khz  
**Water Resistant:** YES **ROHS Compliant:** Yes **Adjustable Mounting:** Yes  
**Microphone:** Interchangeable,  
**Cable Pull Strength:** 69lb, 31kg  
**Battery Life:** 40 hours operation, 200 hours standby

DESCRIPTION	PART NUMBER
CSVA Voice Amplifier Base Unit, Headset required	1921-01-000



#### CSVA VOICE AMP & TALON THROAT MIC HAZMAT KIT

**Microphone:** Proprietary, Sensitivity -32dB, Freq. Resp. 300hz - 4khz  
**Speaker:** C-Hook, Sens. 108dB-10mW, Freq. Resp. 250hz - 10khz, Imp 32ohm  
**Voice Amp:** 450hz - 9khz **Cable:** 4.0mm dia, pull strength 85kg-38g  
**Operating Temperature:** -20 to +40°C **Ingress Protection:** IP57  
**Battery Life:** 40 hours operating, 200 hours standby

DESCRIPTION	PART NUMBER
Kit, CSVA, Throat Mic	1921-03-001



#### CSVA VOICE AMP & SIDEWINDER HEADSET HAZMAT KIT

**Microphone:** Boom Type, Electret, Sensitivity -43dB, Freq. Resp. 250hz - 4khz  
**Voice Amp:** 450hz - 9khz **Cable:** 4.0mm dia, pull strength 85kg-38g  
**Operating Temperature:** -20 to +40°C **Ingress Protection:** IP57  
**Battery Life:** 40 hours operating, 200 hours standby

DESCRIPTION	PART NUMBER
Kit, CSVA, Sidewinder Headset	1921-03-002



#### CSVA VOICE AMP & BULLET HEADSET HAZMAT KIT

**Microphone:** Integrated, Electret, Sensitivity -40dB, Impedance 2.2kohm  
**Speaker:** Single, Impedance 88ohm  
**Voice Amp:** 450hz - 9khz **Cable:** 4.0mm dia, pull strength 85kg-38g  
**Operating Temperature:** -20 to +40°C **Ingress Protection:** IP57  
**Battery Life:** 40 hours operating, 200 hours standby

DESCRIPTION	PART NUMBER
Kit, CSVA, Bullet Headset	1921-05-002

## CLASSIC

### Voice Amplifiers & PTT Kits



#### SRVA & TALON THROAT MIC (C-HOOK SPEAKER) HAZMAT KITS

**Microphone:** Proprietary, Sensitivity -32dB, Freq. Resp. 300Hz- 4KHz  
**Speaker:** C-Hook / Impedance 32ohm, Sensitivity 108dB-10mW, Freq. Resp. 250Hz – 10000Hz  
**Voice Amp:** 450Hz - 9000Hz **Battery Life:** 40hours operating, 200hours standby  
**PTT:** Tactile, Single PTT, Silent Action **Ingress Protection:** IP57  
**Operating Temperature:** -20 to 40°C **Cable:** 4.0mm dia, Pull strength 85kgs-38g

DESCRIPTION	PART NUMBER
Kit, SRVA, Talon, C-Hook Spkr, Cable, K2	192003006+06004
Kit, SRVA, Talon, C-Hook Spkr, Cable, S4	192003006+05012
Kit, SRVA, Talon, C-Hook Spkr, Cable, M6	192003006+09014
Kit, SRVA, Talon, C-Hook Spkr, Cable, M7	192003006+09026
Kit, SRVA, Talon, C-Hook Spkr, Cable, MA3	192003006+51001



#### SRVA & TALON THROAT MIC (IN-LINE SPEAKER) HAZMAT KITS

**Microphone:** Proprietary, Sensitivity -32dB, Freq. Resp. 300Hz- 4KHz  
**Speaker:** In Line, Single Airtube, Impedance 32ohm, Sensitivity 110dB-10mW, Freq. Resp. 200Hz – 5000Hz **Voice Amp:** 450Hz - 9000Hz  
**PTT:** Tactile, Single PTT, Silent Action **Ingress Protection:** IP57  
**Operating Temperature:** -20 to 40°C **Cable:** 4.0mm dia, Pull strength 85kgs-38g  
**Battery Life:** 40 hours operating, 200 hours standby

DESCRIPTION	PART NUMBER
Kit, SRVA, Talon, In-Line Speaker, Cable, K2	192003005+06004
Kit, SRVA, Talon, In-Line Speaker, Cable, S4	192003005+05012
Kit, SRVA, Talon, In-Line Speaker, Cable, M1	192003005+09007
Kit, SRVA, Talon, In-Line Speaker, Cable, M4	192003005+09013
Kit, SRVA, Talon, In-Line Speaker, Cable, M6	192003005+09014
Kit, SRVA, Talon, In-Line Speaker, Cable, M7	192003005+09026
Kit, SRVA, Talon, In-Line Speaker, Cable, MA3	192003005+51001



#### SRVA & SIDEWINDER HAZMAT KITS

**Microphone:** Boom Type, Electret, Sensitivity -43dB, Freq. Resp. 250Hz- 4KHz  
**Speaker:** Single, Impedance 88ohm, Sensitivity 108dB-10mW, Freq. Resp. 250Hz – 4KHz  
**Voice Amp:** 450Hz - 9000Hz **Battery Life:** 40 hours operating, 200 hours standby  
**PTT:** Tactile, Single PTT , Silent Action **Ingress Protection:** IP57  
**Operating Temperature:** -20 to 40°C **Cable:** 4.0mm dia, Pull strength 85kgs-38g

DESCRIPTION	PART NUMBER
Kit, SRVA, Sidewinder, Cable, M1	192003004+09007
Kit, SRVA, Sidewinder, Cable, M6	192003004+09014
Kit, SRVA, Sidewinder, Cable, M7	192003004+09026

**XG**

**XG**

**Savox's Next Generation product line comes with superior audio technology that is LOUD N' CLEAR®. The XG Line is designed specifically for use with digital two-way radio communications for today's extreme working environments and allows for easy end user features and capabilities customization.**

Note: While the Savox Classic line features the much loved Q4 connector, the XG line contains the new Q5 connector for better functionality. See page 29 for all connector types.



**Remote Speaker Microphones**

**XG C-C1 REMOTE SPEAKER MICROPHONE**



**Weight:** 170g **Size:** 115mm x 70mm x 38mm **Material:** Polyamide  
**Colour Options:** Black housing with red PTT buttons, Yellow Housing with black PTT buttons  
**Supply Voltage:** 3-10vdc, powered from radio  
**Fixing:** Rugged 360° rotating clothing clip **Current Drain:** 6mA @ idle state  
**Connector:** Savox QR5 quick-release connector for headset, 3.5mm jack connector for earphone **Ingress protection:** IP67 & MIL-STD-810G, procedure 1  
**Speaker:** 8 ohm, max 2W, SPL 90dB, 0.5W, 0.2m  
**Microphone:** Omni directional, Sensitivity -39dB +/-2dB  
**Temperature:** Operation -40+85, storage -40+85  
**EMC:** Emissions EN300 394-1, Immunity EN301 489-1 and EN30 489-18, Radiated EN61000-4-3, ESD EN 61000-4-2

DESCRIPTION	PART NUMBER
XG C-C1 RSM,Com-Control, PTT, M4	M50192-15010A
XG C-C1 RSM,Com-Control, PTT, M7	M52132-15010A



**XG**

**Headsets**



**XG HC-1 BONE CONDUCTIVE MICROPHONE HEADSET**

**Weight:** 90g **Microphone:** Vibration transducer  
**Current Drain:** 0.6mA **Receiver:** 32 ohm, Nominal 0.25W, SPL 81dB, 0.25W, 0.5m  
**Supply Voltage:** 3-10vdc, powered from Savox XG series C0C or PTT  
**Operating Temperature:** -40 to +85°C **Storage Temperature:** -40 to +85°C  
**Protection Against Dust and Water:** IP56  
**Electromagnetic Compatibility:** Emissions, EN300 394-1 immunity, EN301 489-1 and EN301 489-18 radiated, EN61000-4-3 ESD, EN61000-4-2

DESCRIPTION	PART NUMBER
XG HC-1, Short Mic Arm, Coiled CableQR5	LX52000

\*Available in Classic line and XG line



**XG HC-2 BONE CONDUCTIVE MICROPHONE HEADSET**

**Weight:** 110g **Microphone:** Vibration transducer  
**Current Drain:** 0.6mA **Receiver:** 32 ohm, Nominal 0.25W, SPL 81dB, 0.25W, 0.5m  
**Supply Voltage:** 3-10vdc, powered from Savox XG series C0C or PTT  
**Operating Temperature:** -40 to +85°C **Storage Temperature:** -40 to +85°C  
**Protection Against Dust and Water:** IP56  
**Electromagnetic Compatibility:** Emissions, EN300 394-1 immunity, EN301 489-1 and EN301 489-18 radiated, EN61000-4-3 ESD, EN61000-4-2

DESCRIPTION	PART NUMBER
XG HC-2, 2 Speakers, Coiled Cable, QR5	LX52010

## VIGILITE

### VIGILITE

The Savox covert and semi-covert product line for digital and analogue two-way radios. This product line offers simple, discrete and easy to use products for the federal and governmental services as well as private and public security type of end users.



### Covert Solutions

#### COVERT BASE UNIT (CBU) MODULAR



**Weight:** 150g **Colour:** Beige **Connector:** Radio specific  
**Microphone:** Integrated, Electret, Sensitivity -33dB, Impedance 2.2kohm  
**Loop:** Inductive, Impedance 45ohm **Wireless PTT:** Wireless Key Fob PTT not included  
**Cable Length, Connector to Transition Module:** Radio Specific  
**Cable Length, Transition Module to Mic/Inductor Lemo Connector:** 150mm  
**Cable Length, TRX/LOOP Mic/Inductor to Lemo:** 150mm  
**Cable Length, TRX/PACK Mic/Inductor to Lemo:** 300mm  
**Cable Length, TRX/FLEX Mic/Inductor to Lemo:** 300mm

DESCRIPTION	PART NUMBER
CBU Modular Covert Base Unit, M4	193004001+09013
CBU Modular Covert Base Unit, M5	193004001+09017
CBU Modular Covert Base Unit, M6	193004001+09014
CBU Modular Covert Base Unit, M7	193004001+09026
CBU Modular Covert Base Unit, M11	193004001+09034
CBU Modular Covert Base Unit, SP1	193004001+22002
CBU Modular Covert Base Unit, SP2	193004001+22003
CBU Modular Covert Base Unit, C4	193004001+31001
CBU Modular Covert Base Unit, C5	193004001+31002
CBU Modular Covert Base Unit, HY3	193004001+52001
CBU Modular Covert Base Unit, HR6	193004001+32001

## VIGILITE

### Covert Solutions

#### CBU MODULAR COVERT KITS WITH EARPIECE & KEYFOB



**Microphone:** Integrated, Electret, Sensitivity -33dB, Impedance 2.2kohm  
**Loop:** Inductive, Impedance 45ohm    **PTT:** Key Fob Wireless Dual PTT

DESCRIPTION	PART NUMBER
Kit, CBU, KF, RCR3, Medium Hue Earpiece, M6	1928-11-001
Kit, CBU, KF, RCR6, Medium Hue Earpiece, M6	1928-11-002
Kit, CBU, KF, RCR3, Medium Hue Earpiece, M7	1928-11-003
Kit, CBU, KF, RCR6, Medium Hue Earpiece, M7	1928-11-004
Kit, CBU, KF, RCR3, Medium Hue Earpiece, HR6	1928-11-007
Kit, CBU, KF, RCR6, Medium Hue Earpiece, HR6	1928-11-008

\*To order a different colour earpiece, please see page 26 for more details.

## VIGILITE

### Covert Solutions



#### CLARITY INTERFERENCE FREE WIRELESS COVERT INDUCTIVE LOOP

**Weight:** 140g **Colour:** Beige **In-Line PTT:** Wireless Key Fob PTT not included  
**Microphone:** Integrated, Electret, Sensitivity -33dB, Impedance 2.2kohm  
**Loop:** Inductive, Impedance 45ohm **Connector:** Radio Specific

DESCRIPTION	PART NUMBER
Clarity Covert Inductive Loop, Integrated Mic, M6	193003001+09014
Clarity Covert Inductive Loop, Integrated Mic, M7	193003001+09026
Clarity Covert Inductive Loop, Integrated Mic, M11	193003001+09034
Clarity Covert Inductive Loop, Integrated Mic, SP1	193003001+22002
Clarity Covert Inductive Loop, Integrated Mic, SP2	193003001+22003
Clarity Covert Inductive Loop, Integrated Mic, C4	193003001+31001
Clarity Covert Inductive Loop, Integrated Mic, C5	193003001+31002
Clarity Covert Inductive Loop, Integrated Mic, HY3	193003001+52001
Clarity Covert Inductive Loop, Integrated Mic, HR6	193003001+32001



#### CLARITY COVERT KITS WITH EARPIECE & KEYFOB

**Weight:** 140g **Colour:** Beige **Connector:** Radio Specific  
**PTT:** Key Fob Wireless Dual PTT **Loop:** Inductive, Impedance 45ohm  
**Microphone:** Integrated, Electret, Sensitivity -33dB, Impedance 2.2kohm  
**Cable Length, Connector to Transition Module:** Radio Specific  
**Cable Length, Transition Module to Neckloop Mic/Inductor:** 300mm  
**Cable Length, Mic/Inductor Circumference:** 740mm

DESCRIPTION	PART NUMBER
Kit, Clarity, KF, RCR7, Medium Hue Earpiece, M6	1928-21-001
Kit, Clarity, KF, RCR7, Medium Hue Earpiece, M7	1928-21-002
Kit, Clarity, KF, RCR7, Medium Hue Earpiece, HR6	1928-21-004

\*To order a different colour earpiece, please see page 26 for more details.

## VIGILITE

### Covert Solutions

#### SEP110, COVERT, INDUCTIVE LOOP, BASE UNIT



**Microphone:** Integrated, Electret, Impedance 2.2kohm, Sensitivity -33dB  
**Inductive Method:** Loop **PTT:** Single Barrel Type PTT

DESCRIPTION	PART NUMBER
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, K2	193002001+06-004
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, K1	193002001+06-006
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M1	193002001+09-007
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M4	193002001+09-013
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M6	193002001+09-014
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M5	193002001+09-017
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M7	193002001+09-026
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M9	193002001+09-028
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M10	193002001+09-033
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, M11	193002001+09-034
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, Y6	193002001+15-010
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, SP1	193002001+22-002
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, SP2	193002001+22-003
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, C4	193002001+31-001
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, C5	193002001+31-002
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, HR6	193002001+32-001
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, MA3	193002001+51-001
SEP110 Inductive Loop, Integrated Mic, Barrel PTT, HY3	193002001+52-001

#### SEP110 INDUCTIVE NECKLOOP COVERT KIT



**Weight:** 98g **Colour:** Beige **Connector:** Radio specific  
**Microphone:** Integrated, Electret, Impedance 2.2kohm, Sensitivity -33 dB ref 1V/Pascal  
**Loop:** Inductive, Impedance 45ohm **PTT:** Single Barrel Type  
**Cable Length, LOOP to Circumference:** 740mm  
**Cable Length, Splitter to LOOP:** 300mm straight  
**Cable Length, Splitter to PTT:** 1020mm straight

#### \*SEP110 INDUCTIVE LOOP COVERT KITS WITH EARPIECE

DESCRIPTION	PART NUMBER
Kit, SEP110, RCR3, Medium Hue Earpiece, M6	1928-01-001
Kit, SEP110, RCR6, Medium Hue Earpiece, M6	1928-01-002
Kit, SEP110, RCR3, Medium Hue Earpiece, M7	1928-01-003
Kit, SEP110, RCR6, Medium Hue Earpiece, M7	1928-01-004
Kit, SEP110, RCR6, Medium Hue Earpiece, M9	1928-01-006

\*To order a different colour earpiece, please see page 26 for more details.

## VIGILITE

### Covert Solutions



#### SEP120, COVERT, INDUCTIVE BROOCH, BASE UNIT

**Microphone:** Integrated, Electret, Impedance 2.2kohm, Sensitivity -33dB  
**Inductive method:** Brooch **PTT:** Single Barrel Type PTT

DESCRIPTION	PART NUMBER
SEP120 Inductive Brooch, Barrel PTT, K2	193001001+06-004
SEP120 Inductive Brooch, Barrel PTT, K1	193001001+06006
SEP120 Inductive Brooch, Barrel PTT, M1	193001001+09007
SEP120 Inductive Brooch, Barrel PTT, M4	193001001+09013
SEP120 Inductive Brooch, Barrel PTT, M6	193001001+09014
SEP120 Inductive Brooch, Barrel PTT, M5	193001001+09017
SEP120 Inductive Brooch, Barrel PTT, M7	193001001+09026
SEP120 Inductive Brooch, Barrel PTT, M11	193001001+09034
SEP120 Inductive Brooch, Barrel PTT, Y6	193001001+15010
SEP120 Inductive Brooch, Barrel PTT, SP1	193001001+22002
SEP120 Inductive Brooch, Barrel PTT, SP2	193001001+22003
SEP120 Inductive Brooch, Barrel PTT, C5	193001001+31002
SEP120 Inductive Brooch, Barrel PTT, HR6	193001001+32001
SEP120 Inductive Brooch, Barrel PTT, MA3	193001001+51001
SEP120 Inductive Brooch, Barrel PTT, HY3	193001001+52001



#### SEP120 INDUCTIVE BROOCH KIT WITH EARPIECE

**Weight:** 75g **Colour:** Beige **Connector:** Radio specific  
**Microphone:** Integrated, Electret, Impedance 2.2kohm, Sensitivity -33dB ref 1V/Pascal  
**Brooch:** Inductive, Impedance 8ohm **PTT:** Single Barrel Type  
**Cable Length:** Splitter to PACK 460mm straight, Splitter to PTT 1020mm straight

DESCRIPTION	PART NUMBER
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR3, M6	1928-31-001
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR6, M6	1928-31-002
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR3, M7	1928-31-003
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR6, M7	1928-31-004
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR3, Y6	1928-31-005
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR6, Y6	1928-31-006
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR3, HR6	1928-31-007
SEP120 Inductive Brooch Kit, Integrated Mic, Barrel PTT, RCR6, HR6	1928-31-008

\*To order a different colour earpiece, please see page 26 for more details.

## VIGILITE

### Headsets

#### EM2 C-HOOK EARPIECE



**Weight:** 16g **Colour:** Black **Connector:** 2.5mm, 3.5mm direct fit to radios  
**Speaker:** Impedance 32ohm **Cable Length:** 100mm coiled, 430mm straight

DESCRIPTION	PART NUMBER
EM2 C-Hook Earpiece, 2.5mm connector	1915-01-001
EM2 C-Hook Earpiece, 3.5mm connector	1915-01-002
EM2 C-Hook Earpiece, 1.2M(Long), 3.5mm connector	1915-01-003

#### SEP 190 KIT



**Weight:** 45g **Colour:** Black **Connector:** Radio specific  
**Speaker:** Impedance 32 Ohm **Microphone:** Sensitivity -43dB  
**Cable Length, Earpiece to PTT:** 100mm coiled, 430mm straight  
**Cable Length, PTT to Plug:** 880mm straight

DESCRIPTION	PART NUMBER
SEP190 Lapel Mic PTT Kit, C-Hook Earpiece, M1	1915-01-011
SEP190 Lapel Mic PTT Kit, C-Hook Earpiece, M4	1915-01-012
SEP190 Lapel Mic PTT Kit, C-Hook Earpiece, M5	1915-01-013
SEP190 Lapel Mic PTT Kit, C-Hook Earpiece, M7	1915-01-014

### Semi-Covert Solutions

#### S1-7702 SERIES MODULAR COVERT KITS



**Weight:** 53g **Colour:** Black  
**Speaker:** Modular (not included) **Microphone:** Sensitivity -43dB

DESCRIPTION	PART NUMBER
S1-7702 Lapel Mic PTT, DIN, K1	1928-41-001
S1-7702 Lapel Mic PTT, DIN, M1	1928-41-002
S1-7702 Lapel Mic PTT, DIN, M4	1928-41-003
Acoustic Tube & Speaker, DIN	1915-04-003
D-Shaped Rubber Earpiece, DIN	1915-04-004
G-Shaped Universal Earpiece, DIN	1915-04-005
Twin White MP3 Earpieces, DIN	1915-04-006

## VIGILITE

### Semi-Covert Solutions

#### S1-7700 1-WIRE KIT



**Weight:** 28g **Colour:** Black **Connector:** 2.5mm, 3.5mm direct fit to radios  
**Speaker:** Impedance 32 Ohms **Cable Length:** 110mm coiled, 210mm straight

DESCRIPTION	PART NUMBER
S1-7700 1-Wire Series Listen Only Earpiece, 2.5mm connector	1915-04-001
S1-7700 1-Wire Series Listen Only Earpiece, 3.5mm connector	1915-04-002

#### S1-8800 2-WIRE KIT



**Weight:** 50g **Colour:** Black or Beige **Connector:** Radio specific  
**Speaker:** Impedance 32 Ohms  
**Cable Length:** Plug to Earpiece: 1m straight, Plug to Mic/PTT 1m straight  
**Made in the USA**

DESCRIPTION	PART NUMBER
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, M1	1915-04-011
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, K1	1915-04-012
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, S2	1915-04-013
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, Y3	1915-04-014
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, M4	1915-04-015
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, M5	1915-04-016
S1-8800 2-Wire Series Semi-Covert Lapel Mic PTT, Acoustic Airtube, M7	1915-04-017



## VIGILITE

### Accessories

#### COVERT ACCESSORIES



DESCRIPTION	PART NUMBER
TRX Pack for CBU Module	1928-91-001
TRX Loop for CBU Module	1928-91-003
CKPTT1 Car Key Fob PTT Remote (PTT/Tones)	1928-91-011
CKPTT2 Car Key Fob PTT Remote (PTT/PTT)	1928-91-012

#### COVERT CARRYING SOLUTIONS



UCH-1



UCH-100



UTH



ULLH

DESCRIPTION	PART NUMBER
UCH-1 Shoulder Harness, White	1928-91-021
UCH-1 Shoulder Harness, White (Large)	1928-91-021L
UCH-1 Shoulder Harness, Black	1928-91-028
UCH-1 Shoulder Harness, Black (Large)	1928-91-028L
UCH-100 Covert Vest, White (Medium)	1928-91-022M
UCH-100 Covert Vest, White (Large)	1928-91-022L
UCH-100 Covert Vest, White (XL)	1928-91-022XL
UCH-100 Covert Vest, White (XXL)	1928-91-022XXL
UCH-100 Covert Vest, Black (Medium)	1928-91-029M
UCH-100 Covert Vest, Black (Large)	1928-91-029L
UCH-100 Covert Vest, Black (XL)	1928-91-029XL
UCH-100 Covert Vest, Black (XXL)	1928-91-029XXL
UTH-1 Thigh Harness, Black	1928-91-023
UTH-1 Thigh Harness, White	1928-91-025
ULLH-1 Calf Harness, Black	1928-91-024
ULLH-1 Calf Harness, White	1928-91-026

## VIGILITE

### Accessories

#### WIRELESS EARPIECES



**Weight:** 1.5g including battery, (Sub-Miniature 1.2g including battery )  
**Size:** 20mm long / end-plate oval shape 10 x 12mm (Sub-Miniature 11 x 16mm )  
**Typical Battery Life:** > 80 hours depending on use **Output SPL:** 100dB  
**Frequency Range:** 300 - 5000Hz IEC118-1 **Distortion:** Less than 3%  
**Maximum Output Sound Pressure Level:** 100 dB ±2dB  
**Battery:** 1.4VDC A10 Zinc Air **Minimum Operating Voltage:** 1.1VDC  
**Sensitivity:** 78dB@2kHz - 10mA/M **Colour:** 3 shades, Beige, Brown, Dark Brown  
**Amplifier:** Customised hybrid **Wax Filter Type:** Replaceable mesh filter  
**Operating Temperature:** -10 to 40°C  
**Conformity:** 89/336/EWG-electromagnetic compatibility

DESCRIPTION	PART NUMBER
RCR1 Standard Covert Wireless Earpiece, Medium Hue	1915-05-001
RCR1 Standard Covert Wireless Earpiece, Light Hue	1915-05-011
RCR1 Standard Covert Wireless Earpiece, Dark Hue	1915-05-021
RCR2 Standard Squelched Wireless Earpiece, Medium Hue	1915-05-002
RCR2 Standard Squelched Wireless Earpiece, Light Hue	1915-05-012
RCR2 Standard Squelched Wireless Earpiece, Dark Hue	1915-05-022
RCR3 Standard Digital Wireless Earpiece, Medium Hue	1915-05-003
RCR3 Standard Digital Wireless Earpiece, Light Hue	1915-05-013
RCR3 Standard Digital Wireless Earpiece, Dark Hue	1915-05-023
RCR6 Sub-Miniature Digital Wireless Earpiece, Medium Hue	1915-05-006
RCR6 Sub-Miniature Digital Wireless Earpiece, Light Hue	1915-05-016
RCR6 Sub-Miniature Digital Wireless Earpiece, Dark Hue	1915-05-026
RCR7 Sub-Miniature Wireless Earpiece, Medium Hue (Clarity Only)	1915-05-007
RCR7 Sub-Miniature Wireless Earpiece, Light Hue (Clarity Only)	1915-05-017
RCR7 Sub-Miniature Wireless Earpiece, Dark Hue (Clarity Only)	1915-05-027
Disposable Hygienic Metal Sleeve Earpiece Cover (Pkg of 3)	1915-90-002
Wax Traps (Pkg of 15) & Intallation Tool	1915-90-001
Zinc Air 10AE Batteries (Pkg of 6)	0201-01-016

## MISCELLANEOUS ACCESSORIES



THROAT MICROPHONE EARPIECES	
DESCRIPTION	PART NUMBER
High Noise Headset Option, 2 Pin	1915-65-003
D-Hook Over the Ear Speaker Option, 2 Pin	1915-65-004
Tactical Speaker Option (IS version), 2 Pin	1915-65-009
Tactical Speaker Option (Non-IS version), 2 Pin	1914-65-009
Inline Speaker with Acoustic Tube, 2 Pin	1915-65-010
C-Hook Behind the Ear Speaker, 2 Pin	1915-65-011
Universal Speaker, 2 Pin	1915-65-001



EAR TIPS & HEADSET ACCESSORIES	
DESCRIPTION	PART NUMBER
Spare Ear Tips (20pcs)	0103-01-004
Speaker Harness	0103-01-012
Universal Speaker Pads (5pcs)	0103-01-014
Black Acoustic Coil Tube Assembly	0513-03-001
Clear Acoustic Coil Tube Assembly	0513-03-002
Covert Black Acoustic Tube Assembly	0513-03-006
Covert Clear Acoustic Tube Assembly	0513-03-007
Skeleton Molds Set of 6 (10pcs)	0513-03-010
Tube with Female Adapter	0513-01-015



SR45 PTT ACCESSORIES	
DESCRIPTION	PART NUMBER
The Trigger Remote PTT Ring Switch, 3.5mm	1923-11-003
The Silencer Velcro Switch, 3.5mm	1923-11-005
Foot Switch with 12ft. Cable, 3.5mm	0619-01-016
Kit, Subassembly & Parts, SR45M, Tactile Switch (Radio Cable or Assembly Support not included)	1927-00-001
Kit, Subassembly & Parts, SR45M, Quiet Switch (Radio Cable or Assembly Support not included)	1927-12-000

## MISCELLANEOUS ACCESSORIES



STRAP ACCESSORIES	
DESCRIPTION	PART NUMBER
Velcro Straps, 12"	0103-01-013
Adjustable Lanyard with Breakaway & Buckle	0103-01-043
Throat Mic Strap with Buckle, Blank Ribbon, Black	2219-01-002
Throat Mic Velcro Strap, Grey Savox Logo	2219-01-020

EXTENSION & EXPANSION CABLES	
DESCRIPTION	PART NUMBER
Quick-Disconnect Expansion Cable, 36"/ 91.6cm	0302-99-001
Hirose 6 Pin (HR6) Extension Cable, 65cm (Calf Harness Length)	0302-47-001
Hirose 6 Pin (HR6) Extension Cable, 30cm (Thigh Harness Length)	0302-47-002
Lemo 3 Pin (LM3) Extension Cable (CBU TRX Pack Loop, etc.), 120cm	0302-48-001
Lemo 3 Pin (LM3) Extension Cable (CBU TRX Pack Loop, etc.), 30cm	0302-48-002
QR4 to Peltor Industrial Headset Adaptor Cable (for C-C400/440/500/550)	K50009



RADIO ADAPTORS	
DESCRIPTION	PART NUMBER
Hirose HR6 Quick-Disconnect Adaptor for MOTOROLA, M6	0314-08-001
Hirose HR6 Quick-Disconnect Adaptor for KENWOOD, K2	0314-08-002
Hirose HR6 Quick-Disconnect Adaptor for VERTEX, Y6	0314-08-003
Hirose HR6 Quick-Disconnect Adaptor for MOTOROLA, M7	0314-08-004
Hirose HR6 Quick-Disconnect Adaptor for HARRIS, MA2	0314-08-005

## COMPONENT REFERENCE GUIDE

**The Part Numbers listed in Component Reference Guide CANNOT be ordered separately and are for reference only.**



HEADSET CABLE ASSEMBLIES	
DESCRIPTION	TYPE
Savox Classic QR4 Connector, Headset, 4.7mm 4 pole	QR4
Savox XG QR5 Connector, Headset, 4.7mm 4 pole	QR5
Savox QD-T Connector, Headset, Quick-Disconnect 6 pole	QD-T

## COMPONENTS PARTS



CONNECTOR COMPATIBILITY CHART (STANDARD)	
DESCRIPTION	TYPE
<b>MOTOROLA:</b> GP1280, 140, 320, 328, 329, 338, 340, 360, 380, 640, 650, 680, HT750, HT1250, 1250LS, 1550, 1550XLS, 750, MTX8250, 8250LS, 850, 850LS, 9250, 950, 960, PR860, PRO5150, 5350, 5450, 5550, 5750, PRO7150, 7350, 7450, 7550, 7750, 9150, PTX700, 760, 780	M4
<b>MOTOROLA:</b> GP900, 9000, HT1000, JT1000, MT1500, MT2000, MTS2000, MTX8000, 838, 900, 9000, PR1500, MTX-LS, XTS1500, XTS2500, XTS3000Astro, XTS3500, 5000 <b>EF JOHNSON:</b> 51SL, 5000, 5100, 7700 Series	M6
<b>MOTOROLA:</b> TRBO, XPR6000 & XPR7000 Series, APX4000/5000/6000/7000 Series	M7
<b>KENWOOD:</b> TK2140, TK2180, TK3140, TK3148, TK280, TK290, TK380, TK390, TK480, TK481, TK190, TK3180, TK5210, TK5220, TK5310, TK5320, TK5400, NX200, NX300, NEXEDGE Series	K2
<b>HARRIS:</b> PP5300 Series, P5400 Series, P7300 Series, UNITY XG-75	MA3
<b>MOTOROLA:</b> XPR3000, XPR3500	M11
<b>ICOM:</b> IC-M88, F30G, F30GS, F30GT, F31G, F31GS, F31GT, F40G, F40GS, F40GT, F41G, F50, F50V, F60, F60V, F70, F80, F3061T/S, F3061S, F3161, F3151DS/S, F3161DT/T, F4061T/S, F4061S, F4161, F4161DS/S, F4161DT/T	S4

**COMPONENTS PARTS**



CONNECTOR COMPATIBILITY CHART (NON-STOCK)	
DESCRIPTION	TYPE
<b>ICOM:</b> F3G, F3GS, F4G, F4GS, F11, F11S, F14, F14S, F15, F21, F21S, F22, F24, F24S, F31, F33, F43	S2
<b>VERTEX:</b> VX-7R	Y7
<b>HYTERA:</b> PD705, PD765	HY3
<b>SEPURA:</b> SRH3900	SP1
<b>SEPURA:</b> STP8000	SP2
<b>MOTOROLA:</b> EX500, EX560XLS, 600, GL2000, GP328PLUS, 338PLUS, GP344, 388, PRO5150ELITE <b>HYT:</b> TC610P, TC780 <b>RELM:</b> RPU3000, 3600, RPU3000, 3600, 3300C, 7500	M5
<b>ICOM:</b> IC-F3, F3S, F30G, F31, F4, F4S, FTR, F10, F20, H2, H6, J12, M5, U12, U16, 4008, 4088A <b>MAXON:</b> SL25, SL55, SP100, SP120, SP130, PL2215, PL24125, PL2445, COBRA 2 PIN <b>VERTEX:</b> VX-200, VX-500, VX-510 <b>RITRON:</b> PATRIOT Series RTX, SST, JOBCOM JMX, MBX	S1
<b>VERTEX:</b> VX130, VX160, VX180, VX210, VX210A, VX230 Series, VX350, VX400, VX410, VX420, VX351, VX354, VX231, VX451, VX454, VX459	Y3
<b>VERTEX:</b> MH-360M, MH-450M, MH-50A7A, VH-110, VH-115M, VH-120/130/215M/225M, VX-600/800/900	Y5
<b>VERTEX:</b> VX820, VX920, VX824, VX924, VXD720	Y6
<b>HARRIS (M/ACOM):</b> 700P, P7100, P7130, P7150, P5100, P5130, P5150, P7200, P7270	MA2

## COMPONENTS PARTS



RADIO CABLE ASSEMBLIES (NON-STANDARD/ NON-STOCK)	
DESCRIPTION	TYPE
<b>KENWOOD:</b> TK208, TK220, TK240, TK240D, TK248, TK250, TK260, TK260G, TK270, TK270G, TK308, TK320, TK340, TK340D, TK348, TK350, TK353, TK360, TK360G, TK370, TK370G, TK372G, TK373, TK430, TK431, TK3160, TK3170, TK3173, TK3200, TK3201, TK3202, TK3212, TK3230, TK3300, TK3360 <b>RELM:</b> RPV516A, 599A, RPU416A, 499A PLUS, RP4200	K1
<b>CASSIDIAN:</b> THR880i	C2
<b>CASSIDIAN:</b> THR9	C4
<b>CASSIDIAN:</b> Tph700	C5
<b>MOTOROLA:</b> VISAR	M2
<b>SPRINT, NEXTEL AND KYOCERA SERIES</b> i205, i215, i265, i275, i285, i305, i315, i325, i335, i355, i365, i415, i450, i465, i530, i560, i570, i576, i580, i605, i615, i670, i680, i710, i720, i730, i733, i736, i740, i760, i776, i830, i833, i835 Roxy, i835, i850, i855, i860, i870, i875, i880, i890, i920, i930, ic402, ic502, ic602, ic902	M8
<b>MOTOROLA:</b> MTH850	M9
<b>MOTOROLA:</b> CP100, CP125, CP150, CP185, CP200, CT150, CT450, CT450LS, DTR Series, GP2000, GP300, P1225, P1225LS, PR400, PRO3150, SP10, SP21, SP50, XTN446, XTN500, XTN600, XV1100, XV2100, XU1100, XU2100, XU2600, VL130, VL50 <b>RELM:</b> RP6500 <b>HYT:</b> TC500, TC600, TC610, TC700	
<b>MOTOROLA:</b> SLR7550, SL4000, SL4010	M10