




OSCAR

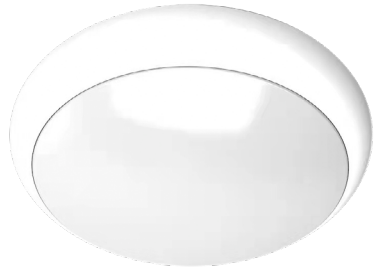

DUAL POWER / COLOUR BULKHEAD

12W/18W	50K LIFESPAN (HRS)	120° BEAM ANGLE	IK10	IP65	TPA
CE & ROHS	CLASS II	AC230V	1 YEAR WARRANTY	CRI 80	UV

FEATURES & BENEFITS

- 12W/18W – Upto 1840lm
- IP rating - IP65
- IK10 rating
- Four conduit entry knockouts on each side and two rear entry points/knock-outs
- Besa box mounting option
- 320mm with a low profile depth 75mm
- TPA Rated and UV Stabilised
- Available black or white bezel
- CCT Switchable – 3000K, 4000K, 6000K
- Switchable Lamp – standard, sensor adjustable, emergency, combined adjustable and emergency
- Ideal wall / ceiling mountable luminaire for internal & external
- 1 year warranty

DIMENSIONS



DIP SWITCH SETTING

Detection Area (Sensitivity)

	1	2	3	
I	ON	ON	ON	100%
II	—	ON	ON	75%
III	ON	—	ON	50%
IV	—	—	ON	25%
V	—	—	—	10%

Hold Time

	4	5	6	
I	ON	ON	ON	5S
II	—	ON	ON	30S
III	ON	—	ON	90S
IV	—	—	ON	3min
V	ON	ON	—	20min
VI	—	—	—	30min

Daylight Threshold


	6	7	8	
I	ON	ON	ON	2Lux
II	ON	ON	—	10Lux
III	—	ON	—	25Lux
IV	ON	—	—	50Lux
V	—	—	—	Disable*

SPECIFICATIONS

Product Code	Description	Power	Colour	Lumens	Dimensions
OSCAR-CCT	Standard	12/18W	3K, 4K, 6K	12W 3K – 1200lm, 4K – 1220lm, 6K – 1240lm 18W 3K – 1800lm, 4K – 1820lm, 6K – 1840lm	320 x 75mm
OSCAR-SEN	Sensor Adjustable	12/18W	3K, 4K, 6K	12W 3K – 1200lm, 4K – 1220lm, 6K – 1240lm 18W 3K – 1800lm, 4K – 1820lm, 6K – 1840lm	320 x 75mm
OSCAR-EM	Emergency	12/18W	3K, 4K, 6K	12W 3K – 1200lm, 4K – 1220lm, 6K – 1240lm 18W 3K – 1800lm, 4K – 1820lm, 6K – 1840lm	320 x 75mm
OSCAR-COM	Sensor Adjustable & Emergency	12/18W	3K, 4K, 6K	12W 3K – 1200lm, 4K – 1220lm, 6K – 1240lm 18W 3K – 1800lm, 4K – 1820lm, 6K – 1840lm	320 x 75mm




BLACK BEZEL

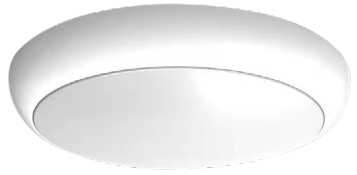

WHITE BEZEL



DUAL POWER

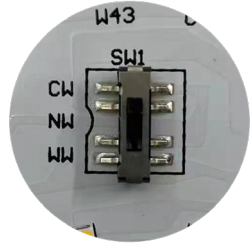

COLOUR CHANGING



FOUR KNOCKOUT ENTRIES ON EACH SIDE



BESA BOX MOUNTING OPTION



BEZEL'S HAVE KNOCKOUTS TO ALLOW FOR INTALLATION WITH CONDUIT



IP65 RATING



IK10 RATING



320MM DIAMETER WITH A
LOW PROFILE 75MM



SENSOR



EMERGENCY



COMBINED SENSOR
& EMERGENCY