




CCT DIP SWITCH



Compatible Emergency Pack & Dimmable Driver



Flex Pack



Dimmable Driver

6W CCT ROUND PANEL

TRI-COLOUR RECESSED PANEL

6W

30K
LIFESPAN (HRS)



120° BEAM ANGLE

IP54

CE &
ROHS

2 YEARS
WARRANTY




AC220-240V

CRI
80

FEATURES & BENEFITS

- Colour switchable panel - 3000K, 4000K & 6000K
- Ultra thin – 9mm profile
- Even light distribution
- 30,000 hours
- IP Rating - IP54
- Available in 6W, 12W & 18W
- Dimmable driver available
- Emergency Pack available
- Ideal for receptions, entrance foyers, corridors, stairwells, offices
- 2 year warranty

DIMENSIONS




SPECIFICATIONS

Product Code	Power	Colour	Lumens	Output Voltage	Output Current	Dimensions	Cutout
SL-RP6W-CCT	6W	3000K 4000K 6000K	3000K - 550lm 4000K - 600lm 6000K - 650lm	24-42V	300mA	120 x 9mm	Ø 100mm

SPECIFICATIONS

Product Code	Description	Output Voltage	Dimensions
RP-6W-12W	6W & 12W Dimmable Driver	24-42V	89 x 38 x 22

CCT DIP SWITCH



Compatible Emergency Pack & Dimmable Driver



Flex Pack



Dimmable Driver

12W CCT ROUND PANEL


TRI-COLOUR RECESSED PANEL

12W	30K LIFESPAN (HRS)	120° BEAM ANGLE	IP54
CE & ROHS	2 YEARS WARRANTY	AC220-240V	CRI 80

FEATURES & BENEFITS

- Colour switchable panel - 3000K, 4000K & 6000K
- Ultra thin – 9mm profile
- Even light distribution
- 30,000 hours
- IP Rating - IP54
- Available in 6W, 12W & 18W
- Dimmable driver available
- Emergency Pack available
- Ideal for receptions, entrance foyers, corridors, stairwells, offices
- 2 year warranty

DIMENSIONS




SPECIFICATIONS

Product Code	Power	Colour	Lumens	Output Voltage	Output Current	Dimensions	Cutout
SL-RP12W-CCT	12W	3000K	3000K - 1150lm	24-42V	300mA	Ø 170 x 9mm	Ø 150mm
		4000K	4000K - 1200lm				
		6000K	6000K - 1250lm				

SPECIFICATIONS

Product Code	Description	Output Voltage	Dimensions
RP-6W-12W	6W & 12W Dimmable Driver	24-42V	89 x 38 x 22
RP-12W-18W	12W & 18W Dimmable Driver	36-60V	100 x 43 x 23

CCT DIP SWITCH



Compatible Emergency Pack & Dimmable Driver



Flex Pack



Dimmable Driver

18W CCT ROUND PANEL

TRI-COLOUR RECESSED PANEL

18W

30K
LIFESPAN (HRS)

120°
BEAM ANGLE

IP54

CE & ROHS

2 YEARS WARRANTY

AC220-240V

CRI 80

FEATURES & BENEFITS

- Colour switchable panel - 3000K, 4000K & 6000K
- Ultra thin – 9mm profile
- Even light distribution
- 30,000 hours
- IP Rating - IP54
- Available in 6W, 12W & 18W
- Dimmable driver available
- Emergency Pack available
- Ideal for receptions, entrance foyers, corridors, stairwells, offices
- 2 year warranty

DIMENSIONS



SPECIFICATIONS

Product Codes	Power	Colour	Lumens	Output Voltage	Output Current	Dimensions	Cutout
SL-RP18W-CCT	18W	3000K 4000K 6000K	3000K - 1750lm 4000K - 1800lm 6000K - 1850lm	200-240V	300mA	Ø 223 x 9mm	Ø 200mm

SPECIFICATIONS

Product Codes	Description	Output Voltage	Dimensions
RP-12W-18W	12W & 18W Dimmable Driver	36-60V	100 x 43 x 23



FLEX - PACK

ALL-IN ONE EMERGENCY PACK COMPATIBLE WITH LED PANELS


IP20

3 YEARS WARRANTY

FEATURES & BENEFITS

- All-in-one design: constant current driver
- Efficient boosting
- Constant current recharging
- Easy installation
- High transforming efficiency
- Isolation safe design
- High power factor
- Reliable protection design in case of overload & overvoltage
- Smart automisation differs between standard lighting and emergency lighting
- Supplied with a charging indicator
- Ceiling cut out 44mm
- 3 year warranty

DIMENSIONS

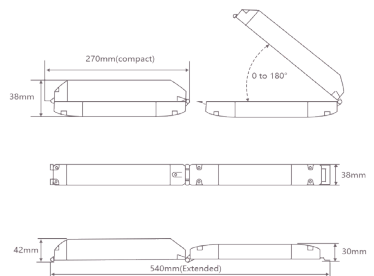

SPECIFICATIONS

Product Codes	Description	IP Rating	Battery Pack	Operating Voltage	Dimension
FLEX-PACKV2	All-in-one Emergency Pack	IP20	3.6V NiCd	230V +/- 10%	Driver section 270(l) x 38(w) x 30(h) Battery section 255(l) x 38(w) x 42(h)